


Last information update: November 2024

**Product configuration: N360+N374.04**

N360: Initial module L 3602Minimal

N374.04: Plate - wall washer - DALI - LED warm - L 1196 - 17W 2900lm - 3000K - Black



**Product code**

N360: Initial module L 3602Minimal

**Technical description**

Minimal (frameless) version extruded aluminium initial profile; a triple length version designed to house 3 x Wall Washer emission LED plates.

**Installation**

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

**Colour**

White (01) | Black (04) | Aluminium (12)

**Weight (Kg)**

8

**Mounting**

ceiling recessed|ceiling surface|ceiling pendant


**Wiring**

The initial profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks for easier luminaire installation. Set up to house the LED modules required by the system.

**Notes**

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



**Product code**

N374.04: Plate - wall washer - DALI - LED warm - L 1196 - 17W 2900lm - 3000K - Black

**Technical description**

LED module set up for housing in iN60 Wall Washer system initial or intermediate profiles. Extruded aluminium heat sink linear element, formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. Supplied with integrated dimmable DALI control gear. Warm white LED.

**Installation**

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

**Colour**

Black (04)

**Weight (Kg)**

1.94

**Mounting**

ceiling recessed|ceiling surface|ceiling pendant

**Wiring**

Quick coupling terminal block connection for simplified luminaire installation. LED module complete with integrated DALI control gear. Dimming options with DALI devices or a normally open (N.O.) pushbutton (PUSH DIM)

**Notes**

The module houses the specific optic system for wall washer emission; to ensure correct installation consult the instruction leaflet.


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	5307	CRI (minimum):	80
W system:	62.3	Colour temperature [K]:	3000
lm source:	8700	MacAdam Step:	3
W source:	51	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	85.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	1	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1

Polar

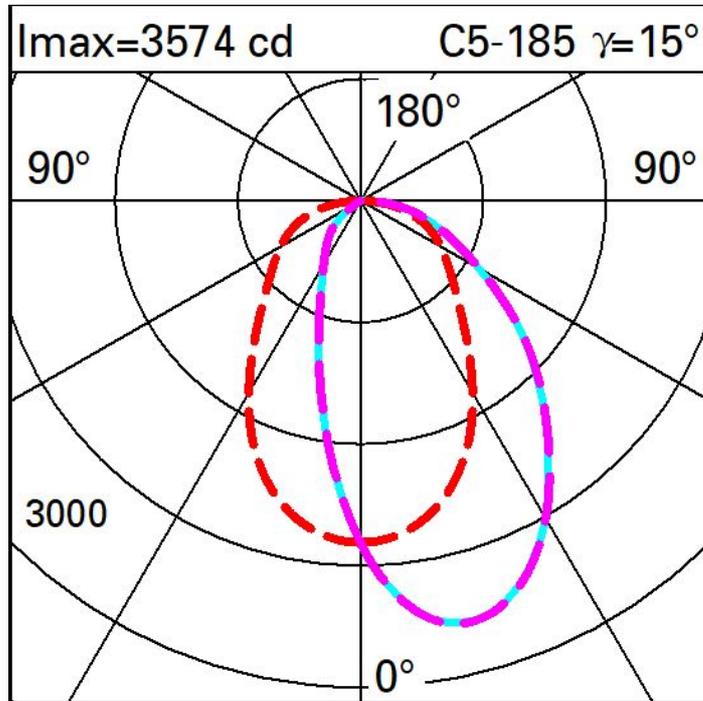

Illuminances

