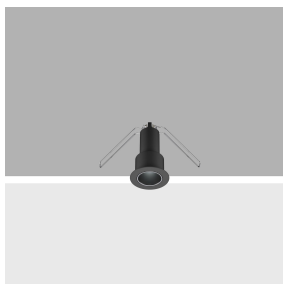


Last information update: December 2024

Product configuration: P308.43

P308.43: Fixed round mini-recessed luminaire - LED - medium - Black / Black

**Product code**

P308.43: Fixed round mini-recessed luminaire - LED - medium - Black / Black

Technical description

Fixed round mini-recessed luminaire with contact frame. The LED is set back to minimize direct glare. The recessed body is made of machined aluminium and the inside of the ring of thermoplastic available in a range of painted and metallised finishes. PMMA - medium (25°) high resolution optic lens. LED 4000K. Tool free assembly. Power unit available with a separate code no.

Installation

Recessed in a false ceiling by means of a steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 25 mm.

Colour

Black / Black (43)

Weight (Kg)

0.03

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable

Notes


The 25° optic is not available for the finishes: E4 (white - chrome) - 41 (white - gold) - E9 (white - satin finish gold) - E7 (white - burnished chrome)

Complies with EN60598-1 and pertinent regulations




IP20

IP43

On the visible part of
the product once installed**Technical data**

lm system:	153	CRI (minimum):	80
W system:	2	Colour temperature [K]:	4000
lm source:	250	MacAdam Step:	2
W source:	2	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	76.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1
Beam angle [°]:	22°	LED current [mA]:	700


Polar

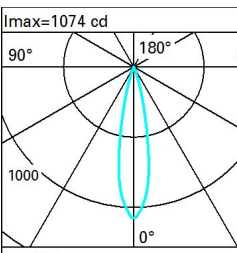Imax=1074 cd		CIE		Lux			
		nL 0.61					
		100-100-100-100-61					
		UGR <10-<10					
		DIN					
		A.61					
		UTE					
		0.61A+0.00T					
		F*1=999					
		F*1+F*2=999					
		F*1+F*2+F*3=1000					
$\alpha=21^\circ$		CIBSE					
		LG3 L<3000 cd/m² at 65°					
		UGR<10 L<3000 cd/mq @65°					
		4					
		67					

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	55	52	50	49	52	50	50	48	78
1.0	58	55	53	52	54	53	52	51	83
1.5	60	58	57	56	58	56	56	54	89
2.0	62	61	60	59	60	59	58	57	93
2.5	63	62	61	61	61	61	60	58	96
3.0	64	63	63	62	62	62	61	60	98
4.0	65	64	64	64	63	63	62	61	99
5.0	65	65	65	64	64	64	63	61	100

Luminance curve limit

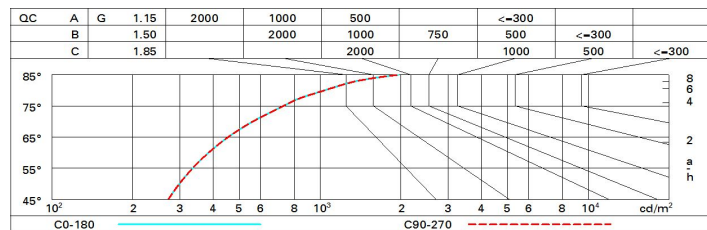

UGR diagram

Corrected UGR values (at 250 lm bare lamp luminous flux)											
Reflect.:	ceiling/cav	viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
	walls	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
	work pl.	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-12.3	-10.1	-11.9	-9.8	-9.4	-12.3	-10.1	-11.9	-9.8	-9.4
	3H	-9.4	-7.8	-9.0	-7.5	-7.2	-11.6	-10.1	-11.2	-9.7	-9.4
	4H	-7.6	-6.4	-7.2	-6.1	-5.8	-11.2	-10.0	-10.8	-9.7	-9.4
	6H	-5.6	-4.9	-5.3	-4.5	-4.2	-10.8	-10.0	-10.4	-9.7	-9.3
	8H	-4.6	-3.8	-4.3	-3.5	-3.1	-10.6	-9.8	-10.3	-9.5	-9.1
	12H	-3.5	-2.7	-3.1	-2.3	-1.9	-10.6	-9.8	-10.2	-9.4	-9.0
4H	2H	-11.2	-10.0	-10.8	-9.7	-9.4	-7.6	-6.4	-7.2	-6.1	-5.8
	3H	-8.0	-7.2	-7.6	-6.8	-6.4	-6.6	-5.8	-6.2	-5.4	-5.1
	4H	-6.2	-5.2	-5.7	-4.9	-4.4	-6.2	-5.2	-5.7	-4.9	-4.4
	6H	-4.4	-2.7	-3.9	-2.2	-1.8	-5.9	-4.2	-5.5	-3.8	-3.3
	8H	-3.4	-1.5	-2.9	-1.0	-0.5	-5.8	-3.8	-5.3	-3.4	-2.9
	12H	-2.2	-0.2	-1.7	0.3	0.8	-5.6	-3.6	-5.1	-3.2	-2.6
8H	4H	-5.8	-3.8	-5.3	-3.4	-2.9	-3.4	-1.5	-2.9	-1.0	-0.5
	6H	-3.5	-1.7	-3.0	-1.2	-0.7	-2.6	-0.9	-2.1	-0.4	0.1
	8H	-2.2	-0.7	-1.6	-0.2	0.4	-2.2	-0.7	-1.6	-0.2	0.4
	12H	-0.5	0.5	-0.0	1.0	1.6	-1.6	-0.5	-1.1	-0.0	0.5
12H	4H	-5.6	-3.6	-5.1	-3.2	-2.6	-2.2	-0.2	-1.7	0.3	0.8
	6H	-3.1	-1.6	-2.6	-1.1	-0.6	-1.2	0.3	-0.7	0.8	1.3
	8H	-1.6	-0.5	-1.1	-0.0	0.5	-0.5	0.5	-0.0	1.0	1.6
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.2					0.1 / -0.2				
	1.5H	0.2 / -0.3					0.2 / -0.3				
	2.0H	0.3 / -0.4					0.3 / -0.4				