

Laser Blade XL



Design iGuzzini

iGuzzini

Last information update: April 2025

Product configuration: P776.74

P776.74: Fixed recessed luminaire - Neutral LED - DALI dimmable control gear - Wide Flood - Grey / Black



Product code

P776.74: Fixed recessed luminaire - Neutral LED - DALI dimmable control gear - Wide Flood - Grey / Black

Technical description

Recessed luminaire with fixed optic for Neutral White LED lamp. Passive heat dissipation system. Lamp body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam optic, integrated in a set-back position in the anti-glare screen. Glass cover for LED lamp. The structure of the optic system produces light emission with controlled luminance ($UGR < 19$) to guarantee high visual comfort. Supplied with a dimmable DALI ballast connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 125 x 125. Installation possible in a horizontal position.

Colour

Grey / Black (74)*

Weight (Kg)

0.86

* Colours on request

Mounting

ceiling recessed

Wiring

Quick-coupling connections on the ballast unit terminal block - Digital electronic cabling that allows dimming to be performed with DALI protocol or pushbutton systems (TOUCH DIM)

Notes

The product has a white finish (01) that maintains its $UGR < 19$ performance unaltered even when luminance values vary slightly.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2430	CRI (minimum):	80
W system:	23.3	Colour temperature [K]:	4000
Im source:	3200	MacAdam Step:	2
W source:	21	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	104.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	76	Number of optical assemblies:	1
Beam angle [°]:	54°	Control:	DALI-2


Polar

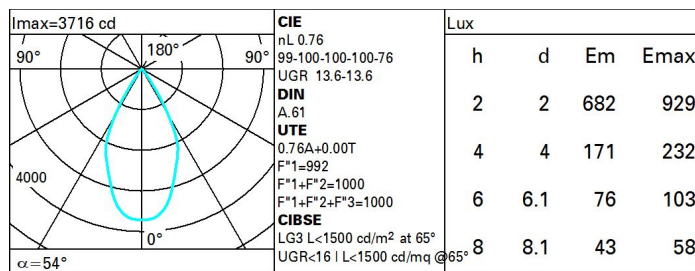

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	65	62	60	64	62	62	59	78
1.0	71	68	66	64	67	65	65	63	82
1.5	75	73	71	69	72	70	69	67	88
2.0	77	76	74	73	75	73	72	70	93
2.5	79	77	76	76	76	75	75	73	96
3.0	80	79	78	77	78	77	76	74	98
4.0	81	80	80	79	79	78	77	75	99
5.0	81	81	80	80	79	79	78	76	100

Luminance curve limit

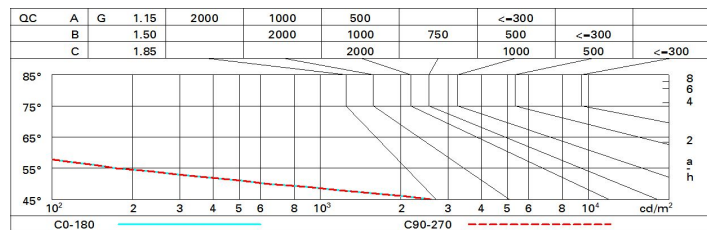

UGR diagram

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	14.2	14.8	14.5	15.0	15.3	14.2	14.8	14.5	15.0	15.3
	3H	14.1	14.6	14.4	14.9	15.2	14.1	14.6	14.4	14.9	15.2
	4H	14.0	14.5	14.3	14.8	15.1	14.0	14.5	14.3	14.8	15.1
	6H	13.9	14.4	14.3	14.7	15.0	13.9	14.4	14.3	14.7	15.0
	8H	13.9	14.3	14.3	14.7	15.0	13.9	14.3	14.3	14.7	15.0
	12H	13.9	14.3	14.2	14.6	15.0	13.9	14.3	14.2	14.6	15.0
4H	2H	14.0	14.5	14.3	14.8	15.1	14.0	14.5	14.3	14.8	15.1
	3H	13.9	14.3	14.2	14.6	15.0	13.9	14.3	14.2	14.6	15.0
	4H	13.8	14.1	14.2	14.5	14.9	13.8	14.1	14.2	14.5	14.9
	6H	13.7	14.0	14.1	14.4	14.8	13.7	14.0	14.1	14.4	14.8
	8H	13.6	13.9	14.1	14.3	14.8	13.6	13.9	14.1	14.3	14.8
	12H	13.6	13.9	14.0	14.3	14.7	13.6	13.9	14.0	14.3	14.7
8H	4H	13.6	13.9	14.1	14.3	14.8	13.6	13.9	14.1	14.3	14.8
	6H	13.5	13.8	14.0	14.2	14.7	13.5	13.8	14.0	14.2	14.7
	8H	13.5	13.7	14.0	14.2	14.7	13.5	13.7	14.0	14.2	14.7
	12H	13.4	13.6	13.9	14.1	14.6	13.4	13.6	13.9	14.1	14.6
12H	4H	13.6	13.9	14.0	14.3	14.7	13.6	13.9	14.0	14.3	14.7
	6H	13.5	13.7	14.0	14.2	14.7	13.5	13.7	14.0	14.2	14.7
	8H	13.4	13.6	13.9	14.1	14.6	13.4	13.6	13.9	14.1	14.6
Variations with the observer position at spacing:											
S =	1.0H	6.4 / -27.7					6.4 / -27.7				
	1.5H	9.2 / -31.6					9.2 / -31.6				
	2.0H	11.2 / -32.7					11.2 / -32.7				