

Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: April 2025

Product configuration: PI06

PI06: Frame adjustable 2 x 15-cell recessed luminaire - LED DALI dimmable power supply



Product code

PI06: Frame adjustable 2 x 15-cell recessed luminaire - LED DALI dimmable power supply

Technical description

Recessed rectangular luminaire with LEDs. Shaped steel sheet structural compartment with outer rim. The two linear elements with 15 lighting cells, in die-cast aluminium and independently adjustable, can be used to direct the emission with a tilting adjustability of +/- 20°. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and controlled glare emission. Supplied with DALI dimmable power supply connected to the luminaire.

Installation

recessed with mechanical blocking system for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal)

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

1.65

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

on power supply box: screw connections.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	4494	CRI (minimum):	90
W system:	48	Colour temperature [K]:	3500
lm source:	2740	MacAdam Step:	3
W source:	21	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	93.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	2
Beam angle [°]:	42°	Control:	DALI-2


Polar

	CIE			
	nL 0.82			
	100-100-100-100-82			
	UGR 15.0-15.0			
	DIN A.61			
	UTE			
	0.82A+0.00T			
	F*1=996			
	F*1+F*2=1000			
	F*1+F*2+F*3=1000			
	CIBSE			
	LG3 L<1500 cd/m² at 65°			
	UGR<16 L<1500 cd/mq @65°			
	Lux			
	h	d	Em	Emax
	2	1.5	874	1090
	4	3.1	219	272
	6	4.6	97	121
	8	6.1	55	68

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	65	70	67	67	64	78
1.0	77	74	71	70	73	71	70	68	83
1.5	81	78	76	75	78	76	75	73	89
2.0	84	82	80	79	81	79	78	76	93
2.5	85	84	83	82	83	82	81	78	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	81	99
5.0	88	87	87	87	86	85	84	82	100

Luminance curve limit

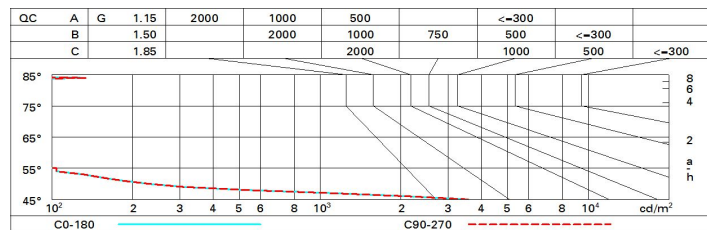

UGR diagram

Corrected UGR values (at 2740 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	15.5	16.1	15.8	16.3	16.5	15.5	16.1	15.8	16.3	16.5
	3H	15.4	15.9	15.7	16.1	16.4	15.4	15.9	15.7	16.1	16.4
	4H	15.3	15.8	15.7	16.1	16.4	15.3	15.8	15.7	16.1	16.4
	6H	15.3	15.7	15.6	16.0	16.3	15.3	15.7	15.6	16.0	16.3
	8H	15.2	15.6	15.6	15.9	16.3	15.2	15.6	15.6	15.9	16.3
	12H	15.2	15.6	15.5	15.9	16.2	15.2	15.6	15.5	15.9	16.2
4H	2H	15.3	15.8	15.7	16.1	16.4	15.3	15.8	15.7	16.1	16.4
	3H	15.2	15.6	15.5	15.9	16.2	15.2	15.6	15.5	15.9	16.2
	4H	15.1	15.4	15.5	15.8	16.2	15.1	15.4	15.5	15.8	16.2
	6H	15.0	15.3	15.4	15.7	16.1	15.0	15.3	15.4	15.7	16.1
	8H	15.0	15.2	15.4	15.6	16.1	15.0	15.2	15.4	15.6	16.1
	12H	14.9	15.1	15.4	15.6	16.0	14.9	15.1	15.4	15.6	16.0
8H	4H	15.0	15.2	15.4	15.6	16.1	15.0	15.2	15.4	15.6	16.1
	6H	14.9	15.1	15.3	15.5	16.0	14.9	15.1	15.3	15.5	16.0
	8H	14.8	15.0	15.3	15.5	15.9	14.8	15.0	15.3	15.5	15.9
	12H	14.7	14.9	15.2	15.4	15.9	14.7	14.9	15.2	15.4	15.9
12H	4H	14.9	15.1	15.4	15.6	16.0	14.9	15.1	15.4	15.6	16.0
	6H	14.8	15.0	15.3	15.5	15.9	14.8	15.0	15.3	15.5	15.9
	8H	14.7	14.9	15.2	15.4	15.9	14.7	14.9	15.2	15.4	15.9
Variations with the observer position at spacing:											
S =	1.0H	6.3 / -34.2					6.3 / -34.2				
	1.5H	9.1 / -35.8					9.1 / -35.8				
	2.0H	11.1 / -37.1					11.1 / -37.1				