

Last information update: November 2024

Product configuration: Q367+QH87.12

Q367: Minimal continuous line moduleGeneral Down LightL3594

QH87.12: Plate - General Down Light - ON-OFF - Warm LED - L 3588 - 104W 11265lm - 3000K - Aluminium

**Product code**

Q367: Minimal continuous line moduleGeneral Down LightL3594

Technical description

Minimal (frameless) version extruded aluminium intermediate profile for flush with ceiling mounting; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal screen (diffused general light); screen set up for connecting several lengths by overlapping.

Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

Colour

White (01) | Aluminium (12)

Weight (Kg)

8.5

Mounting

ceiling recessed|wall surface|ceiling surface|ceiling pendant

Wiring

Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

TPb rated. TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



IP20

**Product code**

QH87.12: Plate - General Down Light - ON-OFF - Warm LED - L 3588 - 104W 11265lm - 3000K - Aluminium **Attention! Code no longer in production**

Technical description

LED module set up for housing in initial or intermediate system profiles, ideal for particularly long light lines. Emission for General Light profiles (with opal diffuser screen). Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm 3000K LED

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00) | White (01)

Weight (Kg)

4.1

Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated ON-OFF - non-dimmable control gear.

Notes

Important: the triple length intermediate luminous module can be used for both initial profiles - L 3594 - for stand-alone applications, and intermediate profiles - L 3594 - for continuous line applications.

Complies with EN60598-1 and pertinent regulations



IP20




pending

Technical data

lm system:	11137	Colour temperature [K]:	3000
W system:	103.1	MacAdam Step:	3
lm source:	15050	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	90	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	108	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	74	Number of optical assemblies:	1
CRI (minimum):	80		

Polar

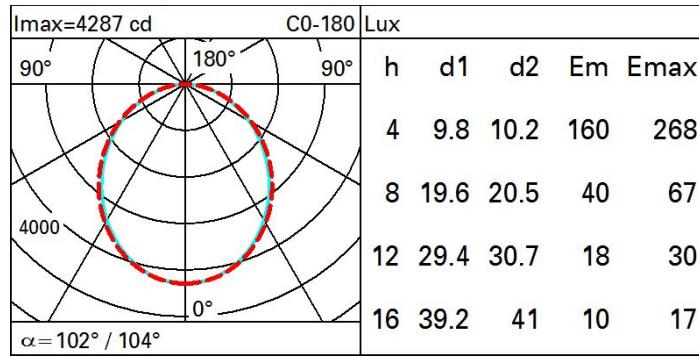

Isolux

