

Last information update: November 2024

**Product configuration: Q369+Q419.12**

Q369: Minimal initial moduleGeneral Up/Down LightL 2397

Q419.12: Plate - General Up / Down Light - DALI - Warm LED - L 1196 - 50.7W 5134lm - 3000K - Aluminium

**Product code**

Q369: Minimal initial moduleGeneral Up/Down LightL 2397

**Technical description**

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up-down emission; methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

**Installation**

Installation can be pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

**Colour**

White (01) | Aluminium (12)

**Weight (Kg)**

5.9

**Mounting**

wall surface|ceiling pendant

**Wiring**

Set up to house the up-down LED modules required by the system.

**Notes**

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



IP20

**Product code**

Q419.12: Plate - General Up / Down Light - DALI - Warm LED - L 1196 - 50.7W 5134lm - 3000K - Aluminium

**Technical description**

LED module set up for housing in initial or intermediate system profiles - up + down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

**Installation**

Module insertion on profiles facilitated by a quick coupling system.

**Colour**

Indeterminate (00)

**Weight (Kg)**

1.4

**Wiring**

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

Im system:	10268	Colour temperature [K]:	3000
W system:	101.3	MacAdam Step:	3
Im source:	15100	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	90	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	101.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	2909	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	68	Number of optical assemblies:	1
CRI (minimum):	80		

# Polar

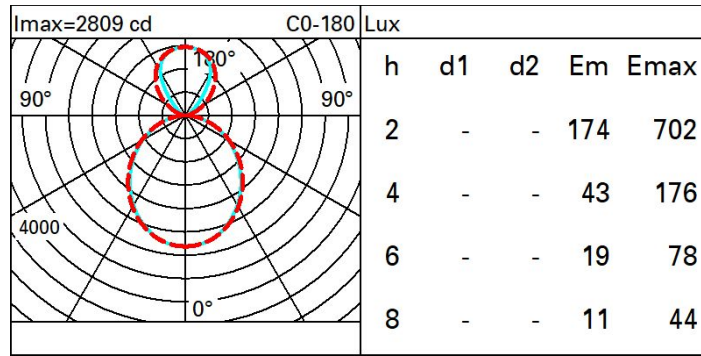

# Isolux

