

Last information update: December 2024

### Product configuration: Q415+R403.01

Q415: Plate - General Down Light - Warm LED - DALI - L 1196

R403.01: Minimal initial module - General Down Light - L 2397 - TP(a) - White



#### Product code

Q415: Plate - General Down Light - Warm LED - DALI - L 1196

#### Technical description

LED module set up for housing in initial or intermediate system profiles - down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

#### Colour

Indeterminate (00)

#### Weight (Kg)

1.37

#### Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations



#### Product code

R403.01: Minimal initial module - General Down Light - L 2397 - TP(a) - White

#### Technical description

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up-down emission; methacrylate opal screen (diffused general light) in compliance with the TP(a) standard; screen set up for connecting several lengths by overlapping.

#### Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

#### Colour

White (01)\*

#### Weight (Kg)

1.9

\* Colours on request

#### Mounting

ceiling recessed|wall surface|ceiling surface|ceiling pendant

#### Wiring

Set up to house the LED modules required by the system.

#### Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.


Complies with EN60598-1 and pertinent regulations



#### Technical data

Im system:	6293	Colour temperature [K]:	3000
W system:	66	MacAdam Step:	3
Im source:	10150	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	60	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	95.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	62	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

# Polar

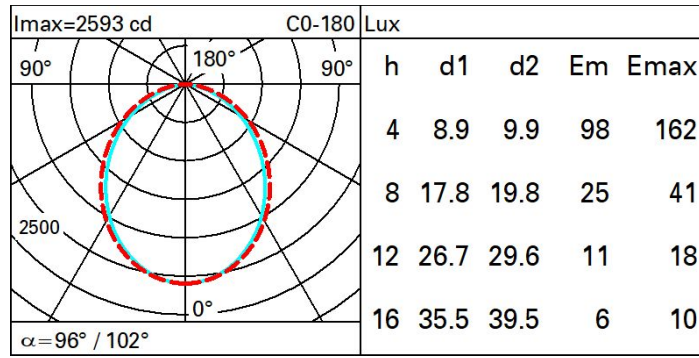

# Isolux

