


Last information update: March 2025

Product configuration: QA04.01

QA04.01: Ø59 Tech - DALI - Medium Beam - White

**Product code**

QA04.01: Ø59 Tech - DALI - Medium Beam - White

Technical description

Cylindrical lighting body for ceiling or pendant-mounted applications. Fixed optic lighting system with a high definition reflector made of metallised thermoplastic. The LEDs are set back to minimize glare and guarantee a high level of visual comfort. Structural cylinder made of painted extruded aluminium with an inner ring made of thermoplastic available in different painted or metallised finishes. Glass cover Using specific accessory kits, ceiling or pendant-mounted installations can be made with minimum intervention and simplified by a practical bayonet coupling system. DALI dimmable driver integrated in the luminaire.

Installation

Ceiling or pendant-mounted - use the appropriate assembly kits available with a separate item code.

Colour
White (01)

Weight (Kg)
0.47

Mounting

ceiling surface|ceiling pendant

Wiring

The lighting body is fitted with an internal terminal board for connectinf it to the power line or pendant cable.

Notes

A wide range of decorative accessories and diffusers is available.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	901	Colour temperature [K]:	3000
W system:	12.3	MacAdam Step:	2
Im source:	1140	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	11	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	73.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	24°	Control:	DALI-2
CRI (minimum):	90		


Polar

<p>Imax=4798 cd α=24°</p>	<p>CIE nL 0.79 100-100-100-100-79 UGR <10-<10</p> <p>DIN A.61</p> <p>UTE 0.79A+0.00T F*1=995 F*1+F*2=999 F*1+F*2+F*3=1000</p> <p>CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65°</p>	Lux			
		h	d	Em	E _{max}
		2	0.8	989	1200
		4	1.7	247	300
		6	2.5	110	133
8	3.4	62	75		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	68	65	63	67	65	64	62	78
1.0	74	71	69	67	70	68	68	65	83
1.5	78	76	74	72	75	73	72	70	88
2.0	80	79	77	76	78	76	75	73	93
2.5	82	81	80	79	80	79	78	76	96
3.0	83	82	81	81	81	80	79	77	98
4.0	84	83	83	82	82	82	80	78	99
5.0	84	84	84	83	83	82	81	79	100

Luminance curve limit

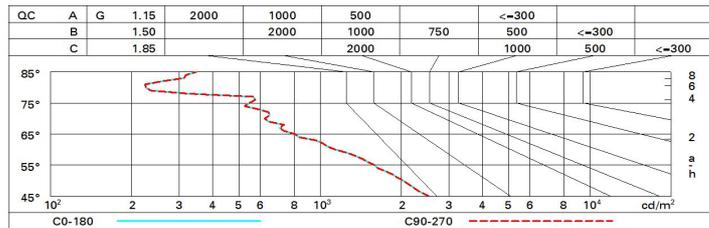

UGR diagram

Corrected UGR values (at 1140 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-1.0	1.2	-0.6	1.5	1.8	-1.0	1.2	-0.6	1.5	1.8
	3H	-0.8	0.8	-0.4	1.1	1.5	-0.9	0.7	-0.5	1.0	1.4
	4H	-0.7	0.6	-0.3	0.9	1.3	-0.9	0.4	-0.5	0.7	1.1
	6H	-0.6	0.3	-0.3	0.6	1.0	-0.9	0.1	-0.5	0.4	0.7
	8H	-0.7	0.3	-0.3	0.6	1.0	-0.9	0.0	-0.5	0.4	0.7
	12H	-0.7	0.2	-0.3	0.6	1.0	-1.0	-0.0	-0.6	0.3	0.7
4H	2H	-0.9	0.4	-0.5	0.7	1.1	-0.7	0.6	-0.3	0.9	1.3
	3H	-0.5	0.4	-0.1	0.8	1.1	-0.5	0.5	-0.1	0.8	1.2
	4H	-0.5	0.5	-0.0	0.9	1.3	-0.5	0.5	-0.0	0.9	1.3
	6H	-0.8	1.0	-0.3	1.4	1.9	-0.8	1.0	-0.3	1.4	1.9
	8H	-0.9	1.1	-0.4	1.5	2.0	-0.9	1.1	-0.4	1.5	2.0
	12H	-0.9	1.1	-0.4	1.5	2.1	-1.0	1.0	-0.5	1.5	2.0
8H	4H	-0.9	1.1	-0.4	1.5	2.0	-0.9	1.1	-0.4	1.5	2.0
	6H	-0.9	0.9	-0.4	1.4	1.9	-0.9	0.9	-0.4	1.4	1.9
	8H	-0.8	0.7	-0.3	1.2	1.8	-0.8	0.7	-0.3	1.2	1.8
	12H	-0.7	0.4	-0.1	0.9	1.4	-0.7	0.3	-0.2	0.8	1.4
12H	4H	-1.0	1.0	-0.5	1.5	2.0	-0.9	1.1	-0.4	1.5	2.1
	6H	-0.9	0.7	-0.4	1.2	1.7	-0.8	0.7	-0.3	1.2	1.8
	8H	-0.7	0.3	-0.2	0.8	1.4	-0.7	0.4	-0.1	0.9	1.4
Variations with the observer position at spacing:											
S =	1.0H	1.7 / -1.4					1.7 / -1.4				
	1.5H	3.4 / -2.9					3.4 / -2.9				
	2.0H	5.0 / -3.8					5.0 / -3.8				