


Last information update: February 2025

**Product configuration: QF61.01**

QF61.01: Ø 163 mm - neutral white - DALI - White

**Product code**

QF61.01: Ø 163 mm - neutral white - DALI - White

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in neutral white colour tone (4000K). General lighting beam.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**

White (01)

**Weight (Kg)**

0.68

**Mounting**

ceiling surface

**Wiring**

product complete with DALI components

**Notes**

TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2890	Colour temperature [K]:	4000
W system:	24.5	MacAdam Step:	2
lm source:	3400	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	21	Lamp code:	LED
Luminous efficiency (lm/W, real value):	118	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	85	Control:	DALI-2
CRI (minimum):	80		


**Polar**

<p>Imax=1624 cd α = 86°</p>	<b>CIE</b> nL 0.85 69-92-98-100-85 UGR 25.7-25.3 <b>DIN</b> A.51 <b>UTE</b> 0.85C+0.00T F*1=693 F*1+F*2=915 F*1+F*2+F*3=981				<b>Lux</b>			
	h	d	Em	Emax	h	d	Em	Emax
	1	1.9	1082	1624				
	2	3.7	270	406				
	3	5.6	120	180				
	4	7.5	68	101				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	65	58	53	49	57	52	52	47	56
1.0	70	63	59	55	62	58	57	53	62
1.5	77	72	68	65	70	67	66	62	73
2.0	81	77	74	71	75	73	72	68	80
2.5	83	80	77	75	78	76	75	71	84
3.0	85	82	80	78	80	79	77	74	87
4.0	87	84	83	81	83	81	80	77	90
5.0	88	86	84	83	84	83	81	78	92

# Luminance curve limit

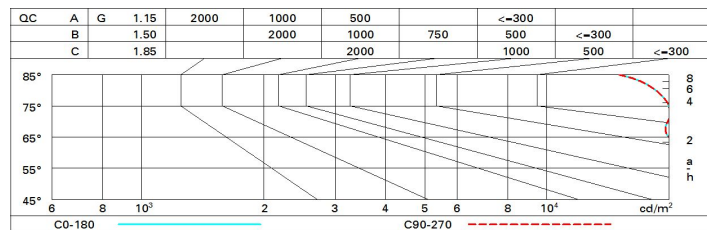

# UGR diagram

Corrected UGR values (at 3400 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	23.7	24.6	24.0	24.8	25.1	23.7	24.6	24.0	24.8	25.1
	3H	24.3	25.1	24.6	25.3	25.6	23.8	24.6	24.1	24.9	25.2
	4H	24.6	25.3	24.9	25.6	26.0	23.8	24.6	24.2	24.9	25.2
	6H	24.9	25.6	25.3	25.9	26.2	23.8	24.5	24.2	24.8	25.2
	8H	25.0	25.7	25.4	26.0	26.3	23.8	24.5	24.2	24.8	25.2
	12H	25.0	25.7	25.4	26.0	26.4	23.8	24.4	24.2	24.8	25.1
4H	2H	23.8	24.6	24.2	24.9	25.2	24.6	25.3	24.9	25.6	26.0
	3H	24.6	25.3	25.0	25.6	26.0	24.9	25.6	25.3	25.9	26.3
	4H	25.1	25.7	25.5	26.0	26.4	25.1	25.7	25.5	26.0	26.4
	6H	25.5	26.0	26.0	26.4	26.9	25.2	25.7	25.7	26.1	26.6
	8H	25.7	26.2	26.1	26.6	27.0	25.3	25.7	25.7	26.2	26.6
	12H	25.8	26.2	26.2	26.6	27.1	25.3	25.7	25.7	26.1	26.6
8H	4H	25.3	25.7	25.7	26.2	26.6	25.7	26.2	26.1	26.6	27.0
	6H	25.9	26.2	26.3	26.7	27.2	26.0	26.3	26.4	26.8	27.3
	8H	26.1	26.4	26.6	26.9	27.4	26.1	26.4	26.6	26.9	27.4
	12H	26.2	26.5	26.7	27.0	27.5	26.1	26.4	26.6	26.9	27.4
12H	4H	25.3	25.7	25.7	26.1	26.6	25.8	26.2	26.2	26.6	27.1
	6H	25.9	26.2	26.4	26.7	27.2	26.1	26.4	26.6	26.9	27.4
	8H	26.1	26.4	26.6	26.9	27.4	26.2	26.5	26.7	27.0	27.5
Variations with the observer position at spacing:											
S =	1.0H	0.6 / -0.8					0.6 / -0.8				
	1.5H	1.5 / -1.2					1.5 / -1.2				
	2.0H	2.7 / -1.4					2.7 / -1.4				