

## Laser Blade


Design iGuzzini

iGuzzini

Last information update: March 2025

### Product configuration: R618

R618: Frame recessed luminaire - 15 cells - General Lighting Pro - DALI



### Product code

R618: Frame recessed luminaire - 15 cells - General Lighting Pro - DALI

### Technical description

Rectangular recessed luminaire with 15 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. The total white finish and the patented technology of the optic system guarantee an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic control gear connected to the luminaire.

### Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 406.

### Colour

White (01)

### Weight (Kg)

0.86

### Mounting

wall recessed/ceiling recessed

### Wiring

On control gear box with quick-coupling connections.

Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	2700	CRI (typical):	92
W system:	33.5	Colour temperature [K]:	4000
lm source:	3600	MacAdam Step:	3
W source:	30	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	80.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	75	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2


### Polar

<p>Imax=3848 cd 90° 180° 90° 4000 0° α = 48°</p>	<b>CIE</b> nL 0.75 88-98-100-100-75 UGR 19.3-19.2 <b>DIN</b> A 61 <b>UTE</b> 0.75A+0.00T F*1=881 F*1+F*2=980 F*1+F*2+F*3=996				<b>Lux</b>			
	h	d	Em	Emax	h	d	Em	Emax
	2	1.8	745	962				
	4	3.6	186	241				
	6	5.3	83	107				
	8	7.1	47	60				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	64	59	56	54	58	56	55	52	70
1.0	67	63	60	58	62	60	59	56	75
1.5	72	69	66	64	68	66	65	62	83
2.0	75	72	70	69	71	70	69	66	88
2.5	76	74	73	72	73	72	71	69	92
3.0	77	76	75	74	75	74	73	71	94
4.0	79	77	77	76	76	75	74	72	96
5.0	79	78	78	77	77	76	75	73	97

# Luminance curve limit

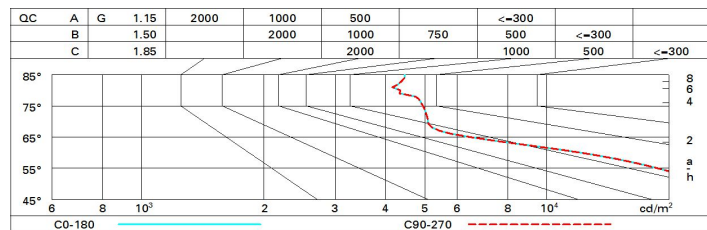

# UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	19.2	19.9	19.5	20.1	20.3	19.2	19.9	19.5	20.1	20.3
	3H	19.2	19.8	19.5	20.1	20.4	19.2	19.8	19.5	20.1	20.4
	4H	19.2	19.8	19.5	20.1	20.4	19.2	19.7	19.5	20.0	20.3
	6H	19.2	19.7	19.6	20.0	20.4	19.1	19.6	19.5	20.0	20.3
	8H	19.2	19.7	19.6	20.0	20.4	19.1	19.6	19.4	19.9	20.3
	12H	19.2	19.7	19.6	20.0	20.4	19.0	19.5	19.4	19.9	20.2
4H	2H	19.2	19.7	19.5	20.0	20.3	19.2	19.8	19.5	20.1	20.4
	3H	19.2	19.7	19.6	20.1	20.4	19.3	19.8	19.7	20.1	20.5
	4H	19.3	19.7	19.7	20.1	20.5	19.3	19.7	19.7	20.1	20.5
	6H	19.3	19.7	19.8	20.1	20.5	19.3	19.6	19.7	20.0	20.4
	8H	19.3	19.7	19.8	20.1	20.5	19.2	19.6	19.7	20.0	20.4
	12H	19.3	19.6	19.8	20.1	20.5	19.2	19.5	19.6	19.9	20.4
8H	4H	19.2	19.6	19.7	20.0	20.4	19.3	19.7	19.8	20.1	20.5
	6H	19.3	19.6	19.8	20.0	20.5	19.3	19.6	19.8	20.1	20.5
	8H	19.3	19.6	19.8	20.0	20.5	19.3	19.6	19.8	20.0	20.5
	12H	19.4	19.6	19.9	20.1	20.6	19.3	19.5	19.8	20.0	20.5
12H	4H	19.2	19.5	19.6	19.9	20.4	19.3	19.6	19.8	20.1	20.5
	6H	19.3	19.5	19.8	20.0	20.5	19.4	19.6	19.8	20.1	20.6
	8H	19.3	19.5	19.8	20.0	20.5	19.4	19.6	19.9	20.1	20.6
Variations with the observer position at spacing:											
S =	1.0H	1.4 / -1.5					1.4 / -1.5				
	1.5H	3.1 / -3.7					3.1 / -3.7				
	2.0H	4.8 / -4.9					4.8 / -4.9				