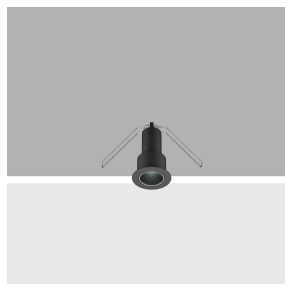


Last information update: November 2024

Product configuration: R662.43

R662.43: Fixed round mini-recessed luminaire - LED - medium - Black / Black

**Product code**

R662.43: Fixed round mini-recessed luminaire - LED - medium - Black / Black

Technical description

Fixed round mini-recessed luminaire with contact frame. The LED is set back to minimize direct glare. The recessed body is made of machined aluminium and the inside of the ring of thermoplastic available in a range of painted and metallised finishes. PMMA - medium high resolution optic lens. LED 4000K. Tool free assembly. Power unit available with a separate code no.

Installation

Recessed in a false ceiling by means of a steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 25 mm.

Colour

Black / Black (43)

Weight (Kg)

0.03

Mounting

wall recessed/ceiling recessed

Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable

Notes

The 25° optic is not available for the finishes: E4 (white - chrome) - 41 (white - gold) - E9 (white - satin finish gold) - E7 (white - burnished chrome)


Complies with EN60598-1 and pertinent regulations



IP20

IP43

On the visible part of the product once installed

**Technical data**

lm system:	140	CRI (minimum):	90
W system:	2	Colour temperature [K]:	4000
lm source:	230	MacAdam Step:	2
W source:	2	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	70.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1
Beam angle [°]:	22°	LED current [mA]:	700


Polar

Imax=989 cd		CIE		Lux			
90°	180°	nL 0.61	100-100-100-100-61	h	d	Em	Emax
		UGR <10-10	DIN	1	0.4	774	989
		A.61	UTE	2	0.8	194	247
		0.61A+0.00T	F*1=999	3	1.1	86	110
		F*1+F*2=999	F*1+F*2+F*3=1000	4	1.5	48	62
		CIBSE	LG3 L<3000 cd/m² at 65°				
		UGR<10 L<3000 cd/mq @65°					
α=21°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	55	52	50	49	52	50	50	48	78
1.0	58	55	53	52	54	53	52	51	83
1.5	60	58	57	56	58	56	56	54	89
2.0	62	61	60	59	60	59	58	57	93
2.5	63	62	61	61	61	61	60	58	96
3.0	64	63	63	62	62	62	61	60	98
4.0	65	64	64	64	63	63	62	61	99
5.0	65	65	65	64	64	64	63	61	100

Luminance curve limit

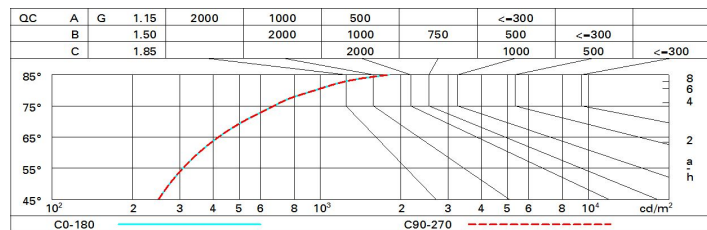

UGR diagram

Corrected UGR values (at 230 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	-12.5	-10.4	-12.2	-10.1	-9.7	-12.5	-10.4	-12.2	-10.1	-9.7
	3H	-9.7	-8.1	-9.3	-7.8	-7.5	-11.9	-10.4	-11.5	-10.0	-9.7
	4H	-7.9	-6.7	-7.5	-6.4	-6.0	-11.5	-10.3	-11.1	-10.0	-9.6
	6H	-5.9	-5.1	-5.6	-4.8	-4.5	-11.1	-10.3	-10.7	-10.0	-9.6
	8H	-4.9	-4.1	-4.6	-3.8	-3.4	-10.9	-10.1	-10.6	-9.8	-9.4
	12H	-3.8	-3.0	-3.4	-2.6	-2.2	-10.9	-10.0	-10.5	-9.7	-9.3
4H	2H	-11.5	-10.3	-11.1	-10.0	-9.6	-7.9	-6.7	-7.5	-6.4	-6.0
	3H	-8.3	-7.4	-7.9	-7.1	-6.7	-6.9	-6.1	-6.5	-5.7	-5.4
	4H	-6.5	-5.5	-6.0	-5.1	-4.7	-6.5	-5.5	-6.0	-5.1	-4.7
	6H	-4.7	-3.0	-4.2	-2.5	-2.1	-6.2	-4.5	-5.7	-4.1	-3.6
	8H	-3.7	-1.8	-3.2	-1.3	-0.8	-6.1	-4.1	-5.6	-3.7	-3.2
	12H	-2.5	-0.5	-2.0	-0.0	0.5	-5.9	-3.9	-5.4	-3.4	-2.9
8H	4H	-6.1	-4.1	-5.6	-3.7	-3.2	-3.7	-1.8	-3.2	-1.3	-0.8
	6H	-3.8	-2.0	-3.2	-1.5	-1.0	-2.9	-1.2	-2.4	-0.7	-0.1
	8H	-2.4	-0.9	-1.9	-0.5	0.1	-2.4	-0.9	-1.9	-0.5	0.1
	12H	-0.8	0.2	-0.3	0.7	1.3	-1.9	-0.8	-1.4	-0.3	0.2
12H	4H	-5.9	-3.9	-5.4	-3.4	-2.9	-2.5	-0.5	-2.0	-0.0	0.5
	6H	-3.4	-1.9	-2.9	-1.4	-0.9	-1.5	-0.0	-1.0	0.5	1.0
	8H	-1.9	-0.8	-1.4	-0.3	0.2	-0.8	0.2	-0.3	0.7	1.3
Variations with the observer position at spacing:											
S =		0.1 / -0.2					0.1 / -0.2				
		0.2 / -0.3					0.2 / -0.3				
		0.3 / -0.4					0.3 / -0.4				