

## Laser Blade


Design iGuzzini

iGuzzini

Last information update: February 2025

### Product configuration: RB58.04

RB58.04: Minimal 10 cells - Spot - LED - Black



### Product code

RB58.04: Minimal 10 cells - Spot - LED - Black

### Technical description

Linear miniaturised recessed luminaire with 10 optical elements for LED lamps - fixed optic. Die-cast aluminium body, minimal version (frameless) installed flush with ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised thermoplastic high definition OptiBeam reflector, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with a dimmable DALI power supply unit connected to the luminaire.

### Installation

The recess body is inserted in the specific adapter installed previously by means of a steel wire spring - check the thickness of the false ceiling and use a compatible frame available with a separate item code.

### Colour

Black (04)

### Weight (Kg)

0.55

### Mounting

wall recessed|ceiling recessed

### Wiring

Quick-coupling connections on the ballast unit.


Complies with EN60598-1 and pertinent regulations



IP20

IP23

On the visible part of the product once installed




33x270

### Technical data

Im system:	1886	CRI (typical):	92
W system:	22.9	Colour temperature [K]:	3500
Im source:	2300	MacAdam Step:	3
W source:	20	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	82.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	1
Beam angle [°]:	14°	Control:	DALI-2
CRI (minimum):	90		

### Polar

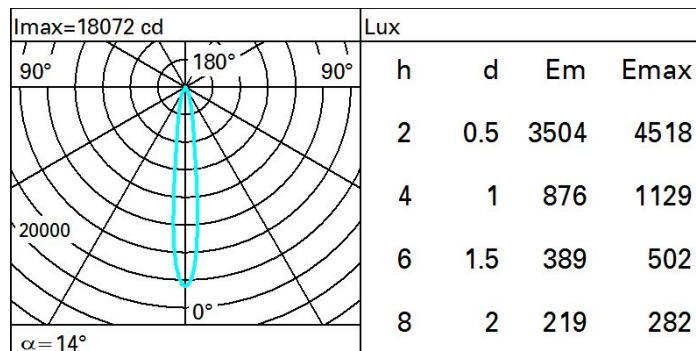

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	66	70	67	67	64	78
1.0	77	74	72	70	73	71	71	68	83
1.5	81	79	77	75	78	76	75	73	89
2.0	84	82	80	79	81	79	78	76	93
2.5	85	84	83	82	83	82	81	79	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	82	99
5.0	88	87	87	87	86	85	84	82	100

---