

Easy Space Square


Design iGuzzini

iGuzzini

Last information update: February 2025

Product configuration: RI73.83

RI73.83: Square 163 - UGR < 19 - DALI - Warm White - Transparent/Black



153x153

Product code

RI73.83: Square 163 - UGR < 19 - DALI - Warm White - Transparent/Black

Technical description

Square recess luminaire with fixed optics, in version with outer frame. High efficiency LED source with high colour rendering index. Controlled luminance emission $L < 3000 \text{ cd/sm}$ - $UGR < 19$ - ideal for environments with video screen use. Emission unit integrated into the polycarbonate external structure - made up of PMMA prismatic reflector in combination with flow recovery unit and transparent PMMA flat screen combined with the PET film with satin finish. The painted die-cast aluminium diffuser encompasses the steel wire coupling springs. A DALI dimmer power supply unit connected to the luminaire.

Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick

Colour

Black Transparent (83)

Weight (Kg)

0.71

Mounting

ceiling surface

Wiring

DALI dimmer functioning components included - power supply connection on the terminals with rapid connection of the driver.

Notes

TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of the product once installed



pending

Technical data

Im system:	1135	Colour temperature [K]:	3000
W system:	10.3	MacAdam Step:	2
Im source:	1320	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	8.6	Lamp code:	LED
Luminous efficiency (Im/W, real value):	110.2	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	86	Control:	DALI-2
CRI (minimum):	90		


Polar

Imax=1185 cd		C0-180		CIE		Lux				
90°	180°	90°	0°	nL 0.86		h	d1	d2	Em	Emax
				87-98-99-100-86		1	1.2	1.2	846	1185
				UGR 15.2-14.9		2	2.3	2.3	212	296
				DIN A.61		3	3.5	3.5	94	132
				UTE 0.86A+0.00T		4	4.6	4.6	53	74
				F*1=875						
				F*1+F*2=981						
				F*1+F*2+F*3=993						
				CIBSE LG3 L<3000 cd/m² at 65°						
				UGR<16 L<3000 cd/mq @65°						
α=60°										

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	67	64	61	67	63	63	59	69
1.0	77	72	69	66	71	68	68	64	75
1.5	82	79	76	74	78	75	74	71	83
2.0	85	83	81	79	81	80	79	76	88
2.5	87	85	84	82	84	82	81	79	91
3.0	89	87	86	84	85	84	83	81	94
4.0	90	89	88	87	87	86	85	82	96
5.0	91	90	89	88	88	87	86	83	97

Luminance curve limit

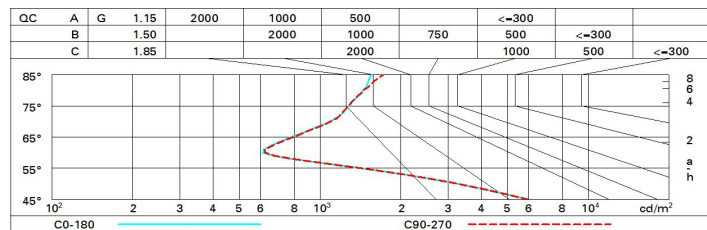

UGR diagram

Corrected UGR values (at 1320 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	15.1	15.8	15.4	16.1	16.3	15.1	15.9	15.4	16.1	16.3
	3H	15.0	15.7	15.3	16.0	16.3	15.0	15.7	15.3	16.0	16.2
	4H	15.1	15.7	15.4	16.0	16.3	14.9	15.6	15.3	15.9	16.2
	6H	15.1	15.7	15.5	16.0	16.4	14.8	15.4	15.2	15.8	16.1
	8H	15.2	15.7	15.5	16.1	16.4	14.8	15.4	15.2	15.7	16.1
	12H	15.2	15.7	15.6	16.1	16.4	14.8	15.3	15.2	15.7	16.0
4H	2H	14.9	15.5	15.2	15.8	16.1	15.1	15.7	15.4	16.0	16.3
	3H	14.9	15.4	15.3	15.8	16.1	15.0	15.6	15.4	15.9	16.3
	4H	15.0	15.4	15.4	15.8	16.2	15.0	15.5	15.4	15.8	16.2
	6H	15.1	15.5	15.5	15.9	16.3	14.9	15.4	15.4	15.8	16.2
	8H	15.2	15.6	15.6	16.0	16.4	14.9	15.3	15.4	15.7	16.2
	12H	15.3	15.6	15.7	16.1	16.5	14.9	15.2	15.3	15.7	16.1
8H	4H	14.9	15.3	15.3	15.7	16.1	15.2	15.6	15.7	16.0	16.5
	6H	15.1	15.4	15.6	15.9	16.4	15.3	15.6	15.7	16.0	16.5
	8H	15.3	15.5	15.7	16.0	16.5	15.3	15.6	15.8	16.0	16.5
	12H	15.4	15.6	15.9	16.1	16.7	15.3	15.5	15.8	16.0	16.5
12H	4H	14.9	15.2	15.3	15.6	16.1	15.3	15.7	15.8	16.1	16.6
	6H	15.1	15.4	15.6	15.8	16.3	15.4	15.7	15.9	16.1	16.6
	8H	15.3	15.5	15.8	16.0	16.5	15.5	15.7	16.0	16.2	16.7
Variations with the observer position at spacing:											
S =	1.0H	2.7 / -3.7					2.7 / -3.6				
	1.5H	4.6 / -4.4					4.6 / -4.3				
	2.0H	6.5 / -4.5					6.4 / -4.4				