

Last information update: March 2025

Product configuration: N479

N479: Spotlight with bracket - Warm White LED - Integrated Ballast - Wall Washer optic - Ta 25°

**Product code**

N479: Spotlight with bracket - Warm White LED - Integrated Ballast - Wall Washer optic - Ta 25°

Technical description

Spotlight designed to use LED lamps and a Wall Washer optic. Consists of a die-cast aluminium optical assembly, bracket and box for the ballast with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Warm White monochrome LED circuit. The electronic DALI ballast is integrated in the product and compatible with remote management systems. Compatible with programming systems via DALI terminals or an NFC system. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Installation

Floor, ceiling or wall-mounted installation.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

9.35

Wiring


Double PG.

Complies with EN60598-1 and pertinent regulations




IK08

IP66

**Technical data**

Im system:	6107	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W system:	71.7	Lamp code:	LED
Im source:	9850	Number of lamps for optical assembly:	1
W source:	65	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	85.2	Number of optical assemblies:	1
Im in emergency mode:	-	Intervallo temperatura ambiente:	from -30°C to 35°C.
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	62	Inrush current:	43 A / 260 µs
CRI (minimum):	80	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 6 luminaires B16A: 10 luminaires C10A: 10 luminaires C16A: 17 luminaires
Colour temperature [K]:	3000	Overvoltage protection:	10kV Common mode & 6kV Differential mode
MacAdam Step:	3	Control:	DALI-2

Polar

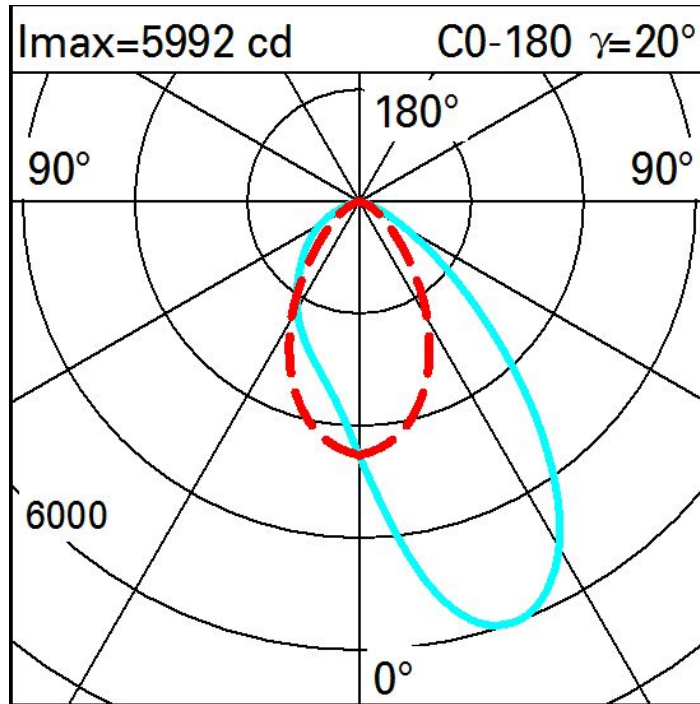

Illuminances

Lux Wall distance = 1m

3											
	0.6	3	12	40	90	114	83	32	8	2	0.4
2	9	23	55	119	203	266	248	135	52	19	7
	18	36	69	124	192	256	301	217	103	42	18
1	22	36	61	99	143	196	248	212	124	63	31
	20	33	51	74	98	132	170	168	124	75	39
0											
	m	-2	-1	0	1	2	3				