


Last information update: April 2024

Product configuration: N388

N388: extractable, adjustable, recessed LED luminaire - electronic control gear included

**Product code**N388: extractable, adjustable, recessed LED luminaire - electronic control gear included **Attention! Code no longer in production****Technical description**

Extractable, adjustable, recessed luminaire for neutral white LED lamp. Passive heat dispersion system. Die-cast aluminium main body and frame; stainless steel rotation hinge. Rotation ring with safety cover in a high resistance thermoplastic material. Body adjusted with a manual manoeuvre device: internal 40° - external 65° - rotation on 355° axis. Reflector with high efficiency super-pure aluminium optic - flood beam angle. Die-cast aluminium lamp body closure ring. Tempered transparent glass screen. Electronic control gear supplied and connected to the luminaire.

Installation

recessed using steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 195 mm

Colour

White (01)

Weight (Kg)

1.7

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	4096	CRI (minimum):	80
W system:	35.8	Colour temperature [K]:	4000
lm source:	5000	MacAdam Step:	2
W source:	31	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	114.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	1
Beam angle [°]:	36°		


Polar

<p>Imax=9436 cd 90° 180° 90° 10500 0° α=36°</p>	CIE nL 0.82 99-100-100-100-82 UGR 16.3-16.3 DIN A 61 UTE 0.82A+0.00T F*1=985 F*1+F*2=997 F*1+F*2+F*3=1000 CIBSE LG3 L<3000 cd/m² at 65° UGR<19 L<3000 cd/mq @ 65°				Lux h d Em Emax 2 1.3 1837 2359 4 2.6 459 590 6 3.9 204 262 8 5.2 115 147			

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	66	66	63	77
1.0	77	73	71	69	72	70	70	67	82
1.5	81	78	76	74	77	75	75	72	88
2.0	83	81	80	78	80	79	78	76	92
2.5	85	83	82	81	82	81	80	78	95
3.0	86	85	84	83	84	83	82	80	97
4.0	87	86	86	85	85	84	83	81	99
5.0	87	87	86	86	86	85	84	82	100

Luminance curve limit

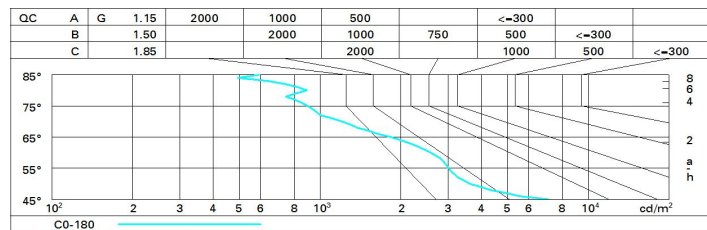

UGR diagram

Corrected UGR values (at 5000 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	16.9	17.5	17.1	17.7	17.9	16.9	17.5	17.1	17.7	17.9
	3H	16.7	17.3	17.0	17.6	17.8	16.7	17.3	17.0	17.5	17.8
	4H	16.7	17.2	17.0	17.5	17.8	16.7	17.2	17.0	17.5	17.8
	6H	16.6	17.1	16.9	17.4	17.7	16.6	17.1	16.9	17.4	17.7
	8H	16.6	17.0	16.9	17.3	17.7	16.5	17.0	16.9	17.3	17.7
	12H	16.5	17.0	16.9	17.3	17.6	16.5	16.9	16.9	17.3	17.6
4H	2H	16.7	17.2	17.0	17.5	17.8	16.7	17.2	17.0	17.5	17.8
	3H	16.5	17.0	16.9	17.3	17.6	16.5	17.0	16.9	17.3	17.6
	4H	16.4	16.8	16.8	17.2	17.6	16.4	16.8	16.8	17.2	17.6
	6H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
	8H	16.3	16.6	16.8	17.0	17.5	16.3	16.6	16.7	17.0	17.5
	12H	16.3	16.5	16.7	17.0	17.4	16.3	16.5	16.7	17.0	17.4
8H	4H	16.3	16.6	16.7	17.0	17.5	16.3	16.6	16.8	17.0	17.5
	6H	16.2	16.5	16.7	16.9	17.4	16.2	16.5	16.7	16.9	17.4
	8H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
	12H	16.1	16.3	16.6	16.8	17.3	16.1	16.3	16.6	16.8	17.3
12H	4H	16.3	16.5	16.7	17.0	17.4	16.3	16.5	16.7	17.0	17.4
	6H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
	8H	16.1	16.3	16.6	16.8	17.3	16.1	16.3	16.6	16.8	17.3
Variations with the observer position at spacing:											
S =	1.0H	5.7 / -12.0					5.7 / -12.0				
	1.5H	8.5 / -13.0					8.5 / -13.0				
	2.0H	10.5 / -14.4					10.5 / -14.4				