



Laser Blade XS / Palco
Low Voltage Track

Laser Blade XS "The Blade"

Low Voltage Track

The smallest linear downlight, has evolved even to the point of including a low-voltage track version with a variety of applicational possibilities. From the single adjustable spotlight, to linear modules having different lengths up to pendants with three sizes



Laser Blade XS "The Blade"

Low Voltage Track

High Contrast



1"x 1"
3,5 W / 135 lm / 42°



2 x 1"x 1"
5,5 W / 2 x 135 lm / 42°



1" x 5-5/8"
11,5 W / 660 lm / 42°



1 x 7-1/4"
22 W / 1285 lm / 42°



1"x 1" - h 24"
3,3 W / 135 lm / 42°



1"x 1" - h 12"
3,3 W / 135 lm / 42°



1-3/4" x 1-3/4" / h 12"
9,7 W / 550 lm / 58°



2-1/2" x 2-1/2" / h 12"
16,9 W / 1080 lm / 58°

Wall Washer



1" x 7-1/4"
18,5 W / 530 lm

General Lighting Pro



1" x 5-5/8"
11,5 W / 550 lm




1-1/8" x 7-1/4" mm
22 W / 1065 lm

Info Box


2700K CRI 90 / 3000K CRI 90
3500K CRI 90 / 4000K CRI 90
0-10V

Finishes:

- 01 (White / Black)
- 02 (Black / Black)
- 21 (Black / White)
- 31 (White / White)

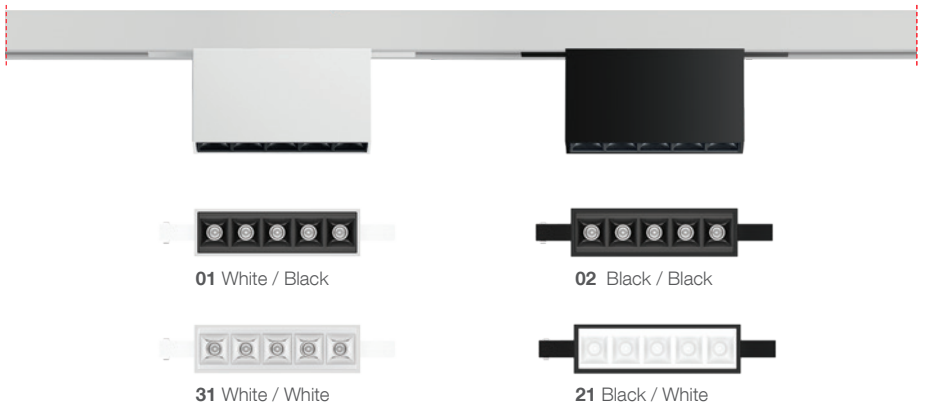

Alignment device




Dual rotation for
1"x1" versions



Continual row 10x

We've miniaturized the form and maintained performance. The optic system is precise and uses patented Opti Beam lenses. Absolute innovation and flexibility.

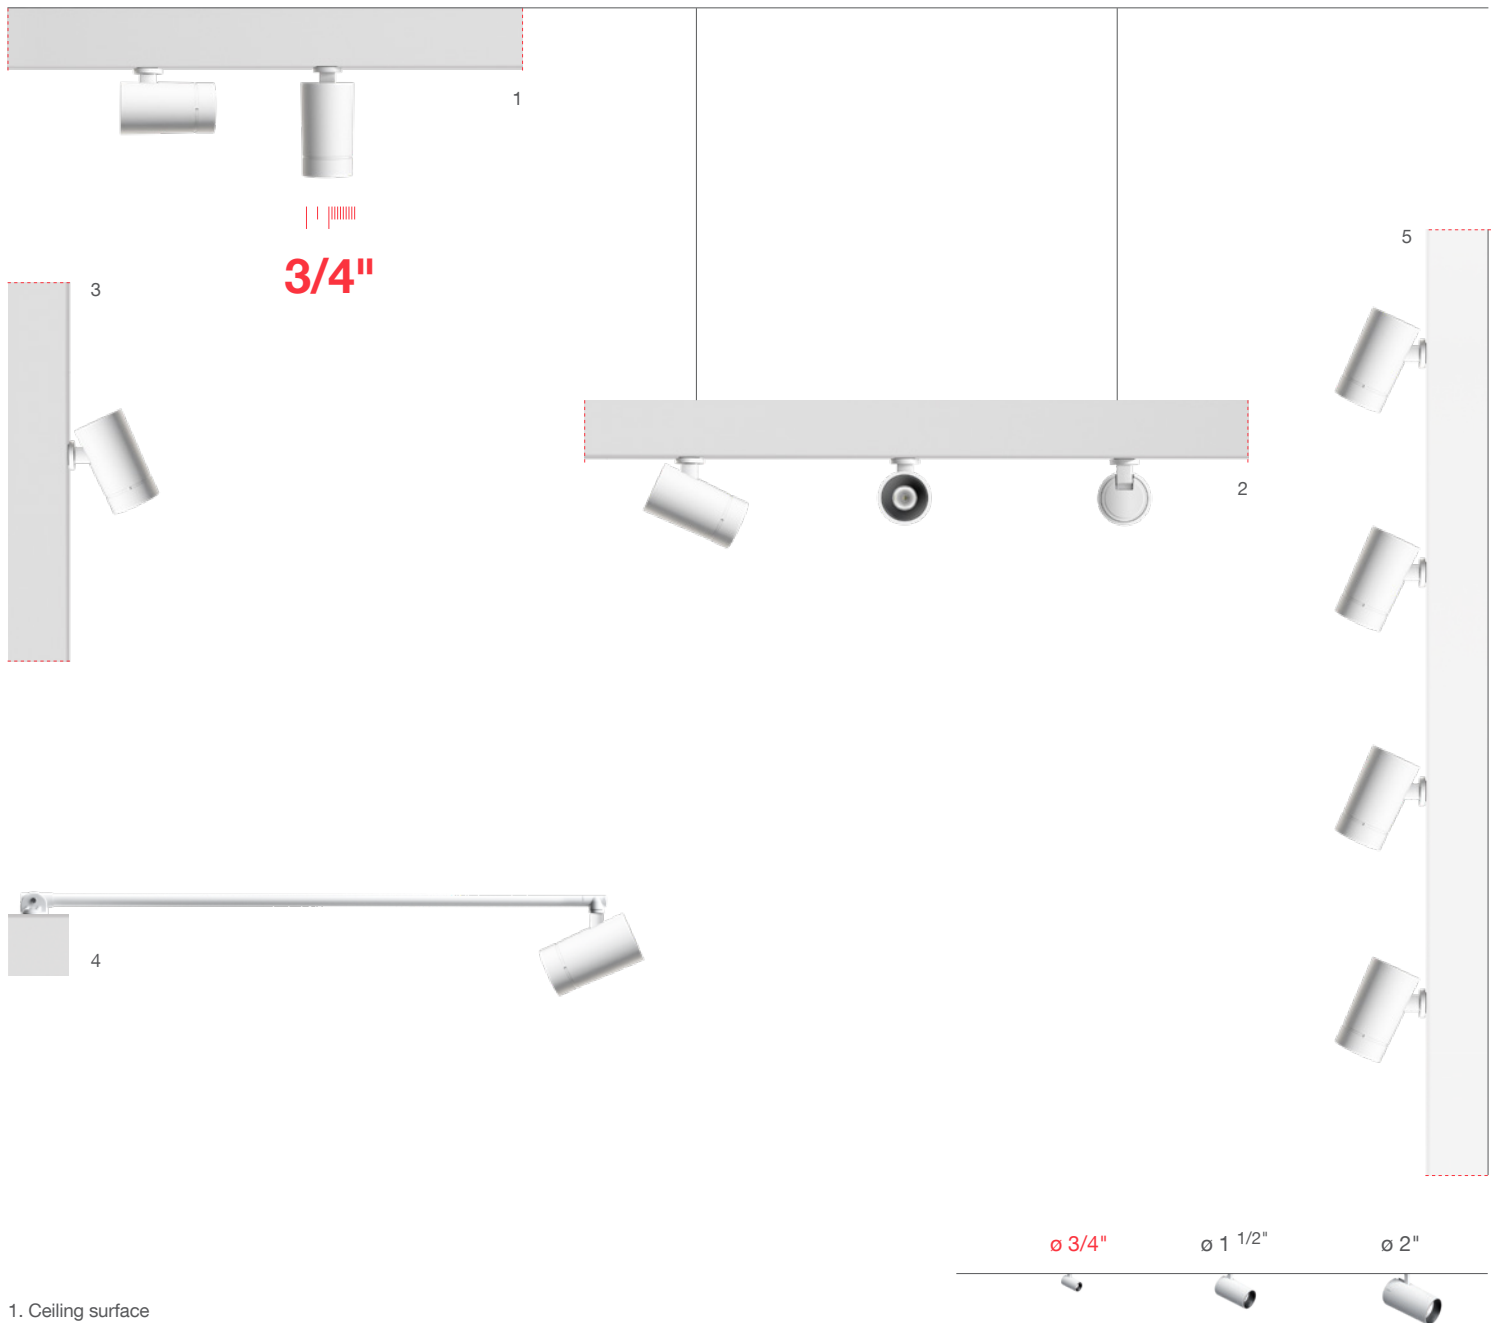

- 1. Ceiling surface
- 2. Pendants
- 3 -5 . Wall surface
- 4. Wall / surface with rod

Palco

Low Voltage Track



* Elliptical optics are obtained by installing the specific accessory.





Info Box

2700K - CRI 90
3000K - CRI 90

≥ 50.000 h L80 B10


0-10V dimmable

Accessories

-  Refractor for elliptical distribution
-  Honeycomb louvre
-  Cylindrical screen (Shoot)
-  Spill Ring



Only for ø 1 1/2" mm and ø 2" mm.

Spacing

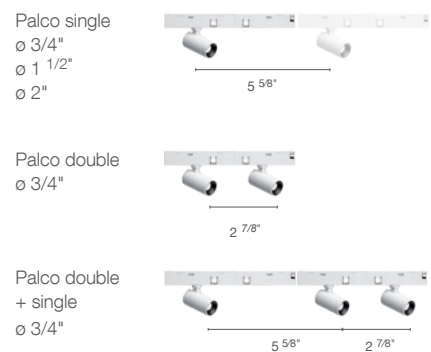

Low Voltage Track



Ceiling / Pendant

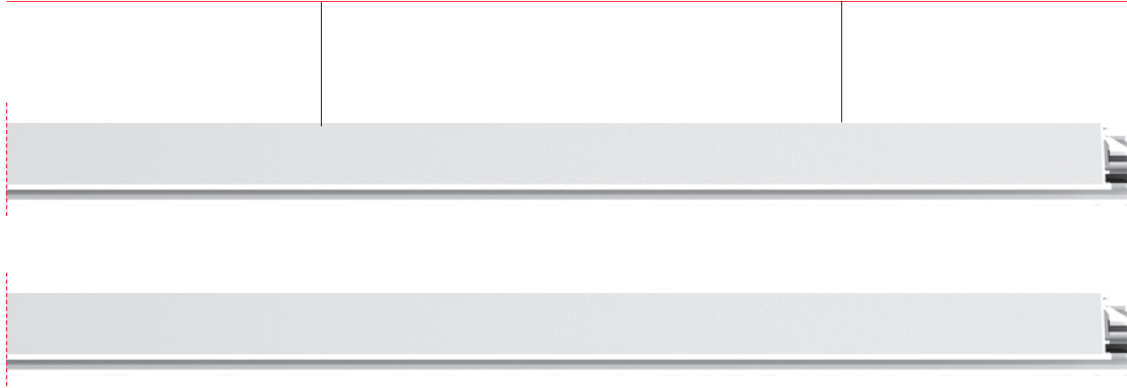

Applications

The articulated joint is used to change direction between two consecutive tracks even at angles other than 90°


Angle joint also available with possibility of power supply

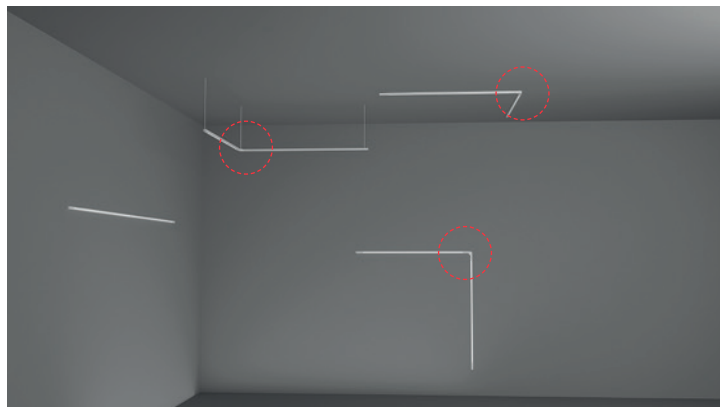

L : 1'-7⁵/₈" (500mm)



L : 3'-3³/₈" (1000mm)



L : 6'-6³/₄" (2000mm)



L : 9'-10¹/₈" (3000mm)

