


Última actualización de la información: Octubre 2024

**Configuraciones productos: BY38**

BY38: Mini - Wall-/Ceiling-mounted - Warm White LED - 24V/500mA dc - L=528mm - 32° Flood Optic

**Código producto**

BY38: Mini - Wall-/Ceiling-mounted - Warm White LED - 24V/500mA dc - L=528mm - 32° Flood Optic

**Descripción**

Direct light luminaire, designed to use monochrome LED lamps. Ceiling- and wall-mounted. Consists of a body and supports for installation (to be ordered separately). Extruded aluminium body, with zamak die-cast end caps complete with silicone gaskets. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED power plate in Warm White with 24V/500mA dc electronic circuit (power supply to be ordered separately); 24V/500mA smart driver allowing constant light flow emission despite variations in the input voltage (from 30V dc to 16V dc). Fitted with satin-finish polycarbonate film and optics with plastic (methacrylate) lens for 32° FLOOD lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Instalación**

The following accessories are available for installation: adjustable wall-mounted arms in AISI304 stainless steel (L=83mm code BZJ9, 200mm code BZJ8) and a plate for surface- or ceiling-mounting made of anodised aluminium (BZJ6).

**Colores**

Gris (15)

**Peso (Kg)**

0.89

**Montaje**

a la pared/en el techo

**Equipo**

The product is supplied with a single nickel-plated brass cable gland PG9 and a 2x1mm<sup>2</sup> PVC and polyurethane outlet cable, 2000mm long. For the electrical connection there is an IP68 linear connector (BZK6) and an IP67 junction box with quick-coupling terminals (BZK7). 24V/500mA dc electronic ballasts to be ordered separately: 32W (BZA0), 25W (K980) and 35W (BZM4)

**Notas**


Product complete with LED lamp

Se conforma con EN60598-1 y regulaciones pertinentes

**Datos técnicos**

Im de sistema:	750	MacAdam Step:	3
W de sistema:	18	Life time (vida útil) LED 1:	65,000h - L80 - B10 (Ta 25°C)
Im de la fuente:	1250	Life time (vida útil) LED 2:	65,000h - L80 - B10 (Ta 40°C)
W de la fuente:	18	Voltaje [Vin]:	36
Eficiencia luminosa (lm/W, valor del sistema):	41.7	Código de lámpara:	LED
Im en modo emergencia:	-	Número de lámparas por grupo óptico:	1
Flujo total de emisión en un ángulo de 90° o superior [Lm]:	0	Código ZVEI:	LED
Light Output Ratio (L.O.R.) [%]:	60	Número de grupos ópticos:	1
Ángulo de apertura del haz de luz [°]:	34°	Rango de temperatura ambiente operativa:	de -30°C a 50°C.
CRI (mínimo):	80	Corriente LED [mA]:	500
Temperatura de color [K]:	2700		

Polar

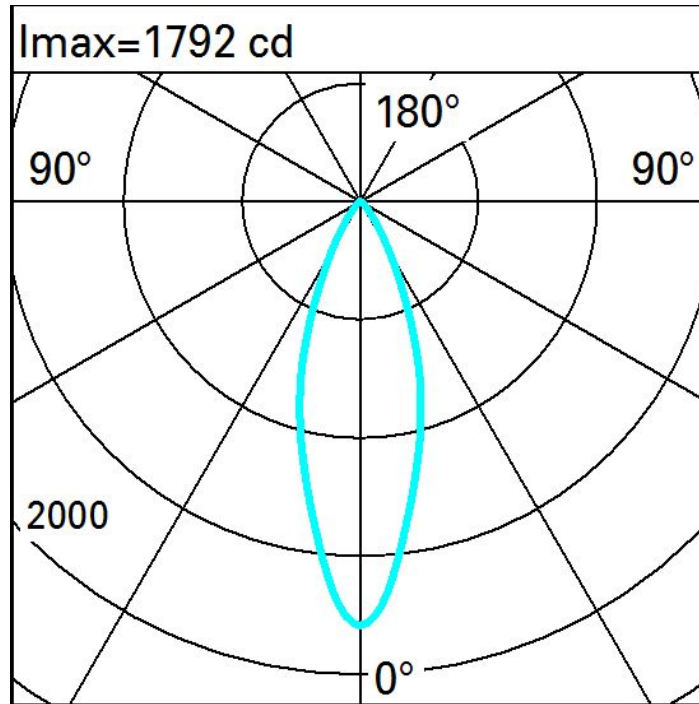

Iluminaciones

Lux		Wall distance = 1m												
3														
		0.1	0.4	1	3	5	3	1	0.4	0.1				
2		0.2	0.4	1.0	3	7	11	7	3	1.0	0.4	0.2		
		0.3	0.6	2	5	14	24	14	5	2	0.6	0.3		
1		0.4	0.9	3	8	21	33	21	8	3	0.9	0.4		
		0.6	1	4	11	22	32	22	11	4	1	0.6		
0														
	m	-2	-1	0	1	2	3							