



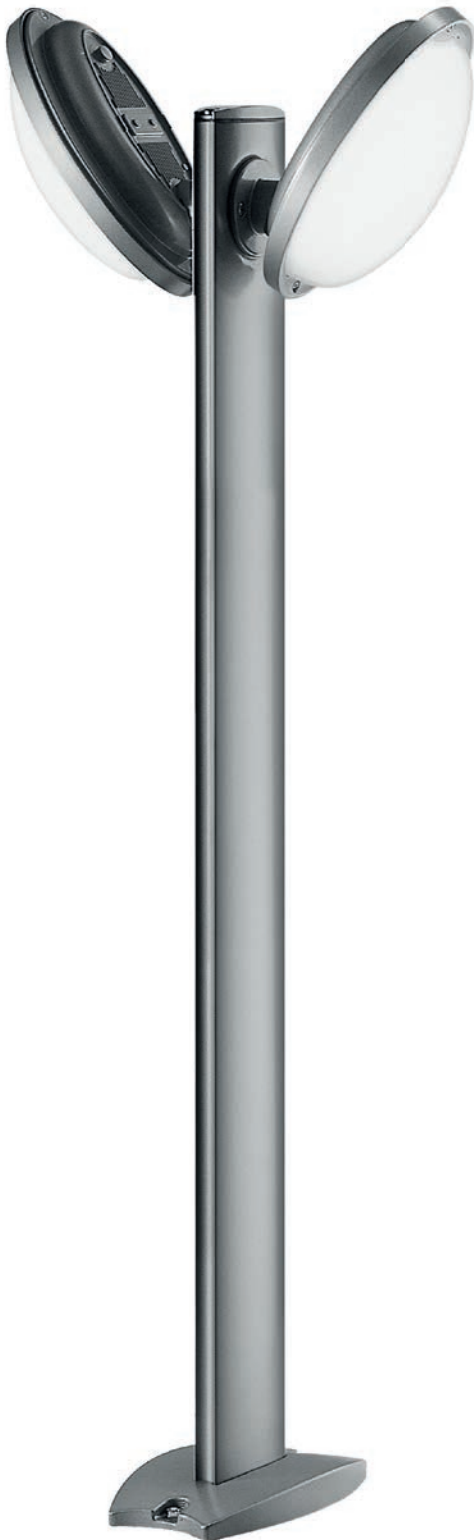

- Diffused light luminaire for use with halogen, fluorescent lamps and LEDs.
- Pole, wall/ceiling installation.
- External die-cast aluminium frame; pressure-moulded glass diffuser (model with polycarbonate screen for LEDs lamps and with E27 fitting). Aluminium reflector.
- Extruded aluminium pole.
- All screws are A2 stainless steel.
- IK08 (IP55 LED versions).



Uniform illumination

The diffuser screen guarantees uniform lighting and excellent visual comfort.



Versions



Ceiling-mount-
ed luminaire



Wall-mounted
luminaire




01
WHITE



15
GREY



74
GREY/
BLACK

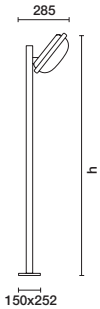

W lm h code colour

H1100 - Pole complete with luminaire

LED

4000K - CRI 80

8,7W 820 1100 BH54 15

3000K - CRI 80


8,7W 750 1100 BH55 15

A 60 (E27) - TC-TSE (E27)

60W (A 60) 1100 7576 15

23W (TC-TSE)

7576: IP54

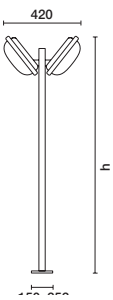

W lm h code colour

H1100 - Pole complete with two luminaires

LED

4000K - CRI 80

17,4W 1640 1100 BH56 15

3000K - CRI 80


17,4W 1500 1100 BH57 15

A 60 (E27) - TC-TSE (E27)

2x60W (A 60) 1100 7582 15

2x23W (TC-TSE)

7582: IP54



W lm h code colour

Ceiling-mounted luminaire

LED

4000K - CRI 80

4,3W 410 225 7033 01-74

8,7W 820 275 7038 01-74

3000K - CRI 80

4,3W 375 225 7036 01-74

8,7W 750 275 7039 01-74

A 60 (E27) - TC-TSE (E27)

60W (A 60) 225 7113 01-74

14W (TC-TSE)

60W (A 60) 275 7116 01-74

23W (TC-TSE)

7113, 7116: IP54



W lm code colour

Wall-mounted luminaire

LED

4000K - CRI 80

8,7W 820 BH52 15

3000K - CRI 80

8,7W 750 BH53 15

A 60 (E27) - TC-TSE (E27)

60W (A 60) 7588 15

23W (TC-TSE)

7588: IP54

accessories

	code	colour
251x150   L=160 ø 16	0455	00 for 7576-7578-7582-7584 BH54-BH55-BH56-BH57