

Reflex

Design iGuzzini


iGuzzini

Last information update: May 2024

Product configuration: N062.Y+PA58.01

N062.Y: adjustable luminaire - Ø 153 mm - warm white - medium optic - minimal

PA58.01: Minimal flange - White

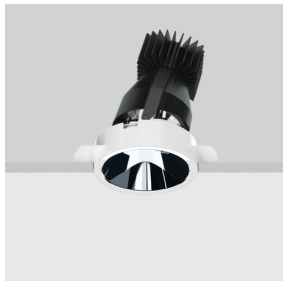

Product code

N062.Y: adjustable luminaire - Ø 153 mm - warm white - medium optic - minimal **Attention! Code no longer in production**

Technical description

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a warm white colour tone 3000K (CRI 90). Version without rim for mounting flush with ceiling. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

Installation

Installation flush with the ceiling is for false ceilings 12.5 mm thick

Colour

Aluminium (12)

Weight (Kg)

1.43

Mounting

ceiling recessed

Wiring


Product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP23



Accessory code

PA58.01: Minimal flange - White **Attention! Code no longer in production**

Technical description

Adapter for plasterboard false ceilings and rapid flush with ceiling installations, specifically for adjustable Reflex recessed luminaires. Made of plastic with a border for limiting plaster and holes for installation with screws and anchors suitable for plasterboard (included). Fastening the adapter to the installation surface does not require predefined panel thicknesses.

Installation

Preparation hole Ø 152 mm. Fastening the perforated perimeter rim to the installation surface (fixing screws included) - subsequent operations including filling, smoothing to the reference border and finishing - final insertion of the recessed luminaire (separate code) in the adapter.

Colour

White (01)

Weight (Kg)

0.06

Mounting

ceiling recessed

Complies with EN60598-1 and pertinent regulations




Technical data

Im system:	2087
W system:	36.3
Im source:	3550
W source:	33
Luminous efficiency (Im/W, real value):	57.5
Im in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	59
Beam angle [°]:	24°

CRI (minimum):	90
Colour temperature [K]:	3000
MacAdam Step:	2
Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1
Control:	DALI


Polar

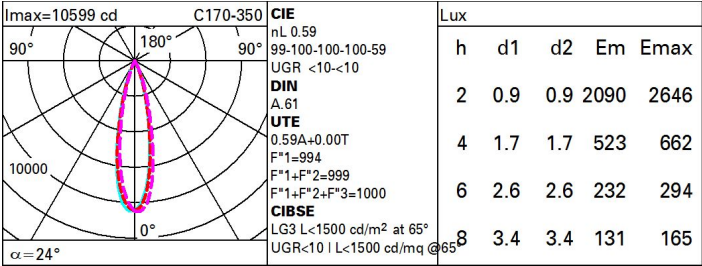

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	53	50	48	47	50	48	48	46	78
1.0	55	53	51	50	52	51	50	49	83
1.5	58	56	55	54	56	54	54	52	88
2.0	60	59	57	57	58	57	56	55	93
2.5	61	60	59	59	59	58	58	56	96
3.0	62	61	60	60	60	60	59	57	98
4.0	62	62	62	61	61	61	60	58	99
5.0	63	62	62	62	62	61	60	59	100

Luminance curve limit

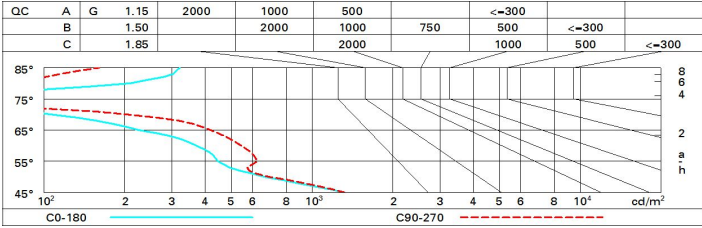

UGR diagram

Corrected UGR values (at 3550 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	-2.3	-0.2	-1.9	0.2	0.5	0.1	2.2	0.4	2.5	2.9	
	3H	-2.4	-0.8	-2.0	-0.5	-0.1	-0.0	1.6	0.4	1.9	2.3	
	4H	-2.5	-1.1	-2.1	-0.8	-0.5	-0.0	1.3	0.3	1.6	2.0	
	6H	-2.4	-1.4	-2.0	-1.1	-0.8	-0.1	0.9	0.3	1.2	1.6	
	8H	-2.3	-1.3	-1.9	-0.9	-0.6	-0.1	0.9	0.3	1.2	1.6	
	12H	-2.1	-1.2	-1.7	-0.8	-0.4	-0.2	0.8	0.2	1.2	1.5	
4H	2H	-2.4	-1.1	-2.1	-0.8	-0.4	0.0	1.3	0.4	1.7	2.0	
	3H	-2.5	-1.6	-2.1	-1.2	-0.9	0.0	1.0	0.4	1.3	1.7	
	4H	-2.6	-1.7	-2.2	-1.3	-0.9	-0.1	0.9	0.3	1.2	1.7	
	6H	-2.8	-1.1	-2.3	-0.7	-0.2	-0.5	1.2	0.0	1.7	2.2	
	8H	-2.5	-0.6	-2.0	-0.1	0.4	-0.6	1.3	-0.1	1.8	2.3	
	12H	-2.2	-0.2	-1.7	0.3	0.8	-0.7	1.3	-0.2	1.8	2.3	
8H	4H	-3.2	-1.2	-2.7	-0.8	-0.3	-0.6	1.3	-0.1	1.8	2.3	
	6H	-3.0	-1.2	-2.5	-0.7	-0.1	-0.7	1.1	-0.2	1.6	2.1	
	8H	-2.2	-0.7	-1.7	-0.2	0.4	-0.7	0.9	-0.2	1.4	1.9	
	12H	-1.4	-0.3	-0.9	0.2	0.7	-0.5	0.5	-0.0	1.0	1.6	
12H	4H	-3.3	-1.3	-2.7	-0.8	-0.3	-0.7	1.3	-0.2	1.8	2.3	
	6H	-3.0	-1.4	-2.4	-0.9	-0.3	-0.7	0.9	-0.1	1.4	2.0	
	8H	-2.1	-1.0	-1.5	-0.5	0.1	-0.5	0.6	-0.0	1.1	1.6	
Variations with the observer position at spacing:												
S =	1.0H			2.6	/	-2.5				5.2	/	-4.5
	1.5H			4.9	/	-3.2				7.6	/	-5.0
	2.0H			6.7	/	-3.5				9.6	/	-6.9