

## Twilight

Design iGuzzini

iGuzzini

Last information update: May 2024

### Product configuration: E241

E241: Pole-mounted system for urban and residential parks and gardens.



### Product code

E241: Pole-mounted system for urban and residential parks and gardens. **Attention! Code no longer in production**

### Technical description

Outdoor luminaire with a street optic, designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. Diffuser made of shockproof, UV-stabilised injection moulded polycarbonate. Complete with circuit featuring monochrome LEDs and optics with polymer multilayer lenses. Replaceable driver and LEDs. Electronic DALI driver with automatic internal temperature control system. All external screws are made of stainless steel.

### Installation

The luminaire can be installed with a pole-top mounting on poles with  $\varnothing$  60mm and 76mm end part using X102 and X126 accessories. Secured to the pole by two bolts.

### Colour

Grey (15)

### Weight (Kg)

4.89

### Mounting

pole-top

### Wiring

The product is supplied wired and with an outlet cable 1500mm long.

### Notes

Overvoltage protection: 10KV Common Mode, 6KV Differential Mode

Complies with EN60598-1 and pertinent regulations




### Technical data


Im system:	3660	Colour temperature [K]:	3000
W system:	46	MacAdam Step:	5
Im source:	-	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W source:	-	Lamp code:	LED
Luminous efficiency (Im/W, real value):	79.6	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	100	Intervallo temperatura ambiente:	from -20°C to +35°C. (*)
CRI:	70	Control:	DALI

\* Preliminary data

### Polar

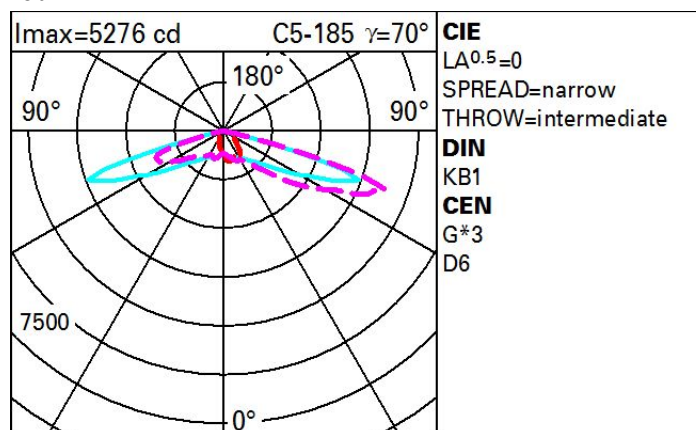

# Isolux

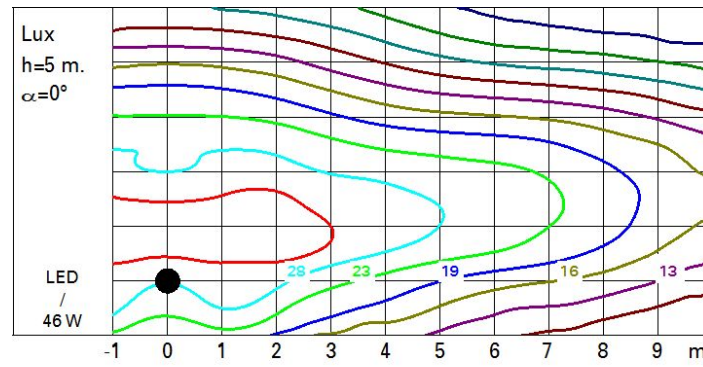

# Utilisation factors

