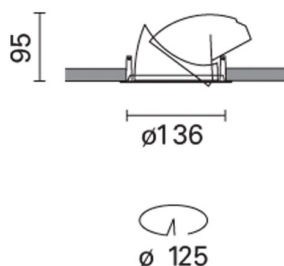


Last information update: April 2024

**Product configuration: 4659+LED**

4659: LED neutral white - spot optic

**Product code**4659: LED neutral white - spot optic **Attention! Code no longer in production****Technical description**

Recessed luminaire with 6 x 2.2W high output LED lamps. Monochrome emission in a neutral white tone. Made of die-cast aluminium and thermoplastic material. LED optic with narrow beam lenses ( $\alpha$  7°) made of plastic material. Double adjustability: internal (40°) and external (65°) with continuous friction; 355° rotation about the horizontal axis. Equipped with electronic power supply. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installation**

Recessed in false ceilings, with thicknesses starting at 1 mm, using special steel torsion springs

**Colour**

White (01) | Grey (15)

**Mounting**

ceiling recessed


**Wiring**

The connection to the power cable is made on the integrated electronic power supply.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	880	CRI:	80
W system:	12.5	Colour temperature [K]:	4000
lm source:	1100	MacAdam Step:	3
W source:	11	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	70.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	10°		

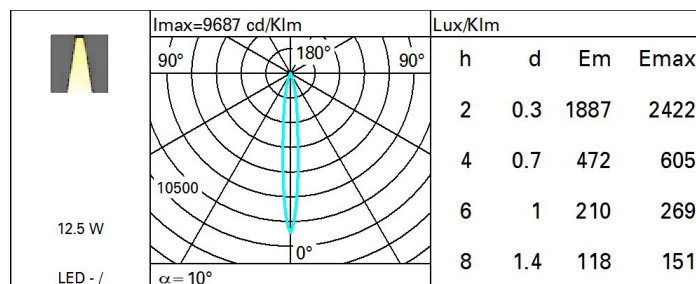**Polar**

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	64	62	67	64	64	61	76
1.0	74	71	68	66	70	68	67	65	81
1.5	78	76	74	72	75	73	72	70	87
2.0	81	79	77	76	78	76	76	73	92
2.5	83	81	80	79	80	79	78	76	95
3.0	84	83	82	81	81	81	79	77	97
4.0	85	84	83	83	83	82	81	79	99
5.0	85	85	84	84	83	83	82	80	100

Luminance curve limit

