

Action



Design Jean Michel Wilmotte

iGuzzini

Last information update: October 2020

Product configuration: 6615+L147

6615: Module wall-washer with electronic control gear T16 35/49/80W



Product code

6615: Module wall-washer with electronic control gear T16 35/49/80W **Attention! Code no longer in production**

Technical description

Suspended, ceiling-mounted or recessed lighting system designed for fluorescent light sources with wall-washer light emission. The wall-washer optic is made up of a superpure aluminium reflector and a painted extruded aluminium lamp cover. The structure of the fitting is made of painted extruded aluminium; the lamp-holding supports are made of galvanised painted sheet steel; and the end caps (to be ordered separately) of polycarbonate. The power-supply cable is transparent and the cables are subjected to antioxidant treatment. The modules can be combined by means of direct and corner 90° couplings as well as structural modules (to be ordered separately). Ideal distance from the wall: 100cm.

Installation

The suspension system (to be ordered separately) has sheet-steel supporting plates with polycarbonate covering bases and steel suspension cables with a millimetric adjustment system (applied to the modules). Ceiling application by means of an aluminium structure (to be ordered separately). Recessed and semi-recessed installation by means of a structure designed for application to false ceilings 12.5mm and 15mm thick, with concealed rim (to be ordered separately).

Colour

White (01) | Grey (15)

Weight (Kg)

4.87

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

The fitting comes complete with an electronic ballast. It is designed for through wiring by means of special terminal boards housed inside the aluminium profile. The system is able to switch on three groups of fittings separately.

Notes

Accessories available: end caps, various installation and combination accessories


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	3722	Colour temperature [K]:	4000
W system:	91	Ballast losses [W]:	11
lm source:	6150	Voltage [Vin]:	230
W source:	80	Lamp code:	L147
Luminous efficiency (lm/W, 40.9 real value):		Socket:	G5
lm in emergency mode:	-	Number of lamps for optical 1 assembly:	
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	T 16
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1
CRI:	86		

Polar

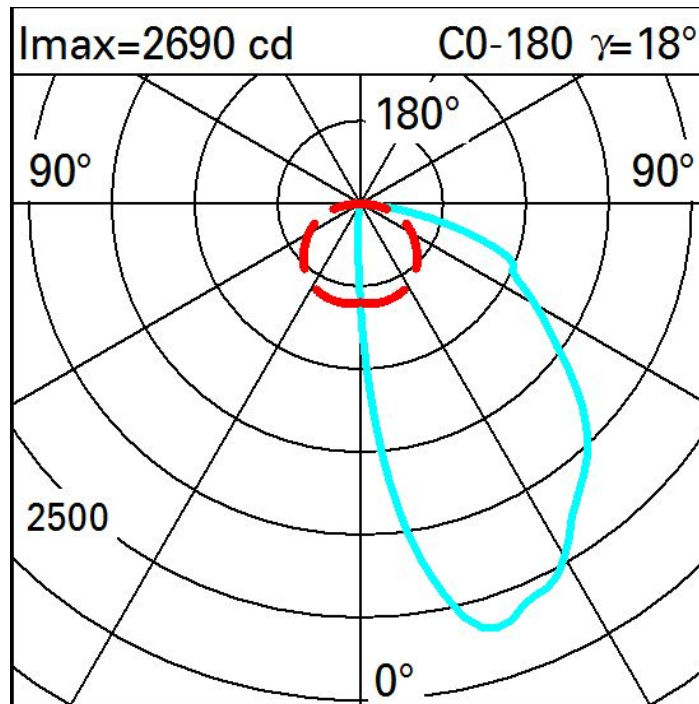

Illuminances

Lux											Wall distance = 1 m	
3	0.2	0.3	0.5	1.0	3	230	506	214	95	35	13	
2	0.1	0.1	0.3	0.6	2	180	525	291	133	65	37	
	0.1	0.1	0.2	0.5	2	101	332	227	134	71	39	
1		0.1	0.1	0.5	3	56	191	160	104	67	40	
			0.2	0.5	2	32	108	105	79	55	37	
0	m	-2	-1	0	1	2	3					