



Last information update: April 2024

Product configuration: P260

P260: Medium body spotlight - warm white - DALI - FLOOD

**Product code**

P260: Medium body spotlight - warm white - DALI - FLOOD

Technical description

Adjustable spotlight with adapter for installation on an electrified DALI track. High yield LED lamp with high color rendering index. Luminaire body made of die-cast aluminium and thermoplastic material. Swivel joints allow the spotlight to be rotated by 360° about the vertical axis and tilted by 90° tilting relative to the horizontal plane. Mechanical aiming locks fitted on both the spotlight and adapter allow rotation and tilting movements to be locked in position to ensure efficient light aiming even after the original installation or during maintenance. The optical assembly is equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied - asymmetric screen / directional flaps; the external accessories can rotate freely about the spotlight longitudinal axis. DALI dimmable power supply unit integrated in the spotlight body.

Installation

Installation on an electrified track.

Colour

White (01) | Grey / Black (74)

Weight (Kg)

0.9

Mounting

dali track

Wiring

Integrated DALI dimmer power supply unit.

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	3665	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	37.5	Lamp code:	LED
Im source:	4470	Number of lamps for optical assembly:	1
W source:	32	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	97.7	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	18 A / 250 µs
Light Output Ratio (L.O.R.) [%]:	82	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
Beam angle [°]:	38°	Minimum dimming %:	1
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	2		

Polar

Imax=7386 cd		Lux			
		h	d	Em	Emax
	90°				
	180°				
	90°				
	0°				
		2	1.4	1498	1839
		4	2.8	375	460
		6	4.2	166	204
		8	5.6	94	115
α = 39°					

Isolux

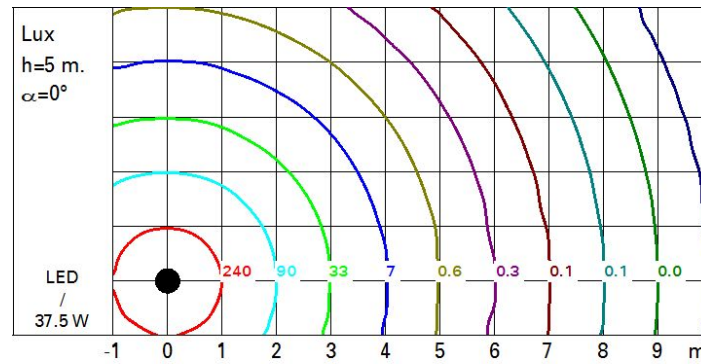

UGR diagram

Corrected UGR values (at 4470 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.3	18.0	17.6	18.2	18.4	17.3	18.0	17.6	18.2	18.4
	3H	17.2	17.8	17.5	18.0	18.3	17.2	17.8	17.5	18.0	18.3
	4H	17.1	17.7	17.5	18.0	18.3	17.1	17.7	17.5	18.0	18.3
	6H	17.1	17.5	17.4	17.9	18.2	17.1	17.5	17.4	17.9	18.2
	8H	17.0	17.5	17.4	17.8	18.2	17.0	17.5	17.4	17.8	18.2
	12H	17.0	17.4	17.4	17.8	18.1	17.0	17.4	17.4	17.8	18.1
4H	2H	17.1	17.7	17.5	18.0	18.3	17.1	17.7	17.5	18.0	18.3
	3H	17.0	17.4	17.4	17.8	18.1	17.0	17.4	17.4	17.8	18.1
	4H	16.9	17.3	17.3	17.7	18.1	16.9	17.3	17.3	17.7	18.1
	6H	16.8	17.2	17.3	17.6	18.0	16.8	17.2	17.3	17.6	18.0
	8H	16.8	17.1	17.2	17.5	17.9	16.8	17.1	17.2	17.5	17.9
	12H	16.7	17.0	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9
8H	4H	16.8	17.1	17.2	17.5	17.9	16.8	17.1	17.2	17.5	17.9
	6H	16.7	16.9	17.2	17.4	17.9	16.7	16.9	17.2	17.4	17.9
	8H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8
	12H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8
12H	4H	16.7	17.0	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9
	6H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8
	8H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8
Variations with the observer position at spacing:											
S =		1.0H	5.6 / -12.9				5.6	-12.9			
		1.5H	8.4 / -15.1				8.4	-15.1			
		2.0H	10.4 / -17.0				10.4	-17.0			