

Screen


Design Mario
Cucinella

iGuzzini

Last information update: February 2023

Product configuration: B566+L129

B566: Ceiling luminaire 26W TC-TEL



Product code

B566: Ceiling luminaire 26W TC-TEL **Attention! Code no longer in production**

Technical description

Wall and ceiling luminaire for public residential areas using 26W TC-TEL compact fluorescent lamps. The body and the frame are made of die-cast aluminium. Complete with protection screen of the diffuser in textured glass with internal paint finish. Polycarbonate component-holding box with polycarbonate cover. Stainless steel screws with hexagonal head. EPDM perimetral seal for through wiring by means of PG11 cable-clamp.

Installation

Fixed to the wall or the ceiling with no. 3 4-mm fischer screws placed at 120°.

Colour

White (01) | Grey (15)

Mounting

wall surface

Wiring

Wiring contained in the body of the fitting: 230V 50Hz low loss electronic ballast, 3-pole fast coupling terminal board, possibility of separate starting for each lamp, silicone cables, radio interference filter.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	262	Colour temperature [K]:	4000
W system:	28	Ballast losses [W]:	2
Im source:	1800	Voltage [Vin]:	230
W source:	26	Lamp code:	L129
Luminous efficiency (Im/W, real value):	9.4	Socket:	GX24q-3
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	TC-TEL
Light Output Ratio (L.O.R.) [%]:	15	Number of optical assemblies:	1
CRI:	89	Intervalllo temperatura ambiente:	from -20°C to +35°C.

Polar

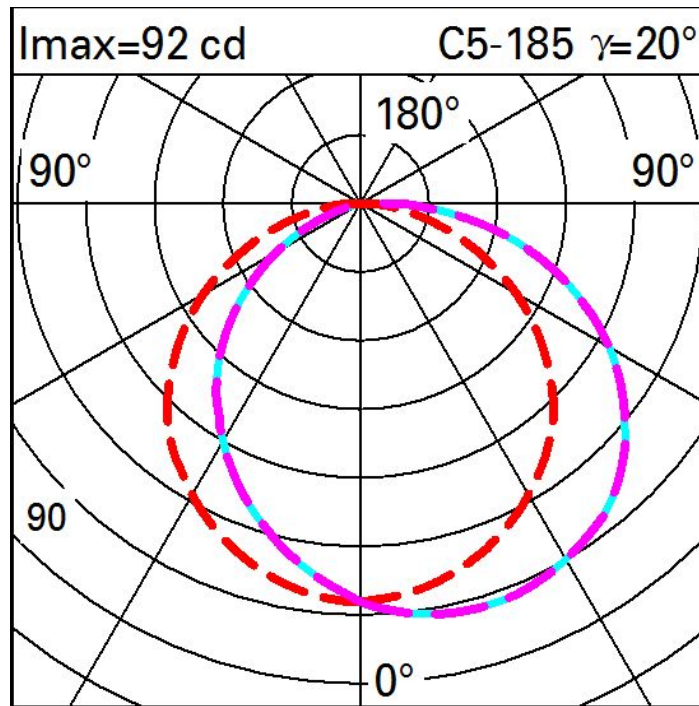

Illuminances

