

Last information update: January 2025

Product configuration: RR24

RR24: Dimmable electronic Ø102mm DALI body - Wide Flood optic - Neutral White

**Product code**

RR24: Dimmable electronic Ø102mm DALI body - Wide Flood optic - Neutral White

Technical description

Adjustable spotlight with adapter for installation on an electrified track or base. High chromatic yield LED lamp with Neutral White (4000K) tone and OptiBeam Lens optic system and Wide Flood optic. Dimmable electronic DALI power supply integrated in product. Luminaire made of die-cast aluminium and thermoplastic material that allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane with mechanical aiming locks. Passive heat dissipation. Spotlight with "Push&Go" system designed to hold up to two flat accessories at the same time. The same system can also be used to apply another external component selected from the directional flaps and anti-glare screen. All internal accessories rotate 360° about the spotlight longitudinal axis.

Installation

Installation on an electrified track or base.

Colour

White (01) | Black (04)

Weight (Kg)

1.33

Mounting

wall surface/ceiling surface

Wiring

Electronic components integrated in product

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1909	CRI (minimum):	90
W system:	19.9	Colour temperature [K]:	4000
Im source:	2300	MacAdam Step:	2
W source:	18	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	95.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	46°	Control:	DALI-2


Polar

Imax=3051 cd		CIE		Lux			
				h	d	Em	Emax
90°	180°	nL 0.83	94-100-100-100-83	2	1.7	577	763
		UGR 17.6-17.6		4	3.4	144	191
		DIN A.61		6	5.1	64	85
		UTE 0.83A+0.00T		8	6.8	36	48
		F*1=944					
		F*1+F*2=997					
		F*1+F*2+F*3=1000					
		CIBSE LG3 L<3000 cd/m² at 65°					
		UGR<19 L<3000 cd/mq @65°					
α = 46°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	68	65	63	68	65	65	62	74
1.0	76	73	70	68	72	69	69	66	79
1.5	81	78	76	74	77	75	74	72	86
2.0	84	82	80	78	80	79	78	76	91
2.5	85	84	82	81	83	81	80	78	94
3.0	87	85	84	83	84	83	82	80	96
4.0	88	87	86	85	85	85	83	81	98
5.0	88	88	87	87	86	86	84	82	99

Luminance curve limit

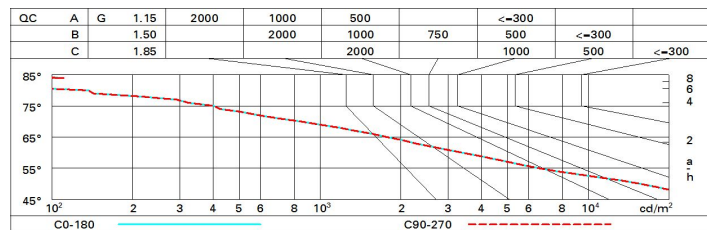

UGR diagram

Corrected UGR values (at 2300 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	18.2	18.8	18.5	19.1	19.3	18.2	18.8	18.5	19.1	19.3
	3H	18.1	18.6	18.4	18.9	19.2	18.1	18.6	18.4	18.9	19.2
	4H	18.0	18.5	18.3	18.8	19.1	18.0	18.5	18.3	18.8	19.1
	6H	17.9	18.4	18.3	18.7	19.0	17.9	18.4	18.3	18.7	19.1
	8H	17.9	18.3	18.2	18.7	19.0	17.9	18.4	18.3	18.7	19.0
	12H	17.8	18.3	18.2	18.6	19.0	17.9	18.3	18.2	18.6	19.0
4H	2H	18.0	18.5	18.3	18.8	19.1	18.0	18.5	18.3	18.8	19.1
	3H	17.9	18.3	18.2	18.6	19.0	17.9	18.3	18.2	18.6	19.0
	4H	17.8	18.2	18.2	18.5	18.9	17.8	18.2	18.2	18.5	18.9
	6H	17.7	18.0	18.1	18.4	18.8	17.7	18.0	18.1	18.4	18.8
	8H	17.6	18.0	18.1	18.4	18.8	17.6	18.0	18.1	18.4	18.8
	12H	17.6	17.9	18.1	18.3	18.8	17.6	17.9	18.1	18.3	18.8
8H	4H	17.6	18.0	18.1	18.4	18.8	17.6	18.0	18.1	18.4	18.8
	6H	17.6	17.8	18.0	18.3	18.7	17.6	17.8	18.0	18.3	18.7
	8H	17.5	17.7	18.0	18.2	18.7	17.5	17.7	18.0	18.2	18.7
	12H	17.5	17.6	18.0	18.1	18.6	17.5	17.6	18.0	18.1	18.6
12H	4H	17.6	17.9	18.1	18.3	18.8	17.6	17.9	18.1	18.3	18.8
	6H	17.5	17.7	18.0	18.2	18.7	17.5	17.7	18.0	18.2	18.7
	8H	17.5	17.6	18.0	18.1	18.6	17.5	17.6	18.0	18.1	18.6
Variations with the observer position at spacing:											
S =	1.0H	4.1 / -8.9					4.1 / -8.9				
	1.5H	6.8 / -13.9					6.8 / -13.9				
	2.0H	8.8 / -17.5					8.8 / -17.5				