


Last information update: May 2024

**Product configuration: P009**  
P009: small body - warm white - wall washer optic



**Product code**  
P009: small body - warm white - wall washer optic **Attention! Code no longer in production**

**Technical description**  
Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Warm White (3000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wall washer light distribution for vertical downlight wall illumination. Electronic ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing an accessory asymmetric screen.


**Installation**  
On an electrified track or base

<b>Colour</b>	<b>Weight (Kg)</b>
Black (04)   Black / White (47)	0.9

**Mounting**  
three circuit track|ceiling surface


**Wiring**  
Product complete with electronic components

Complies with EN60598-1 and pertinent regulations



Technical data			
Im system:	1015	CRI (minimum):	90
W system:	19.6	Colour temperature [K]:	3000
Im source:	1450	MacAdam Step:	2
W source:	17	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	51.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	70	Number of optical assemblies:	1

Polar

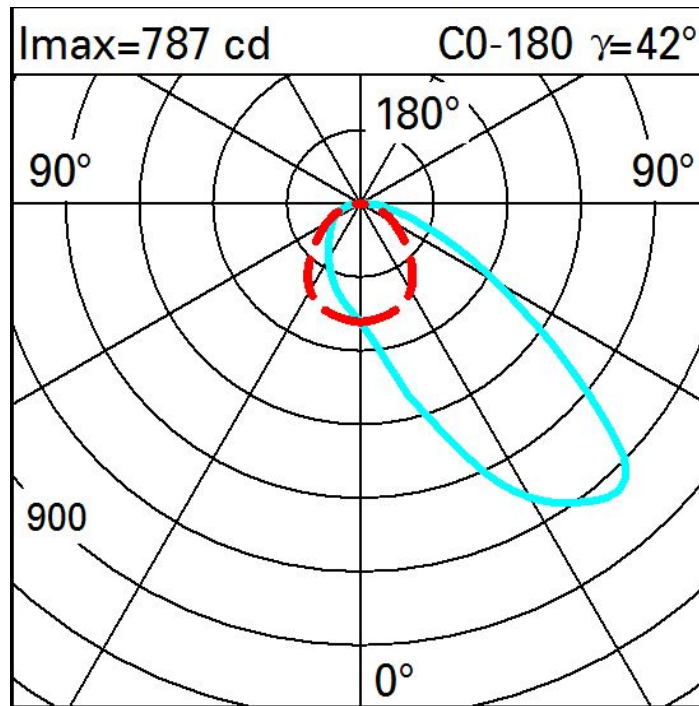

Illuminances

Lux													Wall distance = 1m	
3														
	2	4	11	35	98	156	98	35	11	4	2			
2	3	7	22	70	188	273	188	70	22	7	3			
	4	10	25	59	109	137	109	59	25	10	4			
1	5	10	20	37	54	61	54	37	20	10	5			
	5	9	14	21	27	29	27	21	14	9	5			
0														
	m	-2	-1		0		1		2	3				