
Last information update: November 2024

Product configuration: EP61

EP61: Spotlight with bracket - Warm White LED - DALI - Wide Medium optic



165



Product code

EP61: Spotlight with bracket - Warm White LED - DALI - Wide Medium optic

Technical description

Floodlight designed to use Warm White LED lamps with a Medium optic. Can be installed at ground level, on walls (using screw anchors) and on pole mounting systems. The luminaire consists of an optical assembly/component-holding box and hidden fixing bracket. The optical assembly and front frame are made of die-cast aluminium alloy painted with a smooth finish (grey RAL 9007) or a textured finish (white RAL 9016). The painting process includes a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The next painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The tempered sodium-calcium glass cover has customised serigraphy, is 5mm thick, and joined to the frame with silicone. The frame is fastened to the optical assembly by captive M5 AISI 304 stainless steel screws and a galvanised steel safety cable. The product comes complete with a Warm White colour, monochrome LED circuit, an optic with a 99.93% super-pure aluminium Opti Beam Reflector reflector with a polished, anodized surface and built-in electronic ballast. The component-holding box, in the rear of the luminaire, is set up to hold the control gear, which is fixed with captive screws on a galvanised steel pull-out plate. The control gear can be accessed through the rear door made of painted aluminium alloy, fixed to the product body with four M5 AISI 304 stainless steel captive screws and a safety cable. iPro can be adjusted +95°/-5° relative to the horizontal line using a bracket made of extruded aluminium, on which a graduated scale (with 15° steps) is marked using serigraphy. The internal silicone seals guarantee watertightness IP66h Set up for pass-through wiring using a double M24x1.5 nickel-plated brass cable gland (suitable for cables with 7÷16mm diameter). All external serews used are made of A2 stainless steel. The luminaire technical characteristics

Installation

Ground, wall or ceiling installation using special bracket. Secure using screw anchors for concrete, cement and solid brick.

 Colour
 Weight (Kg)

 White (01) | Black (04) | Grey (15) | Rust Brown (F5)
 3.9

Mounting

 $wall\ arm|ground\ surface|wall\ surface|ground\ anchored|ground\ spike|ceiling\ surface|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-bracket|u-brac$

Wiring

Control gear complete with dimmable DALI electronic ballast.

Notes

Overvoltage protection: 4KV Common Mode and 2KV Differential Mode (we recommend using the JAL6 item code).




Technical data					
Im system:	1920	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)		
W system:	19.5	Voltage [Vin]:	230		
Im source:	2630	Lamp code:	LED		
W source:	17	Number of lamps for optical	1		
Luminous efficiency (lm/W,	98.5	assembly:			
real value):		ZVEI Code:	LED		
Im in emergency mode:	-	Number of optical	1		
Total light flux at or above	0	assemblies:			
an angle of 90° [Lm]:		Intervallo temperatura	from -25°C to 50°C.		
Light Output Ratio (L.O.R.)	73	ambiente:			
[%]:		Power factor:	See installation instructions		
Beam angle [°]:	27°	Inrush current:	5 A / 50 μs		
CRI (minimum):	80	Maximum number of			
Colour temperature [K]:	3000	luminaires of this type per	B10A: 31 luminaires B16A: 50 luminaires		
MacAdam Step:	2	miniature circuit breaker:			
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)		C10A: 52 luminaires C16A: 85 luminaires		
		Overvoltage protection:	4kV Common mode & 2kV Differential mode		
		Control:	DALI-2		

Polar

Imax=7102 cd	C0-180	Lux				
90°	90°	h	d1	d2	Em	Emax
	$ \angle / $	8	4	4	85	111
		16	8	8	21	28
7500		24	12	12	9	12
α=28°	X	32	16	16	5	7

Isolux

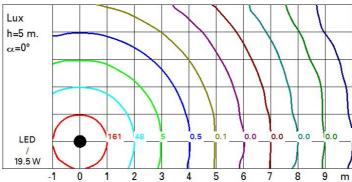

UGR diagram

Riflec	t.:										
ceil/cav walls work pl. Room dim		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50 0.20	0.30	0.50	0.30	0.30	0.50 0.20	0.30	0.50	0.30	0.30
										0.20	
		viewed crosswise					viewed endwise				
	ЗН	8.0	1.3	1.1	1.6	1.8	0.6	1.1	0.9	1.3	1.6
	4H	0.7	1.2	1.1	1.5	1.8	0.5	1.0	8.0	1.3	1.5
	бН	0.7	1.1	1.0	1.4	1.7	0.4	0.9	8.0	1.2	1.5
	8H	0.6	1.0	1.0	1.4	1.7	0.4	8.0	8.0	1.1	1.5
	12H	0.6	1.0	1.0	1.3	1.7	0.4	0.7	0.7	1.1	1.4
4H	2H	0.7	1.2	1.1	1.5	1.8	0.5	1.0	0.9	1.3	1.0
	3H	0.6	1.0	1.0	1.3	1.7	0.4	8.0	8.0	1,1	1.5
	4H	0.5	0.9	0.9	1.2	1.6	0.3	0.6	0.7	1.0	1.4
	6H	0.4	0.7	0.9	1.1	1.5	0.2	0.5	0.6	0.9	1.3
	H8	0.4	0.7	8.0	1.1	1.5	0.2	0.4	0.6	0.9	1.3
	12H	0.3	0.6	8.0	1.0	1.5	0.1	0.4	0.6	8.0	1.2
вн	4H	0.4	0.7	8.0	1.1	1.5	0.2	0.4	0.6	0.9	1.3
	6H	0.3	0.5	8.0	1.0	1.4	0.1	0.3	0.5	0.7	1.
	HS	0.2	0.4	0.7	0.9	1.4	0.0	0.2	0.5	0.7	1.2
	12H	0.2	0.4	0.7	8.0	1.4	-0.0	0.1	0.5	0.6	1.
2H	4H	0.3	0.6	8.0	1.0	1.5	0.1	0.4	0.6	8.0	1.2
	6H	0.2	0.4	0.7	0.9	1.4	0.0	0.2	0.5	0.7	1.2
	H8	0.2	0.4	0.7	8.0	1.4	-0.0	0.1	0.5	0.6	1.1
Variat	tions wi	th the ol	oserverp	noitieo	at spacir	ng:					
S =	1.0H		6	.1 / -10	.7			6.	1 / -10	.3	
	1.5H	8.9 / -12.6				8.9 / -12.2					
	2.0H			9 / -12					9 / -12 .8 / -1		