

Reflex


Design iGuzzini

iGuzzini

Last information update: May 2024

Product configuration: P507

P507: Fixed circular recessed luminaire - Ø 96 mm - neutral white - white optic



Product code

P507: Fixed circular recessed luminaire - Ø 96 mm - neutral white - white optic **Attention! Code no longer in production**

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector painted white with a layer of anti-scratch protection. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General lighting beam.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

Colour
White (01)

Weight (Kg)
0.65

Mounting
ceiling recessed

Wiring
product complete with an electronic ballast

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of
the product once installed



Technical data

lm system:	982	CRI (minimum):	80
W system:	11.2	Colour temperature [K]:	4000
lm source:	1500	MacAdam Step:	2
W source:	8.9	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	87.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	65	Number of optical assemblies:	1
Beam angle [°]:	74°		


Polar

Imax=720 cd		CIE nL 0.65 76-92-98-100-65 UGR 25,0-24.6 DIN A.61 UTE 0.65B+0.00T F*1=764 F*1+F*2=918 F*1+F*2+F*3=983	Lux			
90°	180°		h	d	Em	E _{max}
90°	180°		1	1.5	487	720
750			2	3	122	180
			3	4.5	54	80
			4	6	30	45
α=74°						

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	52	47	44	41	46	43	43	40	61
1.0	55	51	48	45	50	47	47	44	67
1.5	60	57	54	52	56	53	53	50	76
2.0	63	60	58	56	59	57	57	54	82
2.5	65	63	61	59	61	60	59	57	86
3.0	66	64	63	61	63	62	61	58	89
4.0	67	66	65	64	65	64	63	60	92
5.0	68	67	66	65	66	65	64	62	94

Luminance curve limit

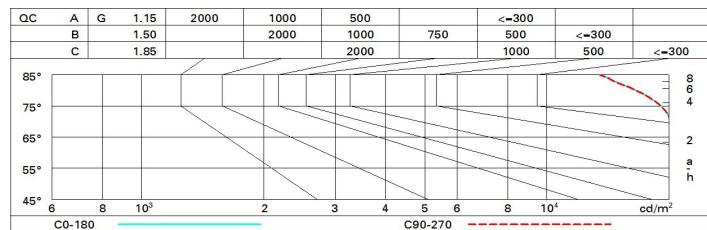

UGR diagram

Corrected UGR values (at 1500 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	22.5	23.4	22.8	23.6	23.9	22.5	23.4	22.8	23.6	23.9
	3H	23.4	24.2	23.7	24.4	24.7	22.7	23.5	23.1	23.8	24.1
	4H	23.8	24.5	24.1	24.8	25.1	22.8	23.5	23.1	23.8	24.2
	6H	24.1	24.8	24.5	25.1	25.4	22.8	23.5	23.2	23.8	24.2
	8H	24.2	24.8	24.6	25.2	25.5	22.8	23.5	23.2	23.8	24.2
	12H	24.2	24.9	24.6	25.2	25.6	22.8	23.4	23.2	23.8	24.1
4H	2H	22.8	23.5	23.1	23.8	24.2	23.8	24.5	24.1	24.8	25.1
	3H	23.9	24.5	24.3	24.9	25.2	24.2	24.9	24.6	25.2	25.6
	4H	24.4	25.0	24.9	25.4	25.8	24.4	25.0	24.9	25.4	25.8
	6H	24.9	25.4	25.3	25.8	26.2	24.6	25.1	25.0	25.5	25.9
	8H	25.0	25.5	25.5	25.9	26.3	24.6	25.1	25.1	25.5	25.9
	12H	25.1	25.5	25.5	25.9	26.4	24.6	25.0	25.1	25.5	25.9
8H	4H	24.6	25.1	25.1	25.5	25.9	25.0	25.5	25.5	25.9	26.3
	6H	25.2	25.6	25.7	26.0	26.5	25.3	25.7	25.8	26.1	26.6
	8H	25.4	25.7	25.9	26.2	26.7	25.4	25.7	25.9	26.2	26.7
	12H	25.5	25.8	26.0	26.3	26.8	25.4	25.7	25.9	26.2	26.7
12H	4H	24.6	25.0	25.1	25.5	25.9	25.1	25.5	25.5	25.9	26.4
	6H	25.2	25.5	25.7	26.0	26.5	25.4	25.7	25.9	26.2	26.7
	8H	25.4	25.7	25.9	26.2	26.7	25.5	25.8	26.0	26.3	26.8
Variations with the observer position at spacing:											
S =	1.0H	0.9 / -0.6					0.9 / -0.6				
	1.5H	1.8 / -0.9					1.8 / -0.9				
	2.0H	3.0 / -1.1					3.0 / -1.1				