


Last information update: June 2023

**Product configuration: MQ08**

MQ08: Ceiling-mounted luminaire - neutral LED - General light - DALI dimmable control gear

**Product code**MQ08: Ceiling-mounted luminaire - neutral LED - General light - DALI dimmable control gear **Attention! Code no longer in production****Technical description**

LED lamp, ceiling-mounted luminaire; integrated DALI dimmable control gear. Die-cast aluminium plate for surface mounting; lathe-shaped aluminium cylindrical body with diffuser element and integrated lamp and optic units; reflector vacuum-metallised with aluminium vapours and finished with a protective, anti-scratch layer; safety glass cover over LED lamp. General lighting optic.

**Installation**

Plate fixed to ceiling using screws and screw anchors (not included); cylindrical body fitted with a mechanical safety fastening; bayonet assembly systems ensuring simple installation and maintenance. Wall or pendant application option available thanks to special accessory kits with a separate code.

**Colour**

White (01) | Grey (15)

**Weight (Kg)**

1.18

**Mounting**

wall surface|ceiling surface|ceiling pendant

**Wiring**

Control gear integrated in luminaire; mains and optic unit connections made with quick coupling terminal blocks.

**Notes**

Kit for wall-mounting: code no. 9439


Complies with EN60598-1 and pertinent regulations



IP23

**Technical data**


lm system:	1118	Colour temperature [K]:	4000
W system:	10.1	MacAdam Step:	2
lm source:	1300	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	7.6	Ballast losses [W]:	2.5
Luminous efficiency (lm/W, real value):	110.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	86	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI

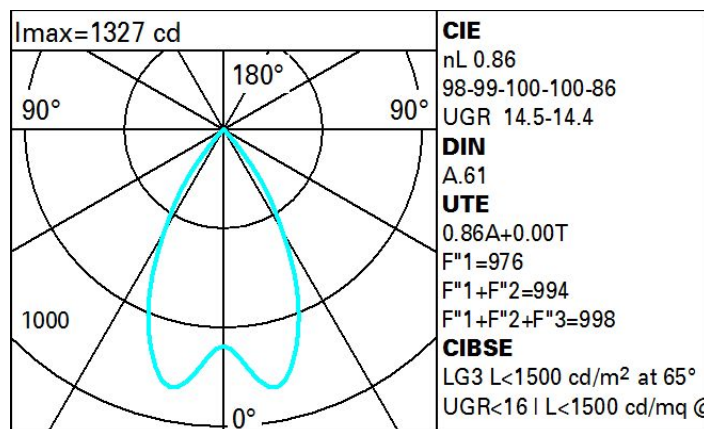**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	73	70	67	72	69	69	66	77
1.0	80	77	74	72	76	73	73	70	81
1.5	85	82	79	78	81	79	78	75	87
2.0	87	85	83	82	84	82	82	79	92
2.5	89	87	86	85	86	85	84	82	95
3.0	90	89	88	87	87	87	86	83	97
4.0	91	90	90	89	89	88	87	85	99
5.0	92	91	91	90	90	89	88	86	100

# Luminance curve limit

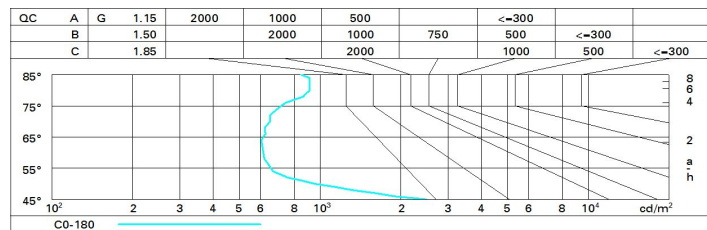

# UGR diagram

Corrected UGR values (at 1300 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.9	15.6	15.2	15.8	16.1	14.9	15.6	15.2	15.8	16.1
	3H	14.8	15.4	15.1	15.7	16.0	14.8	15.4	15.1	15.7	15.9
	4H	14.8	15.3	15.1	15.6	15.9	14.7	15.3	15.1	15.6	15.9
	6H	14.7	15.2	15.1	15.5	15.9	14.7	15.2	15.0	15.5	15.8
	8H	14.7	15.2	15.1	15.5	15.8	14.6	15.1	15.0	15.4	15.8
	12H	14.7	15.1	15.0	15.5	15.8	14.6	15.0	15.0	15.4	15.7
4H	2H	14.7	15.3	15.1	15.6	15.9	14.8	15.3	15.1	15.6	15.9
	3H	14.6	15.1	15.0	15.4	15.8	14.6	15.1	15.0	15.4	15.8
	4H	14.5	15.0	14.9	15.3	15.7	14.5	15.0	14.9	15.3	15.7
	6H	14.5	14.9	14.9	15.3	15.7	14.5	14.8	14.9	15.2	15.6
	8H	14.5	14.8	14.9	15.2	15.7	14.4	14.8	14.9	15.2	15.6
	12H	14.5	14.8	14.9	15.2	15.6	14.4	14.7	14.8	15.1	15.6
8H	4H	14.4	14.8	14.9	15.2	15.6	14.5	14.8	14.9	15.2	15.7
	6H	14.4	14.7	14.9	15.1	15.6	14.4	14.7	14.9	15.1	15.6
	8H	14.4	14.6	14.9	15.1	15.6	14.4	14.6	14.9	15.1	15.6
	12H	14.4	14.6	14.9	15.1	15.6	14.4	14.6	14.9	15.0	15.6
12H	4H	14.4	14.7	14.8	15.1	15.6	14.5	14.8	14.9	15.2	15.6
	6H	14.4	14.6	14.9	15.1	15.6	14.4	14.6	14.9	15.1	15.6
	8H	14.4	14.6	14.9	15.0	15.6	14.4	14.6	14.9	15.1	15.6
Variations with the observer position at spacing:											
S =	1.0H	5.1 / -8.8					5.1 / -8.8				
	1.5H	7.9 / -9.0					7.9 / -9.0				
	2.0H	9.9 / -9.1					9.9 / -9.1				