

Product configuration: BV31**Product code**

Technical description

Installation

Colour

Grey (15)

Weight (Kg)

1.3

Mounting

ceiling recessed

Wiring

Control gear complete with dimmable DALI electronic ballast (220÷240Vac 50/60Hz)

Notes

Plastic adapter disk available for flush-mounting the frame on ceilings made of concrete exposed to view (can only be used with the product with aluminium frame, without the stainless cover). Products set up for installation of a stainless steel safety kit L=2000mm..


Complies with EN60598-1 and pertinent regulations



Technical data

BV31 EN 1 / 2

Polar

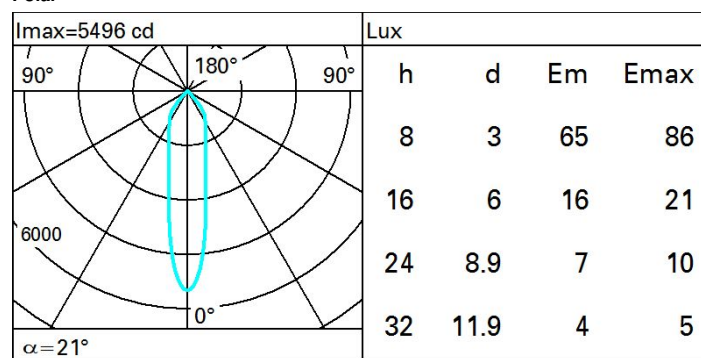

Isolux

