

Last information update: May 2024

Product configuration: MT15

MT15: 596 X 596 mm - warm white LED - electronic control gear - controlled luminance optic UGR<19

**Product code**MT15: 596 X 596 mm - warm white LED - electronic control gear - controlled luminance optic UGR<19 **Attention! Code no longer in production****Technical description**

Direct emission recessed or ceiling-mounted luminaire (with accessories ordered separately) designed to use warm white 3,000K high colour rendering LEDs. The optical assembly consists of a white extruded frame, a satin methacrylate diffuser screen for controlled luminance UGR<19 emission and a sheet metal rear closing base. The LEDs are arranged inside the perimeter and the electronic driver is housed in the upper part of the product.

Installation

Recessed in plasterboard false ceilings (using accessory frame), in false ceilings with frame, in modular false ceilings (even 625 x 625 mm using accessory adapter); possibility of ceiling-mounting using kit to be ordered separately as an accessory

Colour

White (01)


Mounting

ceiling recessed|wall surface|ceiling surface

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	3440	CRI:	80
W system:	30.9	Colour temperature [K]:	3000
lm source:	4300	MacAdam Step:	3
W source:	26	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	111.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1


Polar

	Imax=1678 cd				Lux																									
	90°	180°	90°																											
	1500																													
	0°																													
<p>CIE nL 0.80 61-88-97-100-80 UGR 18.3-17.2 DIN A.51 UTE 0.80C+0.00T F*1=609 F*1+F*2=878 F*1+F*2+F*3=972 CIBSE LG3 L<3000 cd/m² at 65° UGR<19 L<3000 cd/mq @65°</p>					<table><tr><th>h</th><th>d1</th><th>d2</th><th>Em</th><th>Emax</th></tr><tr><td>1</td><td>2</td><td>1.8</td><td>1128</td><td>1677</td></tr><tr><td>2</td><td>4</td><td>3.6</td><td>282</td><td>419</td></tr><tr><td>3</td><td>6</td><td>5.4</td><td>125</td><td>186</td></tr><tr><td>4</td><td>8</td><td>7.2</td><td>70</td><td>105</td></tr></table>	h	d1	d2	Em	Emax	1	2	1.8	1128	1677	2	4	3.6	282	419	3	6	5.4	125	186	4	8	7.2	70	105
h	d1	d2	Em	Emax																										
1	2	1.8	1128	1677																										
2	4	3.6	282	419																										
3	6	5.4	125	186																										
4	8	7.2	70	105																										
<p>$\alpha = 90^\circ / 84^\circ$</p>																														

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	50	45	41	49	45	44	39	49
1.0	63	56	51	47	55	50	50	45	56
1.5	70	65	60	57	63	60	59	54	68
2.0	74	70	66	64	68	65	64	60	76
2.5	77	73	70	68	72	69	68	64	80
3.0	78	76	73	71	74	72	71	67	84
4.0	80	78	76	74	76	75	73	70	88
5.0	82	80	78	76	78	76	75	72	90

Luminance curve limit

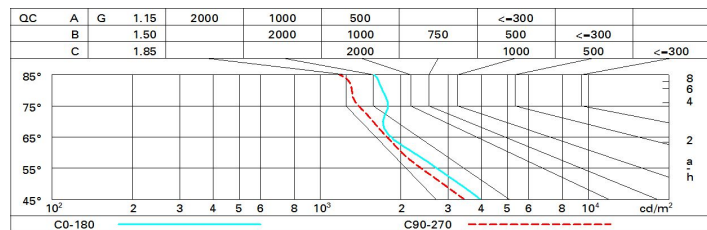

UGR diagram

Corrected UGR values (at 4300 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	15.7	16.7	16.0	17.0	17.2	15.1	16.1	15.4	16.3	16.6
	3H	16.5	17.4	16.9	17.7	18.0	15.4	16.3	15.8	16.6	16.9
	4H	16.9	17.8	17.3	18.1	18.4	15.5	16.3	15.8	16.6	17.0
	6H	17.3	18.1	17.7	18.4	18.7	15.5	16.3	15.9	16.6	16.9
	8H	17.4	18.2	17.8	18.5	18.9	15.5	16.2	15.9	16.6	16.9
	12H	17.5	18.3	17.9	18.6	19.0	15.5	16.2	15.9	16.5	16.9
4H	2H	16.0	16.8	16.3	17.1	17.5	16.3	17.1	16.6	17.4	17.8
	3H	17.0	17.7	17.4	18.1	18.4	16.8	17.5	17.2	17.9	18.3
	4H	17.5	18.2	17.9	18.5	18.9	17.0	17.6	17.4	18.0	18.4
	6H	18.1	18.6	18.5	19.0	19.5	17.1	17.7	17.6	18.1	18.5
	8H	18.3	18.8	18.7	19.2	19.7	17.2	17.7	17.6	18.1	18.5
	12H	18.4	18.9	18.9	19.3	19.8	17.2	17.7	17.6	18.1	18.6
8H	4H	17.7	18.2	18.1	18.6	19.0	17.6	18.1	18.1	18.6	19.0
	6H	18.4	18.8	18.8	19.2	19.7	17.9	18.3	18.4	18.8	19.3
	8H	18.7	19.0	19.2	19.5	20.0	18.0	18.4	18.5	18.9	19.4
	12H	18.9	19.3	19.4	19.7	20.3	18.1	18.5	18.6	18.9	19.5
12H	4H	17.7	18.1	18.1	18.6	19.0	17.7	18.2	18.2	18.6	19.1
	6H	18.4	18.8	18.9	19.2	19.7	18.1	18.4	18.5	18.9	19.4
	8H	18.8	19.1	19.3	19.6	20.1	18.2	18.6	18.7	19.0	19.6
Variations with the observer position at spacing:											
S =	1.0H	0.2 / -0.3					0.2 / -0.3				
	1.5H	0.4 / -0.9					0.4 / -1.0				
	2.0H	1.0 / -1.3					0.9 / -1.3				