

Laser Blade


Design iGuzzini

iGuzzini

Last information update: April 2024

Product configuration: Q942

Q942: Frame recessed luminaire - 15 cells - General Lighting Pro - DALI

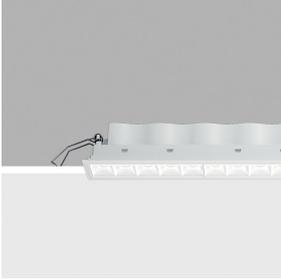

Product code

Q942: Frame recessed luminaire - 15 cells - General Lighting Pro - DALI

Technical description

Rectangular recessed luminaire with 15 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. The total white finish and the patented technology of the optic system guarantee an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic control gear connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 406.

Colour
White (01)

Weight (Kg)
0.86


Mounting

wall recessed|ceiling recessed

Wiring

On control gear box with quick-coupling connections.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	2475	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	33.5	Lamp code:	LED
lm source:	3300	Number of lamps for optical assembly:	1
W source:	30	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	73.9	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	5.5 A / 55 µs
Light Output Ratio (L.O.R.) [%]:	75	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 20 luminaires B16A: 32 luminaires C10A: 33 luminaires C16A: 54 luminaires
CRI (minimum):	90	Minimum dimming %:	1
CRI (typical):	92	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	3		


Polar

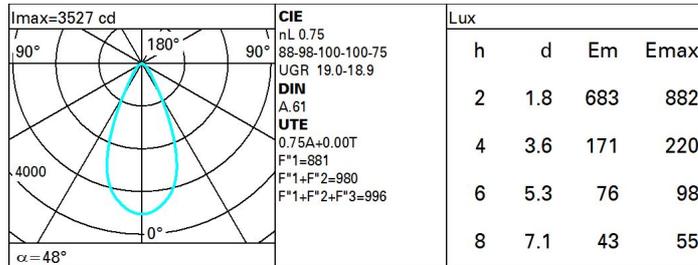

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	64	59	56	54	58	56	55	52	70
1.0	67	63	60	58	62	60	59	56	75
1.5	72	69	66	64	68	66	65	62	83
2.0	75	72	70	69	71	70	69	66	88
2.5	76	74	73	72	73	72	71	69	92
3.0	77	76	75	74	75	74	73	71	94
4.0	79	77	77	76	76	75	74	72	96
5.0	79	78	78	77	77	76	75	73	97

Luminance curve limit

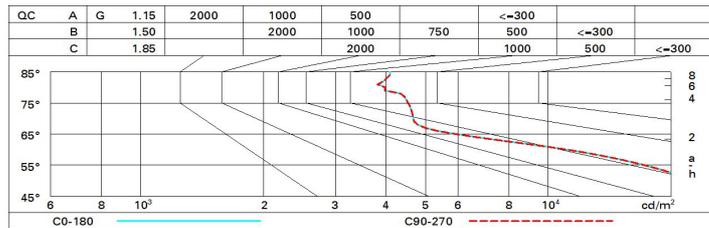

UGR diagram

Corrected UGR values (at 3300 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	18.9	19.5	19.2	19.8	20.0	18.9	19.5	19.2	19.8	20.0
	3H	18.9	19.5	19.2	19.8	20.1	18.9	19.5	19.2	19.8	20.1
	4H	18.9	19.5	19.2	19.8	20.1	18.9	19.4	19.2	19.7	20.0
	6H	18.9	19.4	19.3	19.7	20.1	18.8	19.3	19.2	19.7	20.0
	8H	18.9	19.4	19.3	19.7	20.1	18.8	19.3	19.1	19.6	20.0
12H	18.9	19.4	19.3	19.7	20.1	18.7	19.2	19.1	19.6	19.9	
4H	2H	18.9	19.4	19.2	19.7	20.0	18.9	19.5	19.2	19.8	20.1
	3H	18.9	19.4	19.3	19.8	20.1	19.0	19.5	19.4	19.8	20.2
	4H	19.0	19.4	19.4	19.8	20.2	19.0	19.4	19.4	19.8	20.2
	6H	19.0	19.4	19.5	19.8	20.2	19.0	19.3	19.4	19.7	20.1
	8H	19.0	19.4	19.5	19.8	20.2	18.9	19.3	19.4	19.7	20.1
12H	19.0	19.3	19.5	19.8	20.2	18.9	19.2	19.3	19.6	20.1	
8H	4H	18.9	19.3	19.4	19.7	20.1	19.0	19.4	19.5	19.8	20.2
	6H	19.0	19.3	19.5	19.7	20.2	19.0	19.3	19.5	19.8	20.2
	8H	19.0	19.3	19.5	19.7	20.2	19.0	19.3	19.5	19.7	20.2
	12H	19.1	19.3	19.6	19.8	20.3	19.0	19.2	19.5	19.7	20.2
12H	4H	18.9	19.2	19.3	19.6	20.1	19.0	19.3	19.5	19.8	20.2
	6H	19.0	19.2	19.5	19.7	20.2	19.1	19.3	19.5	19.8	20.3
	8H	19.0	19.2	19.5	19.7	20.2	19.1	19.3	19.6	19.8	20.3
Variations with the observer position at spacing:											
S =	1.0H	1.4 / -1.5				1.4 / -1.5					
	1.5H	3.1 / -3.7				3.1 / -3.7					
	2.0H	4.8 / -4.9				4.8 / -4.9					