


N236: Empotrable circular fijo - Ø 125 mm - warm white - óptica wide flood - UGR<19



N236 ES 1 / 2

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	65	63	67	64	64	61	76
1.0	75	72	69	67	71	68	68	65	81
1.5	79	77	74	73	76	74	73	70	87
2.0	82	80	78	77	79	77	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	81	80	78	97
4.0	86	85	84	84	83	83	82	80	98
5.0	86	86	85	85	84	84	82	80	99

Curva límite de luminancia

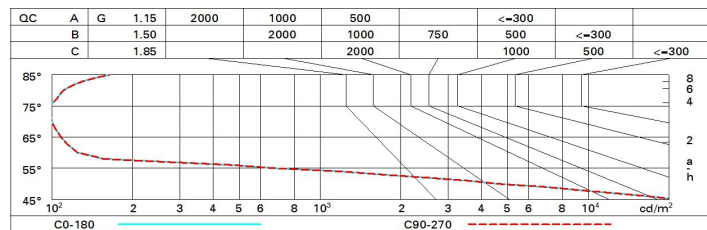


Diagrama UGR

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	20.2	20.8	20.5	21.1	21.3	20.2	20.8	20.5	21.1	21.3
	3H	20.1	20.6	20.4	20.9	21.2	20.1	20.6	20.4	20.9	21.2
	4H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
	6H	19.9	20.4	20.3	20.7	21.0	19.9	20.4	20.3	20.7	21.0
	8H	19.9	20.3	20.3	20.7	21.0	19.9	20.3	20.3	20.7	21.0
	12H	19.9	20.3	20.2	20.6	21.0	19.9	20.3	20.2	20.6	21.0
4H	2H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
	3H	19.9	20.3	20.2	20.6	21.0	19.9	20.3	20.2	20.6	21.0
	4H	19.8	20.1	20.2	20.5	20.9	19.8	20.1	20.2	20.5	20.9
	6H	19.7	20.0	20.1	20.4	20.8	19.7	20.0	20.1	20.4	20.8
	8H	19.6	19.9	20.1	20.4	20.8	19.6	19.9	20.1	20.4	20.8
	12H	19.6	19.9	20.0	20.3	20.7	19.6	19.9	20.0	20.3	20.7
8H	4H	19.6	19.9	20.1	20.4	20.8	19.6	19.9	20.1	20.4	20.8
	6H	19.5	19.8	20.0	20.2	20.7	19.5	19.8	20.0	20.2	20.7
	8H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
	12H	19.4	19.6	19.9	20.1	20.6	19.4	19.6	19.9	20.1	20.6
12H	4H	19.6	19.9	20.0	20.3	20.7	19.6	19.9	20.0	20.3	20.7
	6H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
	8H	19.4	19.6	19.9	20.1	20.6	19.4	19.6	19.9	20.1	20.6
Variations with the observer position at spacing:											
S =		1.0H					4.7 / -26.2				
		1.5H					7.5 / -31.2				
		2.0H					9.5 / -31.4				