

Front Light

Design iGuzzini


iGuzzini

Last information update: April 2024

Product configuration: N283+J005

N283: pendant - Warm White - Flood Optic

J005: Suspension L = 500 mm



Product code

N283: pendant - Warm White - Flood Optic **Attention! Code no longer in production**

Technical description

Pendant luminaire equipped with a three-phase adapter for electrified tracks, made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (during maintenance operations too). Luminaire for high output C.O.B. technology LED lamp with monochrome emission in a warm white colour tone (3000K) CRI 90. Flood optic. Equipped with electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. An external component may also be applied, such as directional flaps with 360° rotation.

Installation

On an electrified track

Colour

White (01) | Black (04)

Weight (Kg)

2.4

Mounting

three circuit track pendant|ceiling surface

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	4178	CRI:	90
W system:	44.1	Colour temperature [K]:	3000
lm source:	5300	MacAdam Step:	2
W source:	41	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	94.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	30°		


Polar

Imax=13655 cd		CIE		Lux			
				h	d	Em	E _{max}
90°		nL 0.79		2	1.1	2881	3414
		99-100-100-100-79		4	2.1	720	853
		UGR <10-10		6	3.2	320	379
		DIN		8	4.3	180	213
		A. 61					
		UTE					
		0.79A+0.00T					
		F*1=993					
		F*1+F*2=998					
		F*1+F*2+F*3=999					
		CIBSE					
		LG3 L<1500 cd/m² at 65°					
		UGR<10 L<1500 cd/mq @65°					
α=30°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	64	64	61	78
1.0	74	71	68	67	70	68	68	65	83
1.5	78	75	73	72	74	73	72	70	88
2.0	80	78	77	76	77	76	75	73	93
2.5	82	80	79	78	79	78	77	75	96
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

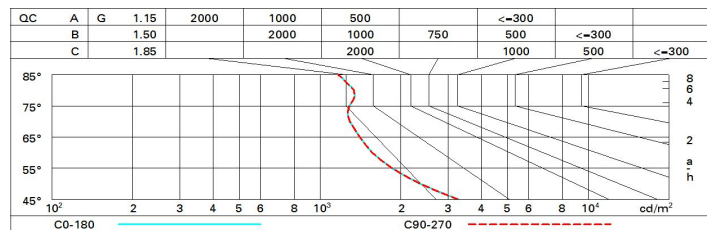

UGR diagram

Corrected UGR values (at 5300 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	4.4	4.9	4.7	5.2	5.4	4.4	4.9	4.7	5.2	5.4
	3H	4.6	5.1	4.9	5.4	5.6	4.4	4.9	4.7	5.1	5.4
	4H	4.7	5.2	5.1	5.5	5.8	4.4	4.8	4.7	5.1	5.4
	6H	4.9	5.3	5.2	5.6	5.9	4.3	4.8	4.7	5.1	5.4
	8H	4.9	5.3	5.3	5.6	6.0	4.3	4.7	4.7	5.0	5.4
	12H	4.9	5.3	5.3	5.7	6.0	4.3	4.7	4.7	5.0	5.3
4H	2H	4.4	4.8	4.7	5.1	5.4	4.7	5.2	5.1	5.5	5.8
	3H	4.7	5.1	5.1	5.4	5.8	4.9	5.2	5.2	5.6	5.9
	4H	4.9	5.2	5.3	5.6	6.0	4.9	5.2	5.3	5.6	6.0
	6H	5.1	5.4	5.6	5.8	6.2	4.9	5.2	5.4	5.6	6.0
	8H	5.2	5.5	5.7	5.9	6.3	4.9	5.2	5.4	5.6	6.0
	12H	5.3	5.5	5.7	6.0	6.4	4.9	5.2	5.4	5.6	6.0
8H	4H	4.9	5.2	5.4	5.6	6.0	5.2	5.5	5.7	5.9	6.3
	6H	5.3	5.5	5.7	5.9	6.4	5.4	5.6	5.8	6.0	6.5
	8H	5.4	5.6	5.9	6.1	6.6	5.4	5.6	5.9	6.1	6.6
	12H	5.5	5.7	6.0	6.2	6.7	5.4	5.6	5.9	6.1	6.6
12H	4H	4.9	5.2	5.4	5.6	6.0	5.3	5.5	5.7	6.0	6.4
	6H	5.3	5.5	5.8	5.9	6.4	5.4	5.6	5.9	6.1	6.6
	8H	5.4	5.6	5.9	6.1	6.6	5.5	5.7	6.0	6.2	6.7
Variations with the observer position at spacing:											
S =	1.0H	3.9 / -2.1					3.9 / -2.1				
	1.5H	6.3 / -2.5					6.3 / -2.5				
	2.0H	8.2 / -2.7					8.2 / -2.7				