
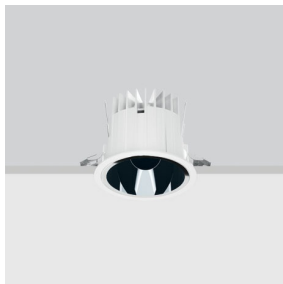


Last information update: April 2024

Product configuration: N236

N236: Fixed circular recessed luminaire - Ø125 mm - warm white - wide flood optic - UGR<19

**Product code**

N236: Fixed circular recessed luminaire - Ø125 mm - warm white - wide flood optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone (3000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° wide flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.02

Mounting

ceiling recessed

Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2590	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	24.9	Lamp code:	LED
lm source:	3200	Number of lamps for optical assembly:	1
W source:	22	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	104	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	18 A / 250 µs
Light Output Ratio (L.O.R.) [%]:	81	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
Beam angle [°]:	64°	Minimum dimming %:	1
CRI (minimum):	80	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	2		


Polar

 Imax=2569 cd α=64°	CIE nL 0.81 96-100-100-100-81 UGR 19.6-19.6 DIN A.61 UTE 0.81A+0.00T F*1=961 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m ² at 65°			
	Lux			
	h	d	Em	Emax
	2	2.5	491	642
	4	5	123	161
	6	7.5	55	71
	8	10	31	40

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	65	63	67	64	64	61	76
1.0	75	72	69	67	71	68	68	65	81
1.5	79	77	74	73	76	74	73	70	87
2.0	82	80	78	77	79	77	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	81	80	78	97
4.0	86	85	84	84	83	83	82	80	98
5.0	86	86	85	85	84	84	82	80	99

Luminance curve limit

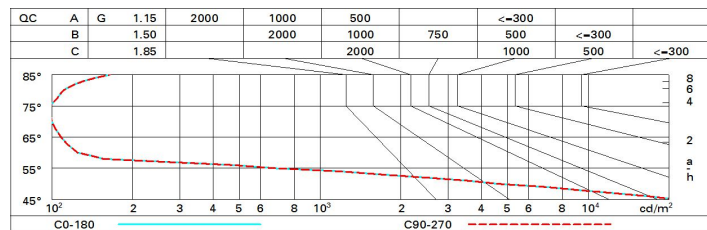

UGR diagram

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	20.2	20.8	20.5	21.1	21.3	20.2	20.8	20.5	21.1	21.3
	3H	20.1	20.6	20.4	20.9	21.2	20.1	20.6	20.4	20.9	21.2
	4H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
	6H	19.9	20.4	20.3	20.7	21.0	19.9	20.4	20.3	20.7	21.0
	8H	19.9	20.3	20.3	20.7	21.0	19.9	20.3	20.3	20.7	21.0
	12H	19.9	20.3	20.2	20.6	21.0	19.9	20.3	20.2	20.6	21.0
4H	2H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
	3H	19.9	20.3	20.2	20.6	21.0	19.9	20.3	20.2	20.6	21.0
	4H	19.8	20.1	20.2	20.5	20.9	19.8	20.1	20.2	20.5	20.9
	6H	19.7	20.0	20.1	20.4	20.8	19.7	20.0	20.1	20.4	20.8
	8H	19.6	19.9	20.1	20.4	20.8	19.6	19.9	20.1	20.4	20.8
	12H	19.6	19.9	20.0	20.3	20.7	19.6	19.9	20.0	20.3	20.7
8H	4H	19.6	19.9	20.1	20.4	20.8	19.6	19.9	20.1	20.4	20.8
	6H	19.5	19.8	20.0	20.2	20.7	19.5	19.8	20.0	20.2	20.7
	8H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
	12H	19.4	19.6	19.9	20.1	20.6	19.4	19.6	19.9	20.1	20.6
12H	4H	19.6	19.9	20.0	20.3	20.7	19.6	19.9	20.0	20.3	20.7
	6H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
	8H	19.4	19.6	19.9	20.1	20.6	19.4	19.6	19.9	20.1	20.6
Variations with the observer position at spacing:											
S =	1.0H	4.7 / -26.2					4.7 / -26.2				
	1.5H	7.5 / -31.2					7.5 / -31.2				
	2.0H	9.5 / -31.4					9.5 / -31.4				