

Last information update: April 2025

Product configuration: MV85

MV85: Fixed circular recessed luminaire - Ø 75 mm - warm white - wide flood optic - UGR<19



Product code

MV85: Fixed circular recessed luminaire - Ø 75 mm - warm white - wide flood optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone CRI90 (2700K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° wide flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Weight (Kg)

0.41


Mounting

ceiling recessed

Wiring

product complete with DALI components


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	868	CRI (minimum):	90
W system:	10.7	Colour temperature [K]:	2700
lm source:	1100	MacAdam Step:	2
W source:	8.4	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	81.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	52°	Control:	DALI


Polar

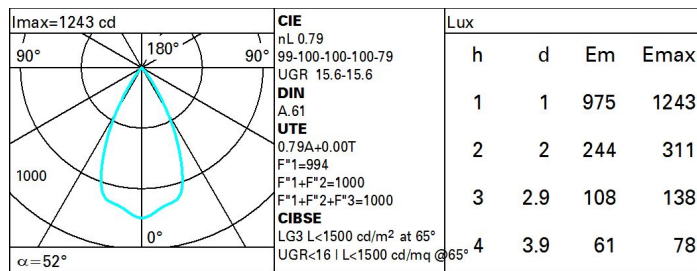

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	64	64	62	78
1.0	74	71	69	67	70	68	68	65	83
1.5	78	75	74	72	75	73	72	70	88
2.0	80	79	77	76	78	76	75	73	93
2.5	82	81	79	79	79	78	78	75	96
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	83	82	81	79	100

Luminance curve limit

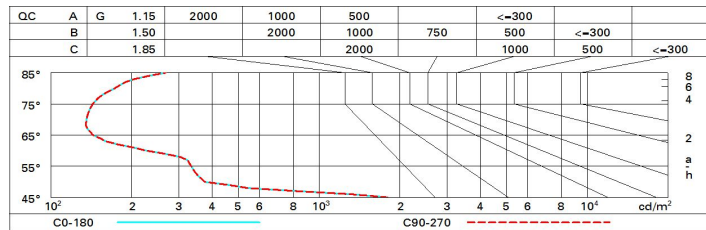

UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	10.2	10.7	10.4	17.0	17.2	10.2	10.7	10.4	17.0	17.2
	3H	10.0	10.6	10.3	10.8	17.1	10.0	10.6	10.3	10.8	17.1
	4H	10.0	10.4	10.3	10.7	17.0	10.0	10.4	10.3	10.7	17.0
	6H	15.9	10.3	10.2	10.6	17.0	15.9	10.3	10.2	10.6	17.0
	8H	15.8	10.3	10.2	10.6	10.9	15.8	10.3	10.2	10.6	10.9
	12H	15.8	10.2	10.2	10.6	10.9	15.8	10.2	10.2	10.6	10.9
4H	2H	10.0	10.4	10.3	10.7	17.0	10.0	10.4	10.3	10.7	17.0
	3H	15.8	10.2	10.2	10.6	10.9	15.8	10.2	10.2	10.6	10.9
	4H	15.7	10.1	10.1	10.4	10.8	15.7	10.1	10.1	10.4	10.8
	6H	15.6	15.9	10.1	10.3	10.8	15.6	15.9	10.1	10.3	10.8
	8H	15.6	15.9	10.0	10.3	10.7	15.6	15.9	10.0	10.3	10.7
	12H	15.5	15.8	10.0	10.2	10.7	15.5	15.8	10.0	10.2	10.7
8H	4H	15.6	15.9	10.0	10.3	10.7	15.6	15.9	10.0	10.3	10.7
	6H	15.5	15.7	10.0	10.2	10.6	15.5	15.7	10.0	10.2	10.6
	8H	15.4	15.6	15.9	10.1	10.6	15.4	15.6	15.9	10.1	10.6
	12H	15.4	15.6	15.9	10.0	10.6	15.4	15.6	15.9	10.0	10.6
12H	4H	15.5	15.8	10.0	10.2	10.7	15.5	15.8	10.0	10.2	10.7
	6H	15.4	15.6	15.9	10.1	10.6	15.4	15.6	15.9	10.1	10.6
	8H	15.4	15.6	15.9	10.0	10.6	15.4	15.6	15.9	10.0	10.6
Variations with the observer position at spacing:											
S =	1.0H	6.0 / -23.7					6.0 / -23.7				
	1.5H	8.8 / -24.6					8.8 / -24.6				
	2.0H	10.8 / -25.0					10.8 / -25.0				