

Last information update: September 2024

Product configuration: P639

P639: medium body - neutral white - wide flood optic

**Product code**

P639: medium body - neutral white - wide flood optic

Technical description

Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Neutral White (4,000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wide flood light distribution. DALI ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing a range of outdoor accessories including an anti-glare and an asymmetric screen.

Installation

On an electrified track or base

Colour

Black (04) | Black / White (47)

Weight (Kg)

1.35


Mounting

three circuit track|ceiling surface

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	3159	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	27.8	Lamp code:	LED
Im source:	3900	Number of lamps for optical assembly:	1
W source:	25	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	113.6	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	9 A / 22 µs
Light Output Ratio (L.O.R.) [%]:	81	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
Beam angle [°]:	84° / 102°	Minimum dimming %:	1
CRI (minimum):	80	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	4000	Control:	DALI-2
MacAdam Step:	3		


Polar

 $\alpha = 83^\circ / 102^\circ$	CIE nL 0.81 63-91-99-100-81 UGR 27.1-32.5 DIN A.51 UTE 0.81C+0.00T F*1=631 F*1+F*2=913 F*1+F*2+F*3=990					Lux				
	h	d1	d2	Em	E _{max}					
	1	1.8	2.5	969	1469					
	2	3.6	4.9	242	367					
	3	5.3	7.4	108	163					
	4	7.1	9.9	61	92					

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	59	52	47	43	51	46	46	41	51
1.0	64	58	53	49	57	52	52	47	58
1.5	72	67	63	59	65	62	61	57	70
2.0	76	72	69	66	71	68	67	63	78
2.5	79	75	73	70	74	71	70	67	83
3.0	80	78	75	73	76	74	73	69	86
4.0	82	80	78	76	78	77	75	72	89
5.0	83	81	80	78	80	78	77	74	91

Luminance curve limit

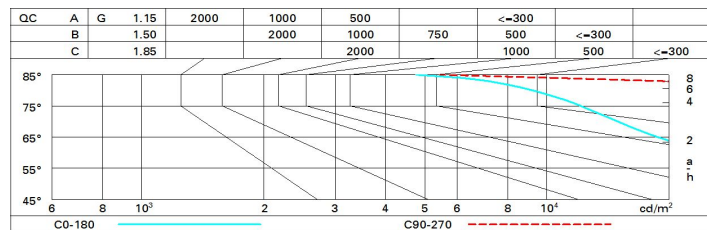

UGR diagram

Corrected UGR values (at 3900 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	26.0	27.5	26.9	27.7	28.0	31.1	32.0	31.4	32.3	32.5
	3H	26.5	27.3	26.9	27.6	27.9	31.2	32.0	31.5	32.3	32.6
	4H	26.5	27.2	26.8	27.5	27.8	31.1	31.9	31.5	32.2	32.5
	6H	26.4	27.1	26.8	27.4	27.8	31.1	31.8	31.4	32.1	32.4
	8H	26.4	27.1	26.8	27.4	27.7	31.0	31.7	31.4	32.0	32.4
	12H	26.4	27.0	26.7	27.3	27.7	31.0	31.6	31.4	32.0	32.3
4H	2H	27.2	28.0	27.6	28.3	28.6	32.4	33.1	32.7	33.4	33.7
	3H	27.2	27.9	27.6	28.2	28.6	32.6	33.2	33.0	33.6	33.9
	4H	27.2	27.7	27.6	28.1	28.5	32.6	33.2	33.0	33.6	33.9
	6H	27.1	27.6	27.6	28.0	28.4	32.6	33.1	33.0	33.5	33.9
	8H	27.1	27.5	27.5	28.0	28.4	32.5	33.0	33.0	33.4	33.8
	12H	27.1	27.5	27.5	27.9	28.4	32.5	32.9	32.9	33.3	33.8
8H	4H	27.4	27.8	27.8	28.2	28.7	32.8	33.3	33.3	33.7	34.1
	6H	27.3	27.7	27.8	28.1	28.6	32.8	33.2	33.3	33.6	34.1
	8H	27.3	27.6	27.8	28.1	28.6	32.8	33.1	33.3	33.6	34.1
	12H	27.2	27.5	27.8	28.0	28.5	32.8	33.0	33.3	33.5	34.0
12H	4H	27.4	27.8	27.8	28.2	28.7	32.8	33.2	33.2	33.6	34.1
	6H	27.3	27.6	27.8	28.1	28.6	32.8	33.1	33.3	33.6	34.1
	8H	27.3	27.6	27.8	28.1	28.6	32.8	33.0	33.3	33.5	34.0
Variations with the observer position at spacing:											
S =		1.0H	1.3 / -2.8				0.3 / -0.3				
		1.5H	2.3 / -5.1				0.6 / -1.1				
		2.0H	3.6 / -6.5				1.3 / -1.6				