

Last information update: March 2025

Product configuration: ET11

ET11: Spotlight with bracket - Neutral White LED - Integrated Ballast - Wall Washer optic - Ta 40°

**Product code**

ET11: Spotlight with bracket - Neutral White LED - Integrated Ballast - Wall Washer optic - Ta 40°

Technical description

Spotlight designed to use LED lamps and a Wall Washer optic. Consists of a die-cast aluminium optical assembly, bracket and box for the ballast with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Neutral White monochrome LED circuit. The electronic DALI ballast is integrated in the product and compatible with remote management systems. Compatible with programming systems via DALI terminals or an NFC system. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Installation

Floor, ceiling or wall-mounted installation.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

9.35

Wiring


Double PG.

Complies with EN60598-1 and pertinent regulations




IK08

IP66

**Technical data**

Im system:	6014	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W system:	63.3	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Im source:	9700	Lamp code:	LED
W source:	57	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	95	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	62	Power factor:	See installation instructions
CRI (minimum):	80	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Colour temperature [K]:	4000	Control:	DALI-2
MacAdam Step:	3		

Polar

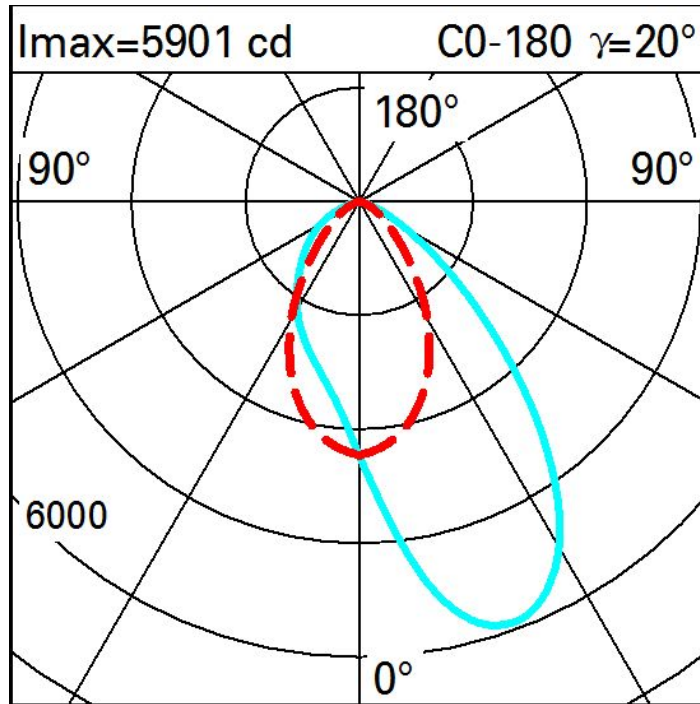

Illuminances

Lux Wall distance = 1m

3											
	0.6	3	12	40	89	112	82	32	8	2	0.4
2	9	23	54	118	200	262	244	133	51	18	7
	18	35	68	122	189	253	296	214	102	42	17
1	21	36	60	98	141	193	244	208	122	62	30
	20	32	50	73	96	130	168	165	122	73	38
0											
	m	-2	-1	0	1	2	3				