

Last information update: March 2025

**Product configuration: MQ72**

MQ72: Recessed frame - LED - Warm white - Incorporated DALI dimmable power supply - Wall washer optic



**Product code**


MQ72: Recessed frame - LED - Warm white - Incorporated DALI dimmable power supply - Wall washer optic

**Technical description**

Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Asymmetrical optic system designed to achieve an effective wall washer distribution. Flux enhancer - superpure aluminium reflector - screen in PMMA with ribbed texture; a special film in acrylic material, combined with the screen, allow for a uniform and effective light emission on the wall. Black polycarbonate internal perimeter frame. Supplied with DALI dimmable control gear connected to the luminaire. Warm white high colour rendering LED.

**Installation**

recessed with steel springs for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal) - preparation slot 37 x 274. To light the wall correctly check the installation distances and centre-to-centre distances on the instructions sheet.



**Colour**

Black / Black (43) | Black / White (47) | Grey / Black (74)\*

**Weight (Kg)**

0.65

\* Colours on request

**Mounting**

wall recessed|ceiling recessed

**Wiring**

on power box: screw connections

**Notes**

dimming function with pushbutton (TOUCH DIM/PUSH): for this option consult the instructions included in the package. Accessory anti-glare screen available code MPX8.


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	721	CRI (typical):	97
W system:	24.5	Colour temperature [K]:	3000
lm source:	1850	MacAdam Step:	3
W source:	20	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	29.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	39	Number of optical assemblies:	1
CRI (minimum):	95	Control:	DALI-2

Polar

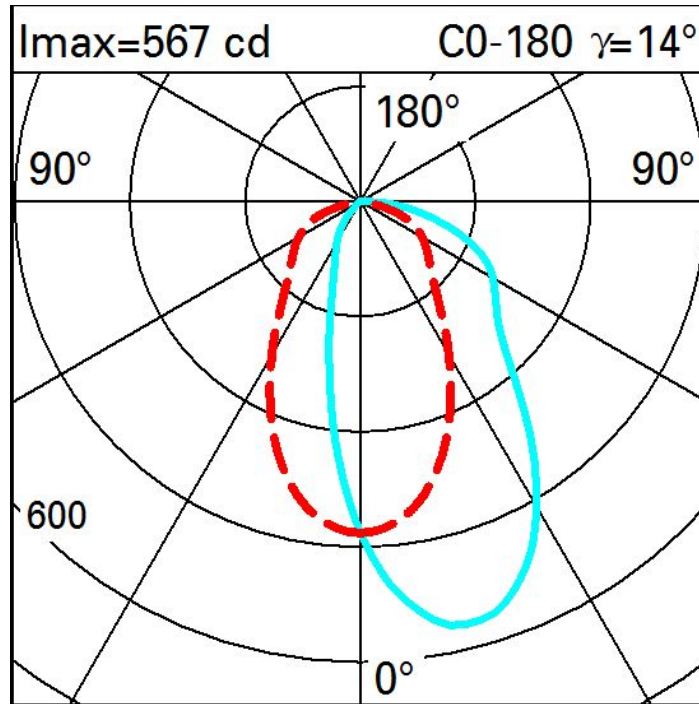

Illuminances

Lux      Wall distance = 1m

3															
	2	4	10	28	78	132	78	28	10	4	2				
2	4	7	15	32	68	95	68	32	15	7	4				
	4	7	14	29	55	72	55	29	14	7	4				
1	4	7	12	24	39	47	39	24	12	7	4				
	3	6	11	18	25	29	25	18	11	6	3				
0															
	m	-2	-1	0	1	2	3								