


Last information update: March 2025

Product configuration: 867A

867A: Indoor, surface-mounted floodlight – Warm White – Integrated power supply - DALI-2

**Product code**

867A: Indoor, surface-mounted floodlight – Warm White – Integrated power supply - DALI-2

Technical description

Floodlight designed to use LED lamps and a GL optic. Consisting of an optical assembly, a swivel joint, a glass-holding frame and a fork made of aluminium alloy, subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation and sealing. The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. Transparent, 4mm thick, tempered sodium-calcium closing glass. The gasket is in black silicone. The product includes a Warm White monochrome circuit fitted with 1 reflector with an Opti Beam Reflector. The electronic DALI-2 power supply is integrated in the product and compatible with remote management systems. The frame includes steel retaining cables. The swivel joint allows the luminaire to be adjusted vertically by 180°. All external screws used are made of A2 stainless steel.

Colour

White (01) | Black (04) | Grey (15) | Grey / Yellow (73) | Rust Brown (F5)

Weight (Kg)

3.25

Mounting

wall surface

Complies with EN60598-1 and pertinent regulations

**Technical data**

| | | | |
|--|-------|---------------------------------------|---|
| lm system: | 2563 | Life Time LED 1: | > 50,000h - L90 - B10 (Ta 25°C) |
| W system: | 19.9 | Life Time LED 2: | > 50,000h - L90 - B10 (Ta 40°C) |
| lm source: | 2980 | Lamp code: | LED |
| W source: | 17 | Number of lamps for optical assembly: | 1 |
| Luminous efficiency (lm/W, real value): | 128.8 | ZVEI Code: | LED |
| lm in emergency mode: | - | Number of optical assemblies: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Power factor: | See installation instructions |
| Light Output Ratio (L.O.R.) [%]: | 86 | Minimum dimming %: | 1 |
| CRI (minimum): | 80 | Overvoltage protection: | 2kV Common mode & 1kV Differential mode |
| Colour temperature [K]: | 3000 | Control: | DALI-2 |
| MacAdam Step: | 2 | | |


Polar

| | | | | | | | | | | | | | |
|--------------|--|---------|--|-----|--|------------------|--|---|--|------|------|-----|------|
| Imax=1055 cd | | C10-190 | | CIE | | Lux | | | | | | | |
| 90° | | 180° | | 90° | | nL 0.86 | | h | | d1 | d2 | Em | Emax |
| | | | | | | 58-93-100-100-86 | | 1 | | 2.6 | 2.7 | 651 | 1051 |
| | | | | | | UGR 24.5-24.8 | | 2 | | 5.2 | 5.3 | 163 | 263 |
| | | | | | | DIN | | 3 | | 7.9 | 8 | 72 | 117 |
| | | | | | | A.51 | | 4 | | 10.5 | 10.6 | 41 | 66 |
| | | | | | | UTE | | | | | | | |
| | | | | | | 0.86C+0.00T | | | | | | | |
| | | | | | | F*1=581 | | | | | | | |
| | | | | | | F*1+F*2=932 | | | | | | | |
| | | | | | | F*1+F*2+F*3=999 | | | | | | | |
| α = 105° | | 0° | | | | | | | | | | | |

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 61 | 53 | 47 | 43 | 51 | 46 | 46 | 41 | 47 |
| 1.0 | 67 | 60 | 54 | 50 | 58 | 53 | 53 | 48 | 56 |
| 1.5 | 76 | 70 | 66 | 62 | 69 | 65 | 64 | 59 | 69 |
| 2.0 | 80 | 76 | 72 | 69 | 75 | 71 | 70 | 66 | 77 |
| 2.5 | 83 | 80 | 77 | 74 | 78 | 75 | 74 | 70 | 82 |
| 3.0 | 85 | 82 | 79 | 77 | 80 | 78 | 77 | 73 | 85 |
| 4.0 | 87 | 84 | 83 | 81 | 83 | 81 | 80 | 76 | 89 |
| 5.0 | 88 | 86 | 84 | 83 | 84 | 83 | 81 | 78 | 91 |

Luminance curve limit

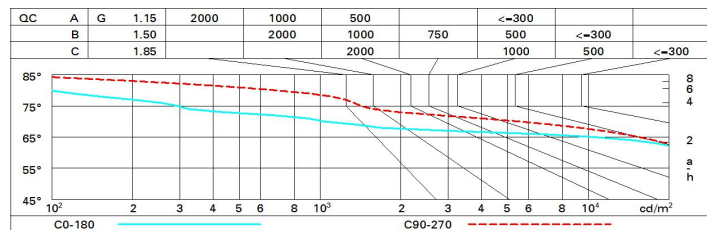

UGR diagram

| Corrected UGR values (at 2980 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|-----|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| 2H | 2H | 24.4 | 25.4 | 24.7 | 25.7 | 26.0 | 24.7 | 25.7 | 25.0 | 26.0 | 26.2 |
| | 3H | 24.4 | 25.3 | 24.8 | 25.6 | 25.9 | 24.9 | 25.8 | 25.2 | 26.1 | 26.4 |
| | 4H | 24.3 | 25.2 | 24.7 | 25.5 | 25.8 | 24.9 | 25.7 | 25.2 | 26.0 | 26.3 |
| | 6H | 24.3 | 25.0 | 24.6 | 25.4 | 25.7 | 24.8 | 25.6 | 25.2 | 25.9 | 26.2 |
| | 8H | 24.2 | 25.0 | 24.6 | 25.3 | 25.7 | 24.8 | 25.5 | 25.2 | 25.8 | 26.2 |
| | 12H | 24.2 | 24.9 | 24.6 | 25.2 | 25.6 | 24.7 | 25.4 | 25.1 | 25.8 | 26.1 |
| 4H | 2H | 24.7 | 25.5 | 25.0 | 25.8 | 26.1 | 24.7 | 25.6 | 25.1 | 25.9 | 26.2 |
| | 3H | 24.7 | 25.4 | 25.1 | 25.7 | 26.1 | 25.0 | 25.7 | 25.3 | 26.0 | 26.4 |
| | 4H | 24.6 | 25.2 | 25.0 | 25.6 | 26.0 | 24.9 | 25.5 | 25.3 | 25.9 | 26.3 |
| | 6H | 24.5 | 25.0 | 24.9 | 25.4 | 25.9 | 24.9 | 25.4 | 25.3 | 25.8 | 26.2 |
| | 8H | 24.5 | 25.0 | 24.9 | 25.4 | 25.8 | 24.8 | 25.3 | 25.3 | 25.7 | 26.2 |
| | 12H | 24.4 | 24.9 | 24.9 | 25.3 | 25.8 | 24.8 | 25.2 | 25.2 | 25.6 | 26.1 |
| 8H | 4H | 24.5 | 25.0 | 24.9 | 25.4 | 25.8 | 24.8 | 25.3 | 25.3 | 25.7 | 26.2 |
| | 6H | 24.4 | 24.8 | 24.9 | 25.2 | 25.7 | 24.7 | 25.1 | 25.2 | 25.6 | 26.1 |
| | 8H | 24.3 | 24.7 | 24.8 | 25.2 | 25.7 | 24.7 | 25.0 | 25.2 | 25.5 | 26.0 |
| | 12H | 24.3 | 24.6 | 24.8 | 25.1 | 25.6 | 24.6 | 24.9 | 25.2 | 25.4 | 25.9 |
| 12H | 4H | 24.4 | 24.9 | 24.9 | 25.3 | 25.8 | 24.8 | 25.2 | 25.2 | 25.6 | 26.1 |
| | 6H | 24.3 | 24.7 | 24.8 | 25.2 | 25.7 | 24.7 | 25.0 | 25.2 | 25.5 | 26.0 |
| | 8H | 24.3 | 24.6 | 24.8 | 25.1 | 25.6 | 24.6 | 24.9 | 25.2 | 25.4 | 25.9 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | | 1.0H | | | | | 0.4 / -0.7 | | | | |
| | | 1.5H | | | | | 1.1 / -2.5 | | | | |
| | | 2.0H | | | | | 2.4 / -12.7 | | | | |