

Last information update: March 2025

**Product configuration: 979A.01**

979A.01: Palco LV spotlight Ø 51 - Wide Flood beam - DALI Powerline - 15.9W 1110lm - 3500K - CRI 90 - White



**Product code**

979A.01: Palco LV spotlight Ø 51 - Wide Flood beam - DALI Powerline - 15.9W 1110lm - 3500K - CRI 90 - White

**Technical description**

Miniaturised adjustable spotlight with adapter for installation on 48V low voltage track. Made of die-cast aluminium with passive dissipation system. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «Power line» technology allows each spotlight on the track to be adjusted separately. The swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic unit guarantees a high level of visual comfort. Thermoplastic high definition lens with extra filter for variable optic. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

**Installation**

An adapter is used to fix the device mechanically and tool-free to the 48V track.

**Colour**  
White (01)

**Weight (Kg)**  
0.28

**Mounting**

Low voltage track


**Wiring**

Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.

**Notes**

Technical and anti-glare accessories available.


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	1110	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	15.9	Voltage [Vin]:	48
lm source:	1500	Lamp code:	LED
W source:	15	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	69.8	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	LED current [mA]:	400
Light Output Ratio (L.O.R.) [%]:	74	Power factor:	See installation instructions
Beam angle [°]:	46°	Minimum dimming %:	5
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3500	Dimming mode:	CCR
MacAdam Step:	2	Control:	DALI

Polar

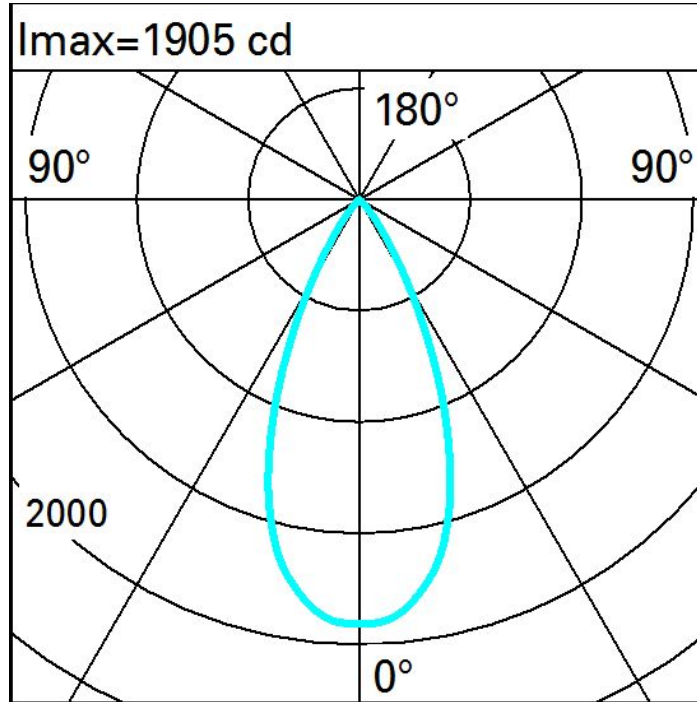

Illuminances

