

## Reflex

Design iGuzzini

iGuzzini

Last information update: May 2024

### Product configuration: Q985

Q985: adjustable luminaire - Ø 96 mm - warm white - medium optic - frame



### Product code

Q985: adjustable luminaire - Ø 96 mm - warm white - medium optic - frame

### Technical description

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a warm white colour tone 2700K (CRI 90). Version with rim for surface-mounting. Painted, die-cast aluminium body. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

### Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

### Weight (Kg)

0.49


### Mounting

ceiling recessed

### Wiring

Product complete with DALI components

Complies with EN60598-1 and pertinent regulations



### Technical data

|  |      |  |  |
|--|------|--|--|
| lm system:   | 734  | Life Time LED 1:   | > 50,000h - L90 - B10 (Ta 25°C)  |
| W system:  | 16.5 | Lamp code:   | LED  |
| lm source:   | 1600 | Number of lamps for optical assembly:                                    | 1  |
| W source:  | 14   | ZVEI Code:   | LED  |
| Luminous efficiency (lm/W, real value):            | 44.5 | Number of optical assemblies:  | 1  |
| lm in emergency mode:                              | -    | Power factor:  | See installation instructions  |
| Total light flux at or above an angle of 90° [Lm]: | 0    | Inrush current:  | 16 A / 220 µs  |
| Light Output Ratio (L.O.R.) [%]:                   | 46   | Maximum number of luminaires of this type per miniature circuit breaker: | B10A: 15 luminaires<br>B16A: 24 luminaires<br>C10A: 24 luminaires<br>C16A: 40 luminaires |
| Beam angle [°]:                                    | 25°  | Overvoltage protection:  | 2kV Common mode & 1kV Differential mode  |
| CRI (minimum):                                     | 90   | Dimming mode:  | PWM  |
| Colour temperature [K]:                            | 2700 | Control:   | DALI   |
| MacAdam Step:                                      | 2    |  |  |


### Polar

|              |  |        |  |                             |  |      |  |
|--------------|--|--------|--|-----------------------------|--|------|--|
| Imax=3347 cd |  | C0-180 |  | CIE                         |  | Lux  |  |
| 90°          |  | 180°   |  | nL 0.46                     |  | h    |  |
|              |  |        |  | 99-100-100-100-46           |  | d1   |  |
|              |  |        |  | UGR <10-10                  |  | d2   |  |
|              |  |        |  | DIN                         |  | Em   |  |
|              |  |        |  | A.61                        |  | Emax |  |
|              |  |        |  | UTE                         |  |      |  |
|              |  |        |  | 0.46A+0.00T                 |  |      |  |
|              |  |        |  | F*1=995                     |  |      |  |
|              |  |        |  | F*1+F*2=1000                |  |      |  |
|              |  |        |  | F*1+F*2+F*3=1000            |  |      |  |
|              |  |        |  | CIBSE                       |  |      |  |
|              |  |        |  | LG3 L<1500 cd/m² at 65°     |  |      |  |
|              |  |        |  | UGR<10   L<1500 cd/m² @ 65° |  |      |  |
| α=25°        |  |        |  |                             |  |      |  |

# Utilisation factors

| R    | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 41 | 39 | 38 | 37 | 39 | 37 | 37 | 36 | 78  |
| 1.0  | 43 | 41 | 40 | 39 | 41 | 40 | 39 | 38 | 83  |
| 1.5  | 45 | 44 | 43 | 42 | 43 | 42 | 42 | 41 | 88  |
| 2.0  | 47 | 46 | 45 | 44 | 45 | 44 | 44 | 43 | 93  |
| 2.5  | 48 | 47 | 46 | 46 | 46 | 46 | 45 | 44 | 96  |
| 3.0  | 48 | 48 | 47 | 47 | 47 | 46 | 46 | 45 | 98  |
| 4.0  | 49 | 48 | 48 | 48 | 48 | 47 | 47 | 46 | 99  |
| 5.0  | 49 | 49 | 48 | 48 | 48 | 48 | 47 | 46 | 100 |

# Luminance curve limit

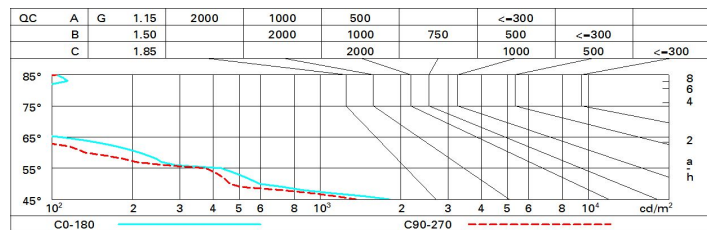

# UGR diagram

| Corrected UGR values (at 1000 lm bare lamp luminous flux)        |      |                     |      |      |      |      |                   |      |      |      |      |
|--|------|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.:<br>ceiling/cav<br>walls<br>work pl.<br>Room dim<br>x y |      | viewed<br>crosswise |      |      |      |      | viewed<br>endwise |      |      |      |      |
|  |      | 0.70                | 0.70 | 0.50 | 0.50 | 0.30 | 0.70              | 0.70 | 0.50 | 0.50 | 0.30 |
|  |      | 0.50                | 0.30 | 0.50 | 0.30 | 0.30 | 0.50              | 0.30 | 0.50 | 0.30 | 0.30 |
|  |      | 0.20                | 0.20 | 0.20 | 0.20 | 0.20 | 0.20              | 0.20 | 0.20 | 0.20 | 0.20 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 2H   | 2H   | 0.6                 | 2.7  | 1.0  | 3.1  | 3.4  | 0.2               | 2.4  | 0.6  | 2.7  | 3.0  |
|  | 3H   | 0.4                 | 2.1  | 0.8  | 2.4  | 2.8  | 0.1               | 1.8  | 0.5  | 2.1  | 2.5  |
|  | 4H   | 0.4                 | 1.8  | 0.8  | 2.1  | 2.5  | 0.0               | 1.4  | 0.4  | 1.8  | 2.1  |
|  | 6H   | 0.3                 | 1.4  | 0.7  | 1.7  | 2.1  | 0.0               | 1.1  | 0.4  | 1.4  | 1.8  |
|  | 8H   | 0.3                 | 1.3  | 0.7  | 1.7  | 2.1  | -0.0              | 1.0  | 0.4  | 1.4  | 1.7  |
|  | 12H  | 0.3                 | 1.3  | 0.7  | 1.6  | 2.0  | -0.1              | 0.9  | 0.3  | 1.3  | 1.7  |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 4H   | 2H   | 0.4                 | 1.8  | 0.8  | 2.1  | 2.5  | 0.0               | 1.4  | 0.4  | 1.8  | 2.1  |
|  | 3H   | 0.3                 | 1.3  | 0.7  | 1.6  | 2.0  | -0.1              | 0.9  | 0.3  | 1.3  | 1.7  |
|  | 4H   | 0.2                 | 1.1  | 0.6  | 1.5  | 1.9  | -0.2              | 0.8  | 0.2  | 1.2  | 1.6  |
|  | 6H   | -0.2                | 1.5  | 0.3  | 1.9  | 2.4  | -0.6              | 1.1  | -0.1 | 1.6  | 2.1  |
|  | 8H   | -0.3                | 1.6  | 0.1  | 2.0  | 2.5  | -0.7              | 1.2  | -0.2 | 1.7  | 2.2  |
|  | 12H  | -0.4                | 1.5  | 0.1  | 2.0  | 2.5  | -0.8              | 1.2  | -0.3 | 1.7  | 2.2  |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 8H   | 4H   | -0.4                | 1.5  | 0.1  | 2.0  | 2.5  | -0.7              | 1.2  | -0.2 | 1.7  | 2.2  |
|  | 6H   | -0.5                | 1.4  | 0.0  | 1.8  | 2.4  | -0.8              | 1.0  | -0.3 | 1.5  | 2.1  |
|  | 8H   | -0.5                | 1.2  | 0.0  | 1.7  | 2.2  | -0.8              | 0.8  | -0.3 | 1.3  | 1.9  |
|  | 12H  | -0.3                | 0.8  | 0.2  | 1.3  | 1.8  | -0.7              | 0.4  | -0.2 | 0.9  | 1.5  |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 12H  | 4H   | -0.5                | 1.5  | 0.0  | 2.0  | 2.5  | -0.8              | 1.2  | -0.3 | 1.7  | 2.2  |
|  | 6H   | -0.5                | 1.1  | 0.0  | 1.6  | 2.2  | -0.8              | 0.8  | -0.3 | 1.3  | 1.9  |
|  | 8H   | -0.3                | 0.8  | 0.2  | 1.3  | 1.8  | -0.7              | 0.4  | -0.1 | 0.9  | 1.5  |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| Variations with the observer position at spacing:                |      |                     |      |      |      |      |                   |      |      |      |      |
| S =  | 1.0H | 3.9 / -8.6          |      |      |      |      | 4.4 / -9.8        |      |      |      |      |
|  | 1.5H | 6.7 / -13.5         |      |      |      |      | 7.2 / -11.8       |      |      |      |      |
|  | 2.0H | 8.6 / -13.5         |      |      |      |      | 9.2 / -14.1       |      |      |      |      |