

Last information update: March 2025

Product configuration: ET24

ET24: Spotlight with bracket - Warm White LED - Integrated Ballast - Wall Washer optic - Ta 25°

**Product code**

ET24: Spotlight with bracket - Warm White LED - Integrated Ballast - Wall Washer optic - Ta 25°

Technical description

Spotlight designed to use LED lamps and a Wall Washer optic. Consists of a die-cast aluminium optical assembly, bracket and box for the ballast with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Warm White monochrome LED circuit. The electronic DALI ballast is integrated in the product and compatible with remote management systems. Compatible with programming systems via DALI terminals or an NFC system. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Installation

Floor, ceiling or wall-mounted installation.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

9.35

Wiring


Double PG.

Complies with EN60598-1 and pertinent regulations




IK08

IP66

**Technical data**

Im system:	7494	MacAdam Step:	3
W system:	86.9	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	11850	Lamp code:	LED
W source:	78	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	86.2	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 35°C.
Light Output Ratio (L.O.R.) [%]:	63	Power factor:	See installation instructions
CRI (minimum):	80	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2

Polar

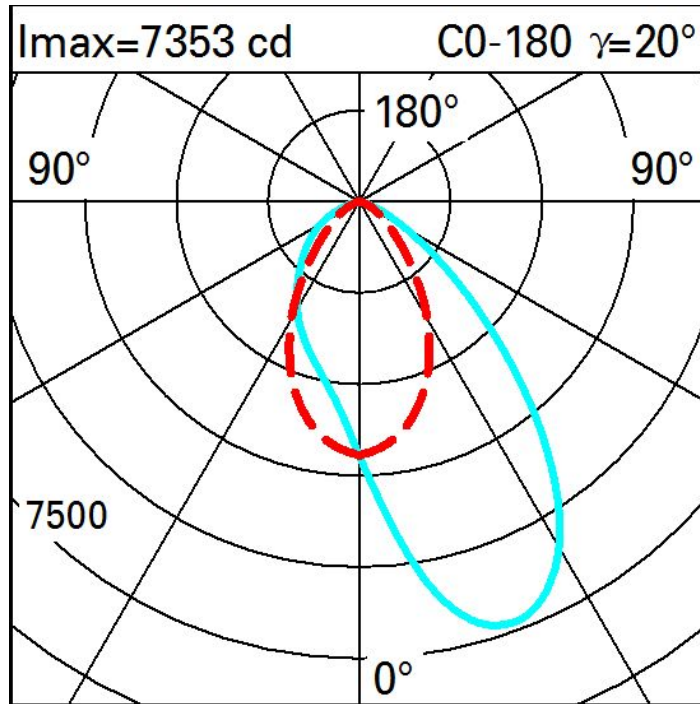

Illuminances

Lux Wall distance = 1m

3												
	0.8	4	15	49	111	140	102	40	10	2	0.5	
2	11	28	68	147	250	306	306	166	64	23	9	
	22	44	84	153	236	316	370	267	127	52	22	
1	27	45	75	122	176	241	305	261	152	78	37	
	25	40	62	91	120	163	210	207	152	92	48	
0												
	m	-2	-1	0	1	2	3					