



Last information update: October 2023

**Product configuration: Q817.01**

Q817.01: Fixed square recessed luminaire - Minimal - LED - wide flood - Super Comfort - White

**Product code**Q817.01: Fixed square recessed luminaire - Minimal - LED - wide flood - Super Comfort - White **Attention! Code no longer in production****Technical description**

Square Minimal recessed luminaire (frameless). Fixed Super Comfort version: the LEDs are set a long way back to minimize glare and guarantee a high level of visual comfort. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - wide flood optic (58°). Die-cast aluminium structure installed flush with ceiling. Adapter for false ceilings between 12.5 and 25 mm thick. The internal ring is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included High color rendering index 2700K LED. Power unit available with a separate code no.

**Installation**

For flush with ceiling installation, an adapter is fitted according to the thickness of the false ceiling (12.5 to 25 mm). The following filling and finishing operations are simplified by a special protection template, and the luminaire is recessed in the adapter by means of an anti-fall steel wire spring.

**Colour**

White (01)

**Weight (Kg)**

0.34

**Mounting**

wall recessed|ceiling recessed

**Wiring**

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

**Notes**

A wide range of decorative accessories and diffusers is available - a special protection template is also included to facilitate decorating the ceiling around the flush finish.


Complies with EN60598-1 and pertinent regulations



IP20

On the visible part of  
the product once installed**Technical data**


Im system:	972	Colour temperature [K]:	2700
W system:	9.9	MacAdam Step:	2
Im source:	1200	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	9.9	Ballast losses [W]:	0
Luminous efficiency (Im/W, real value):	98.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	56°	LED current [mA]:	300
CRI (minimum):	90		

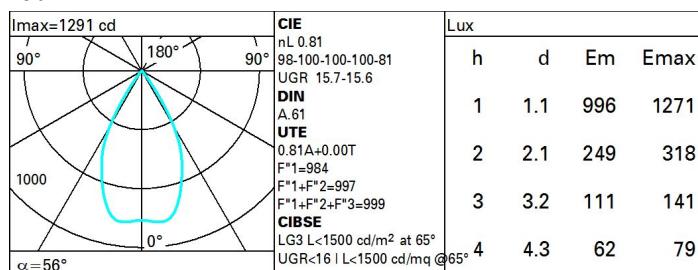**Polar**

### Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	69	66	64	68	66	65	63	77
1.0	76	72	70	68	72	69	69	66	82
1.5	80	77	75	73	76	74	74	71	88
2.0	82	80	79	78	79	78	77	75	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	83	82	81	79	97
4.0	86	85	85	84	84	83	82	80	99
5.0	86	86	85	85	85	84	83	81	100

### Luminance curve limit

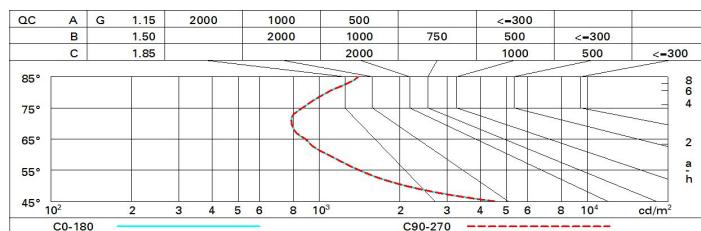

### UGR diagram

Corrected UGR values (at 1200 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim	viewed crosswise					viewed endwise					
X Y											
2H 2H	16.2	16.8	16.5	17.0	17.3	16.2	16.8	16.5	17.0	17.3	
3H	16.1	16.6	16.4	16.9	17.1	16.0	16.6	16.4	16.9	17.1	
4H	16.0	16.5	16.3	16.8	17.1	16.0	16.5	16.3	16.8	17.1	
6H	15.9	16.4	16.3	16.7	17.0	15.9	16.4	16.3	16.7	17.0	
8H	15.9	16.3	16.3	16.7	17.0	15.9	16.3	16.2	16.6	17.0	
12H	15.9	16.3	16.2	16.6	17.0	15.8	16.3	16.2	16.6	16.9	
4H 2H	16.0	16.5	16.3	16.8	17.1	16.0	16.5	16.3	16.8	17.1	
3H	15.8	16.3	16.2	16.6	17.0	15.8	16.3	16.2	16.6	17.0	
4H	15.8	16.1	16.2	16.5	16.9	15.8	16.1	16.2	16.5	16.9	
6H	15.7	16.0	16.1	16.4	16.8	15.7	16.0	16.1	16.4	16.8	
8H	15.7	16.0	16.1	16.4	16.8	15.6	15.9	16.1	16.4	16.8	
12H	15.6	15.9	16.1	16.3	16.8	15.6	15.9	16.0	16.3	16.7	
8H 4H	15.6	15.9	16.1	16.4	16.8	15.7	16.0	16.1	16.4	16.8	
6H	15.6	15.8	16.0	16.3	16.7	15.6	15.8	16.0	16.3	16.7	
8H	15.5	15.7	16.0	16.2	16.7	15.5	15.7	16.0	16.2	16.7	
12H	15.5	15.7	16.0	16.2	16.7	15.5	15.7	16.0	16.2	16.7	
12H 4H	15.6	15.9	16.0	16.3	16.7	15.6	15.9	16.1	16.3	16.8	
6H	15.5	15.7	16.0	16.2	16.7	15.5	15.8	16.0	16.2	16.7	
8H	15.5	15.7	16.0	16.2	16.7	15.5	15.7	16.0	16.2	16.7	

Variations with the observer position at spacing:

S = 1.0H	6.2 / -10.9	6.2 / -10.9
1.5H	9.0 / -11.4	9.0 / -11.4
2.0H	11.0 / -11.6	11.0 / -11.6