


Last information update: June 2023

Product configuration: MS39+LED

MS39: Recessed DALI extractable-control gear

**Product code**MS39: Recessed DALI extractable-control gear **Attention! Code no longer in production****Technical description**

Die-cast aluminium and thermoplastic material, recessed luminaire complete with C.O.B technology LED lamp in a 3000K warm white colour tone with high color rendering index. Luminaire with flood optic complete with high level light output and uniform distribution OPTIBEAM reflector. The product permits an internal rotation around the 335° vertical axis and the 65° horizontal plane with continuous friction (only on this rotation). Product complete with a DALI driver separate from the luminaire.

Installation

Recessed in false ceilings, with thicknesses starting from between 1 mm and 20 mm, using special steel torsion springs and hinged brackets.

Colour

White (01) | Grey (15)

Weight (Kg)

3.05

Mounting

ceiling recessed

Wiring

product complete with DALI components


Notes

For compliance with the NFC 20-455 standard use an optional filter code MW57 for each optical assembly

Complies with EN60598-1 and pertinent regulations

**Technical data**


Im system:	2920	CRI:	90
W system:	38.5	Colour temperature [K]:	3000
Im source:	3700	MacAdam Step:	3
W source:	34	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	75.8	Ballast losses [W]:	4.5
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	79	ZVEI Code:	LED
Beam angle [°]:	36°	Number of optical assemblies:	1

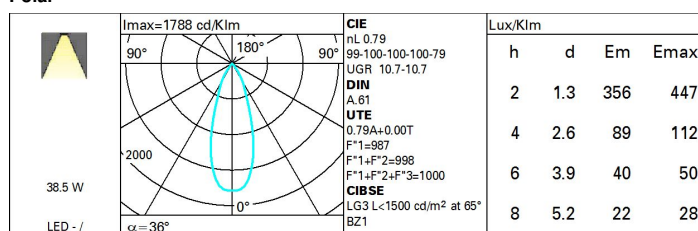Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	62	66	64	64	61	78
1.0	74	71	68	66	70	68	67	65	82
1.5	78	75	73	72	74	73	72	70	88
2.0	80	78	77	76	77	76	75	73	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	81	80	79	77	97
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

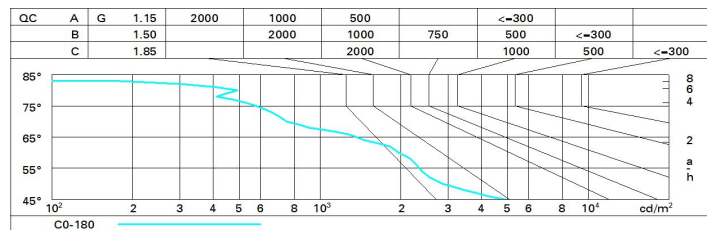

UGR diagram

Photometric curve code: MS270000.X77											
Uncorrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.:											
ceiling	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim											
x											
y											
2H	2H	11.3	11.9	11.5	12.1	12.3	11.3	11.9	11.5	12.1	12.3
	3H	11.1	11.7	11.5	12.0	12.2	11.1	11.7	11.5	12.0	12.2
	4H	11.1	11.6	11.4	11.9	12.2	11.1	11.6	11.4	11.9	12.2
	6H	11.0	11.5	11.3	11.8	12.1	11.0	11.5	11.3	11.8	12.1
	8H	11.0	11.4	11.3	11.7	12.1	11.0	11.4	11.3	11.7	12.1
	12H	10.9	11.4	11.3	11.7	12.0	10.9	11.3	11.3	11.7	12.0
4H	2H	11.1	11.6	11.4	11.9	12.2	11.1	11.6	11.4	11.9	12.2
	3H	10.9	11.4	11.3	11.7	12.1	10.9	11.4	11.3	11.7	12.1
	4H	10.8	11.2	11.2	11.6	12.0	10.8	11.2	11.2	11.6	12.0
	6H	10.8	11.1	11.2	11.5	11.9	10.8	11.1	11.2	11.5	11.9
	8H	10.7	11.0	11.2	11.4	11.9	10.7	11.0	11.2	11.4	11.9
	12H	10.7	10.9	11.1	11.4	11.8	10.7	10.9	11.1	11.4	11.8
8H	4H	10.7	11.0	11.2	11.4	11.9	10.7	11.0	11.2	11.4	11.9
	6H	10.6	10.9	11.1	11.3	11.8	10.6	10.9	11.1	11.3	11.8
	8H	10.6	10.8	11.1	11.2	11.7	10.6	10.8	11.1	11.2	11.7
	12H	10.5	10.7	11.0	11.2	11.7	10.5	10.7	11.0	11.2	11.7
12H	4H	10.7	10.9	11.1	11.4	11.8	10.7	10.9	11.1	11.4	11.8
	6H	10.6	10.8	11.1	11.2	11.7	10.6	10.8	11.1	11.2	11.7
	8H	10.5	10.7	11.0	11.2	11.7	10.5	10.7	11.0	11.2	11.7
Variations with the observer position at spacing:											
S =	1.0H		5.8	/	-12.5		5.8	/	-12.5		
	1.5H		8.6	/	-13.5		8.6	/	-13.5		
	2.0H		10.6	/	-16.1		10.6	/	-16.1		