


Last information update: April 2024

Product configuration: MU26

MU26: Square recess - neutral white - electronic ballast - general light optic with controlled luminance UGR<19

**Product code**MU26: Square recess - neutral white - electronic ballast - general light optic with controlled luminance UGR<19 **Attention! Code no longer in production****Technical description**

Recessed fixed square luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED unit in a neutral white tone 4000K and electronic driver separate from the luminaire. General light distribution, with controlled luminance (UGR<19).

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1

Mounting

ceiling recessed

Wiring


Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1759	CRI:	80
W system:	15.8	Colour temperature [K]:	4000
lm source:	2000	MacAdam Step:	3
W source:	13	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	111.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	88	Number of optical assemblies:	1


Polar

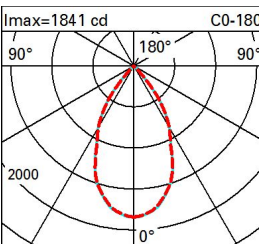 <p>Imax=1841 cd</p> <p>C0-180</p> <p>90° 180° 90°</p> <p>2000</p> <p>0°</p> <p>α=58°</p>	CIE nL 0.88 93-100-100-100-88 UGR 18.7-18.6		Lux				
	DIN A.61		h d1 d2 Em Emax				
	UTE 0.88A+0.00T F*1=930 F*1+F*2=999 F*1+F*2+F*3=1000		2 2.2 2.2 337 460				
	CIBSE LG3 L<1500 cd/m² at 65° UGR<19 L<1500 cd/mq @65°		4 4.4 4.4 84 115				
			6 6.7 6.7 37 51				
			8 8.9 8.9 21 29				

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	72	69	66	71	68	68	64	73
1.0	81	76	73	71	75	73	72	69	79
1.5	86	82	80	78	81	79	78	75	86
2.0	89	86	84	83	85	83	82	80	91
2.5	90	89	87	86	87	86	85	82	94
3.0	92	90	89	88	89	88	87	84	96
4.0	93	92	91	90	90	89	88	86	98
5.0	93	93	92	91	91	90	89	87	99

Luminance curve limit

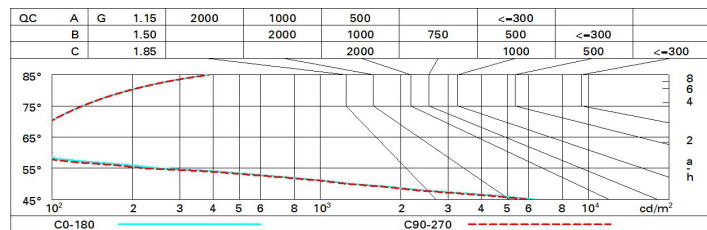

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	19.2	19.9	19.5	20.1	20.3	19.2	19.9	19.5	20.1	20.3
	3H	19.1	19.7	19.4	19.9	20.2	19.1	19.7	19.4	19.9	20.2
	4H	19.0	19.6	19.4	19.9	20.2	19.0	19.5	19.4	19.8	20.1
	6H	19.0	19.4	19.3	19.8	20.1	18.9	19.4	19.3	19.7	20.1
	8H	18.9	19.4	19.3	19.7	20.1	18.9	19.4	19.3	19.7	20.0
	12H	18.9	19.3	19.3	19.7	20.0	18.9	19.3	19.2	19.7	20.0
4H	2H	19.0	19.6	19.4	19.9	20.2	19.0	19.5	19.4	19.8	20.1
	3H	18.9	19.3	19.3	19.7	20.0	18.9	19.3	19.2	19.7	20.0
	4H	18.8	19.2	19.2	19.5	19.9	18.8	19.2	19.2	19.5	19.9
	6H	18.7	19.0	19.1	19.4	19.9	18.7	19.0	19.1	19.4	19.8
	8H	18.7	19.0	19.1	19.4	19.8	18.6	19.0	19.1	19.4	19.8
	12H	18.6	18.9	19.1	19.3	19.8	18.6	18.9	19.0	19.3	19.8
8H	4H	18.7	19.0	19.1	19.4	19.8	18.6	19.0	19.1	19.4	19.8
	6H	18.6	18.8	19.0	19.3	19.7	18.6	18.8	19.0	19.3	19.7
	8H	18.5	18.7	19.0	19.2	19.7	18.5	18.7	19.0	19.2	19.7
	12H	18.5	18.7	19.0	19.1	19.7	18.4	18.6	18.9	19.1	19.6
12H	4H	18.6	18.9	19.1	19.3	19.8	18.6	18.9	19.1	19.3	19.8
	6H	18.5	18.7	19.0	19.2	19.7	18.5	18.7	19.0	19.2	19.7
	8H	18.5	18.7	19.0	19.1	19.7	18.4	18.6	19.0	19.1	19.6
Variations with the observer position at spacing:											
S =		1.0H					4.5 / -23.0				
		1.5H					6.1 / -24.6				
		2.0H					8.1 / -24.8				