


Last information update: October 2023

**Product configuration: BA98**

BA98: Applique white 12Vdc L

**Product code**BA98: Applique white 12Vdc L **Attention! Code no longer in production****Technical description**

Wall- or ceiling-mounted luminaire designed to use white LED light sources with blade-of-light optic. The product is made up of a support base and a screen. The base is made of die-cast aluminium EN1706AC 46100LF and is subjected to a phosphochromatisation process with double primer and 120°C passivation. The liquid acrylic paint is baked at 150°C and ensures high resistance to the external environment and UV rays. The screen is made of ribbed polymethyl-methacrylate. The wall-anchoring plate is made of stainless steel and has dowels M5x10. All screws are made of stainless steel (A2). The product comes complete with the lamp.

**Installation**

Wall and ceiling installation.

**Colour**

Grey (15)

**Mounting**

wall surface|ceiling surface

**Wiring**

Electronic ballast to be ordered separately.

**Notes**


Complete with lamp. On request available with LED cool white (6700K), red, green and amber.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	111	MacAdam Step:	3
W system:	3.8	Life Time LED 1:	50,000h - L70 - B20 (Ta 25°C)
Im source:	235	Ballast losses [W]:	0.3
W source:	3.5	Voltage [Vin]:	12
Luminous efficiency (Im/W, real value):	29.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	47	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -20°C to +35°C.
Colour temperature [K]:	3200	LED current [mA]:	350

Polar

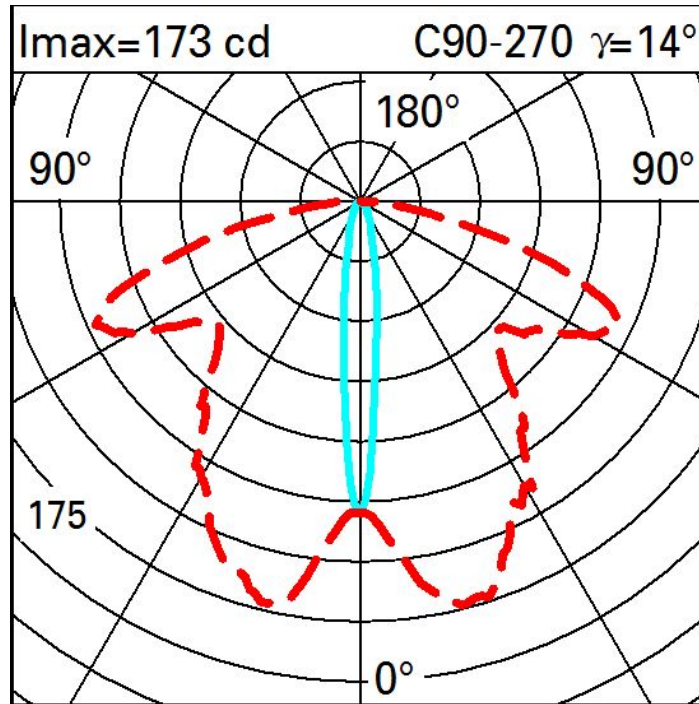

Isolux

