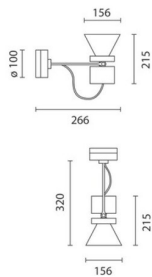


Last information update: May 2024

Product configuration: MR06

MR06: Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic

**Product code**MR06: Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic **Attention! Code no longer in production****Technical description**

Spotlight made of die-cast aluminium and thermoplastic material. The luminaire can be rotated by 340° about the vertical axis and tilted by +/- 100° in relation to the horizontal plane. Hi-precision beam aiming is guaranteed by screw-operated mechanical locks, graduated scales and friction controls. The spotlight is equipped with a die-cast aluminium ballast unit for wall or ceiling mounting. Luminaire for high output LED lamp with monochrome emission in a warm white colour tone (3000K). Dimmable electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

Installation

Wall or ceiling-mounted.

Colour

White (01) | Grey (15)

Mounting

wall arm|wall surface|ceiling surface

Wiring

The dimmable electronic components are housed in the luminaire.

Complies with EN60598-1 and pertinent regulations



850°C

IP20

IP40

for optical assembly

**Technical data**

lm system:	2188	CRI (minimum):	80
W system:	24	Colour temperature [K]:	3000
lm source:	3000	MacAdam Step:	3
W source:	21	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	91.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	1
Beam angle [°]:	48°		


Polar

Imax=3641 cd		CIE		Lux			
				h	d	Em	Emax
		nL 0.73 99-100-100-100-73 UGR 14,0-14,0 DIN A.61 UTE 0.73A+0.00T F*1=989 F*1+F*2=998 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<16 L<1500 cd/mq @65°		2	1.8	715	910
				4	3.6	179	228
				6	5.3	79	101
				8	7.1	45	57

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	60	58	62	59	59	57	78
1.0	68	65	63	61	65	63	62	60	82
1.5	72	70	68	66	69	67	66	64	88
2.0	74	73	71	70	71	70	70	68	93
2.5	76	74	73	72	73	72	72	70	95
3.0	77	76	75	74	74	74	73	71	97
4.0	77	77	76	76	76	75	74	72	99
5.0	78	77	77	77	76	76	75	73	100

Luminance curve limit

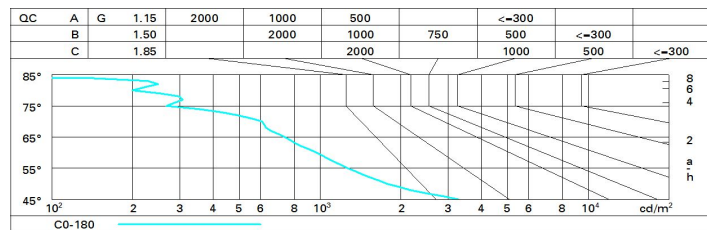

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.5	15.1	14.8	15.3	15.5	14.5	15.1	14.8	15.3	15.5
	3H	14.4	14.9	14.7	15.2	15.4	14.4	14.9	14.7	15.2	15.4
	4H	14.3	14.8	14.7	15.1	15.4	14.3	14.8	14.7	15.1	15.4
	6H	14.3	14.7	14.6	15.0	15.3	14.2	14.7	14.6	15.0	15.3
	8H	14.2	14.6	14.6	15.0	15.3	14.2	14.6	14.6	15.0	15.3
	12H	14.2	14.6	14.6	14.9	15.3	14.2	14.6	14.5	14.9	15.3
4H	2H	14.3	14.8	14.7	15.1	15.4	14.3	14.8	14.7	15.1	15.4
	3H	14.2	14.6	14.6	14.9	15.3	14.2	14.6	14.6	14.9	15.3
	4H	14.1	14.4	14.5	14.8	15.2	14.1	14.4	14.5	14.8	15.2
	6H	14.0	14.3	14.4	14.7	15.1	14.0	14.3	14.4	14.7	15.1
	8H	14.0	14.2	14.4	14.7	15.1	14.0	14.2	14.4	14.7	15.1
	12H	13.9	14.2	14.4	14.6	15.1	13.9	14.2	14.4	14.6	15.1
8H	4H	14.0	14.2	14.4	14.7	15.1	14.0	14.2	14.4	14.7	15.1
	6H	13.9	14.1	14.3	14.5	15.0	13.9	14.1	14.3	14.5	15.0
	8H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	12H	13.8	13.9	14.3	14.4	14.9	13.8	13.9	14.3	14.4	14.9
12H	4H	13.9	14.2	14.4	14.6	15.1	13.9	14.2	14.4	14.6	15.1
	6H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	8H	13.8	13.9	14.3	14.4	14.9	13.8	13.9	14.3	14.4	14.9
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -14.2					6.1 / -14.2				
	1.5H	8.9 / -15.7					8.9 / -15.7				
	2.0H	10.9 / -16.4					10.9 / -16.4				