


Last information update: October 2024

**Product configuration: Q250**

Q250: 5 cell Recessed luminaire - Tunable White - Flood optic



**Product code**

Q250: 5 cell Recessed luminaire - Tunable White - Flood optic

**Technical description**

Rectangular 5 optic element recessed miniaturised luminaire. LED lamps with different colour temperatures that allow them to be modulated. This variation is achieved by mixing the emission of 3 x 2700K high CRI LEDs and 2 x 5700K high CRI LEDs. Despite the disparity of the lamps when the two end channels are used - 2700K and 5700K - the intensity of the flux emitted is the same. The colour temperature also remains uniform and constant even when different size products are used together. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics - flood beam - set back from the black anti-glare screen. The structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with an integrated (basic) power system that allows the colour temperature to be varied, without using any extra components, but simply by pressing the buttons (max 4 products). Using the 6170 + M630 codes you can obtain a simple and intuitive DALI programmable solution with touch-screen. There are also other control systems available with different codes for large systems that require specialised technicians for their programming: the MH97 + MH93 + MI02 group can be used for a DALI / KNX programmable solution - the MH97 + MH93 + M618 group can be used to extend the control of the system to remote supports such as tablets and smart phones.

**Installation**

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

**Colour**

White (01) | Black / Black (43) | Black / White (47) | Grey / Black (74)


**Mounting**

wall recessed|ceiling recessed

**Wiring**

Various management solutions are available with a separate code. For technical data, properties and connection modes see the instruction sheet.


Complies with EN60598-1 and pertinent regulations



**Technical data**

Im system:	678	CRI (typical):	97
W system:	8.9	Colour temperature [K]:	Tunable white 2700 - 5700
Im source:	850	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
W source:	8.9	Lamp code:	LED
Luminous efficiency (Im/W, real value):	76.2	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	80	LED current [mA]:	700
Beam angle [°]:	30°		


**Polar**

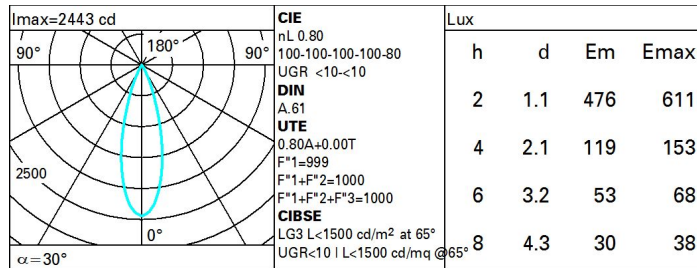

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	64	68	65	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	76	75	73	76	74	73	71	89
2.0	81	80	78	77	78	77	76	74	93
2.5	83	82	80	80	80	79	79	76	96
3.0	84	83	82	81	82	81	80	78	98
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	84	84	84	83	82	80	100

Luminance curve limit

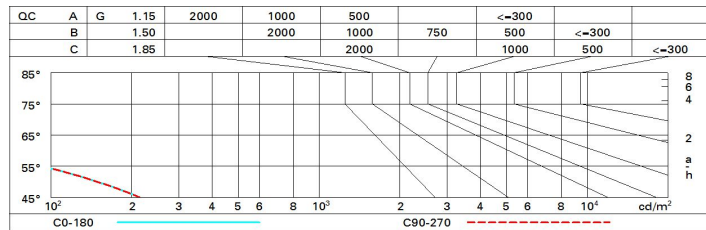

UGR diagram

Corrected UGR values (at 850 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-0.1	-5.6	-5.8	-5.4	-5.1	-0.1	-5.6	-5.8	-5.4	-5.1
	3H	-0.2	-5.8	-5.9	-5.5	-5.2	-0.2	-5.8	-5.9	-5.5	-5.2
	4H	-0.3	-5.9	-6.0	-5.6	-5.3	-0.3	-5.9	-6.0	-5.6	-5.3
	6H	-0.3	-6.0	-6.0	-5.6	-5.3	-0.4	-6.0	-6.0	-5.7	-5.4
	8H	-0.4	-6.0	-6.0	-5.7	-5.3	-0.4	-6.0	-6.1	-5.7	-5.4
	12H	-0.4	-6.0	-6.0	-5.7	-5.4	-0.5	-6.1	-6.1	-5.8	-5.4
4H	2H	-0.3	-5.9	-6.0	-5.6	-5.3	-0.3	-5.9	-6.0	-5.6	-5.3
	3H	-0.4	-6.1	-6.1	-5.7	-5.4	-0.4	-6.0	-6.0	-5.7	-5.4
	4H	-0.5	-6.2	-6.1	-5.8	-5.4	-0.5	-6.2	-6.1	-5.8	-5.4
	6H	-0.6	-6.3	-6.1	-5.9	-5.5	-0.6	-6.3	-6.1	-5.9	-5.5
	8H	-0.6	-6.3	-6.2	-5.9	-5.5	-0.6	-6.4	-6.2	-5.9	-5.5
	12H	-0.6	-6.4	-6.2	-6.0	-5.5	-0.7	-6.4	-6.2	-6.0	-5.5
8H	4H	-0.6	-6.4	-6.2	-5.9	-5.5	-0.6	-6.3	-6.2	-5.9	-5.5
	6H	-0.7	-6.5	-6.2	-6.0	-5.5	-0.7	-6.4	-6.2	-6.0	-5.5
	8H	-0.7	-6.5	-6.2	-6.1	-5.6	-0.7	-6.5	-6.2	-6.1	-5.6
	12H	-0.7	-6.6	-6.2	-6.1	-5.6	-0.7	-6.6	-6.2	-6.1	-5.6
12H	4H	-0.7	-6.4	-6.2	-6.0	-5.5	-0.6	-6.4	-6.2	-6.0	-5.5
	6H	-0.7	-6.5	-6.2	-6.1	-5.6	-0.7	-6.5	-6.2	-6.0	-5.5
	8H	-0.7	-6.6	-6.2	-6.1	-5.6	-0.7	-6.6	-6.2	-6.1	-5.6
Variations with the observer position at spacing:											
S =	1.0H	6.4 / -8.9					6.4 / -8.9				
	1.5H	9.2 / -10.1					9.2 / -10.1				
	2.0H	11.2 / -10.6					11.2 / -10.6				