


Last information update: October 2024

Product configuration: Q256

Q256: Frame Recessed luminaire - Tunable White LED - Wall washer optic



Product code

Q256: Frame Recessed luminaire - Tunable White LED - Wall washer optic

Technical description

Miniaturized recessed rectangular luminaire. LED lamps with different colour temperatures that allow them to be modulated. This variation is achieved by mixing the emission of 5 x 2700K high CRI LEDs and 5 x 2,700K high CRI LEDs. The colour temperature remains uniform and constant even when different size products are used together and with an uneven number of warm and cold LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Asymmetrical optic system designed to achieve an effective wall washer distribution. Flux enhancer - superpure aluminium reflector - screen in PMMA with ribbed texture; a special film in acrylic material, combined with the screen, allow for a uniform and effective light emission on the wall. Black polycarbonate internal perimeter frame. Using the 6170 + M630 codes you can obtain a simple and intuitive DALI programmable solution with touch-screen. There are also other control systems available with different codes for large systems that require specialised technicians for their programming: the MH97 + MH93 + MI02 group can be used for a DALI / KNX programmable solution - the MH97 + MH93 + M618 group can be used to extend the control of the system to remote supports such as tablets and smart phones.

Installation

recessed with steel springs for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal) - preparation slot 37 x 274. To light the wall correctly check the installation distances and centre-to-centre distances on the instructions sheet.

Colour

Black / Black (43) | Black / White (47)

Mounting

wall recessed|ceiling recessed


Wiring

Various management solutions are available with a separate code. For technical data, properties and connection modes see the instruction sheet.

Notes

Accessory anti-glare screen available code MXP8.


Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|------|---------------------------------------|-------------------------------|
| Im system: | 683 | CRI (typical): | 97 |
| W system: | 18 | Colour temperature [K]: | Tunable white 2700 - 5700 |
| Im source: | 1750 | Life Time LED 1: | 50,000h - L90 - B10 (Ta 25°C) |
| W source: | 18 | Lamp code: | LED |
| Luminous efficiency (lm/W, real value): | 37.9 | Number of lamps for optical assembly: | 1 |
| Im in emergency mode: | - | ZVEI Code: | LED |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Number of optical assemblies: | 1 |
| Light Output Ratio (L.O.R.) [%]: | 39 | LED current [mA]: | 550 |

Polar

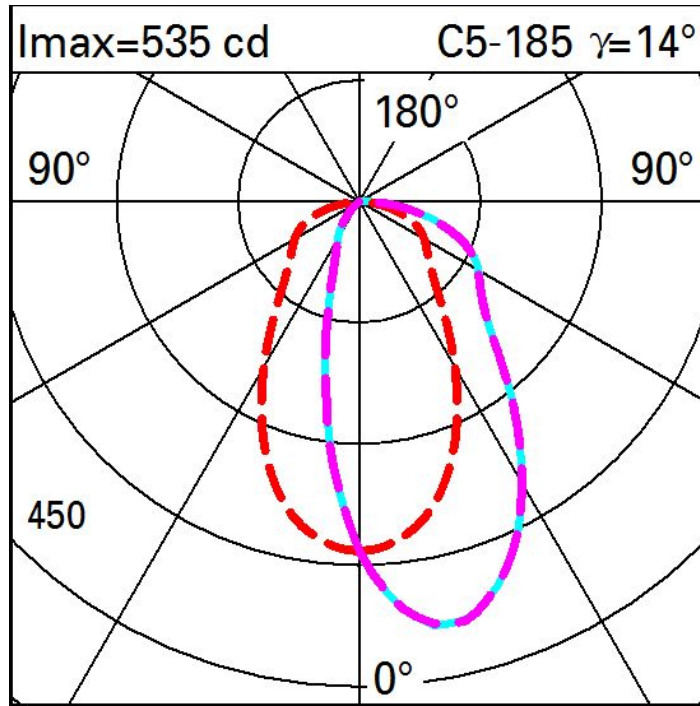

Illuminances

Lux Wall distance = 1m

| | | | | | | | | | | | |
|---|---|----|----|----|----|-----|----|----|----|---|---|
| 3 | | | | | | ● | | | | | |
| | 2 | 4 | 10 | 25 | 66 | 115 | 66 | 25 | 10 | 4 | 2 |
| 2 | 4 | 7 | 14 | 29 | 60 | 83 | 60 | 29 | 14 | 7 | 4 |
| | 4 | 7 | 13 | 27 | 49 | 63 | 49 | 27 | 13 | 7 | 4 |
| 1 | 4 | 6 | 11 | 22 | 35 | 42 | 35 | 22 | 11 | 6 | 4 |
| | 3 | 6 | 10 | 16 | 23 | 26 | 23 | 16 | 10 | 6 | 3 |
| 0 | | | | | | | | | | | |
| | m | -2 | -1 | 0 | 1 | 2 | 3 | | | | |